

AD-A152 040

AFWAL-TR-84-2048



DAMAGE CAUSED TO POLYURETHANE FOAMS BY AGING,
SIMULATED SUNLIGHT EXPOSURE, HEAT AND FIRE

Leo Parts
MONSANTO RESEARCH CORPORATION
DAYTON LABORATORY
1515 NICHOLAS RD.
DAYTON, OHIO 45407

Thomas A. Hogan and Thomas J. Condon
AERO PROPULSION LABORATORY
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433

JULY 1984

FINAL REPORT FOR PERIOD 15 JANUARY 1983 - 30 SEPTEMBER 1983

Approved for public release; distribution unlimited.

AERO PROPULSION LABORATORY
AIR FORCE WRIGHT AERONAUTICAL LABORATORIES
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433


85 03 18 101


NOTICE


When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This report has been reviewed by the Office of Public Affairs (ASD/PA) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.


This technical report has been reviewed and is approved for publication.


J. R. Manheim
Project Engineers


T. Dues
Project Engineers


R. G. Clodfelter
Chief, Fire Protection Branch

FOR THE COMMANDER:

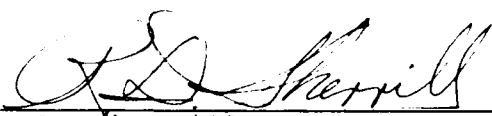
R. D. Sherrill
Chief, Fuels and Lubrication Division

If your address has changed, if you wish to be removed from our mailing list, or if the addressee is no longer employed by your organization, please notify AFWAL/POSH, Wright-Patterson Air Force Base, Ohio. 45433 to help maintain a current mailing list.

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM																				
1. REPORT NUMBER AFWAL-TR-84-2048	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER																				
4. TITLE (and Subtitle) DAMAGE CAUSED TO POLYURETHANE FOAMS BY AGING, SIMULATED SUNLIGHT EXPOSURE, HEAT, AND FIRE		5. TYPE OF REPORT & PERIOD COVERED FINAL REPORT FOR PERIOD 15 Jan 1983 - 30 Sept 1983																				
		6. PERFORMING ORG. REPORT NUMBER MRC-DA-1150																				
7. AUTHOR(s) Leo Parts, Monsanto Company Thomas A. Hogan and Thomas J. Condron, Aero Propulsion Laboratory		8. CONTRACT OR GRANT NUMBER(s) F33615-78-C-2023 F33615-81-C-2035																				
9. PERFORMING ORGANIZATION NAME AND ADDRESS Monsanto Company 1515 Nicholas Road Dayton, Ohio 45407		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS P.E. 62203F Project 3048 05 15																				
11. CONTROLLING OFFICE NAME AND ADDRESS Aero Propulsion Laboratory (AFWAL/POSH) Air Force Wright Aeronautical Laboratories (AFSC) Wright-Patterson AFB, Ohio 45433		12. REPORT DATE July 1984																				
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 294																				
		15. SECURITY CLASS. (of this report) UNCLASSIFIED																				
15a. DECLASSIFICATION DOWNGRADING SCHEDULE																						
16. DISTRIBUTION STATEMENT (of this Report) Approved for Public Release; Distribution Unlimited.																						
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)																						
18. SUPPLEMENTARY NOTES																						
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) <table border="0"> <tr> <td>Accident</td> <td>Degradation</td> <td>Fuel</td> <td>Polyurethane</td> </tr> <tr> <td>Aging</td> <td>Deposit</td> <td>Heat</td> <td>Reticulated</td> </tr> <tr> <td>Damage</td> <td>Fire</td> <td>Ignition</td> <td>Simulation</td> </tr> <tr> <td>Char</td> <td>Flame</td> <td>Incident</td> <td>Sunlight</td> </tr> <tr> <td>Burning</td> <td>Foam</td> <td>Photograph</td> <td>Surface</td> </tr> </table>			Accident	Degradation	Fuel	Polyurethane	Aging	Deposit	Heat	Reticulated	Damage	Fire	Ignition	Simulation	Char	Flame	Incident	Sunlight	Burning	Foam	Photograph	Surface
Accident	Degradation	Fuel	Polyurethane																			
Aging	Deposit	Heat	Reticulated																			
Damage	Fire	Ignition	Simulation																			
Char	Flame	Incident	Sunlight																			
Burning	Foam	Photograph	Surface																			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) <p>Damage caused to reticulated polyurethane foams by aging (in air and liquid fuel), simulated sunlight exposure, hot wire cutting, hot air impingement, flame impingement, and sustained burning was investigated. The experiments simulated all conceivable types of environmental and unplanned exposure of these foams when used as explosion suppressant materials in aircraft fuel systems. Both polyether- and polyester-based polyurethanes were used.</p>																						

**DTIC
SELECTED**
APR 04 1985
S E

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

(Block 20, continued)

It was demonstrated that the physical appearance of foams is often indicative of past exposure. A detailed photographic record of exposed specimens was obtained. The compilation of photographs, in conjunction with written description of damage, will serve as a reference for aircraft and fire accident investigators.

UNCLASSIFIED


SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

PREFACE

This is a summary Technical Report prepared by Monsanto Research Corporation, Dayton Laboratory. The effort was sponsored by the Air Force Wright Aeronautical Laboratories, Air Force Systems Command, Wright-Patterson AFB, Ohio; it was performed under Contracts F33615-78-C-2023 and F33615-81-C-2035 during the period 15 January 1983 - 30 September 1983. Dr Jon R. Manheim, AFWAL/POSH and Mr Tim Dues, AFWAL/POSF, served as Project Engineers.

Dr Leo Parts was technically responsible for the work at Monsanto Research Corporation. Messrs Thomas A. Hogan and Thomas J. Condron of the Fire Protection Branch, Aero Propulsion Laboratory, AFWAL, represented the Air Force part of the program team.

The following persons and organizations contributed significantly in the performance of this program. Mr Benjamin H. Wilt, University of Dayton Research Institute, supervised the accelerated aging testing of foam specimens. Mr J. Douglas Wolf, also of University of Dayton Research Institute, performed the instrumental surface analyses of foam specimens.. Blosser Color Laboratory, Inc., processed the color film and made the color prints.

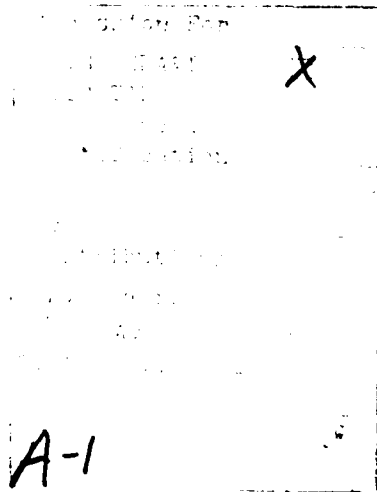

*Original contains color
photomicrographs
which will be in black and
white

TABLE OF CONTENTS

	<u>Page</u>
1. INTRODUCTION.	1
2. EXPERIMENTAL.	4
2.1 Foam Samples	4
2.2 Exposure of Polyurethane Foams to Aging, Simulated Sunlight, Heat, and Flames	5
2.2.1 Aging in Air	5
2.2.2 Aging in Jet Fuel.	6
2.2.3 Simulated Sunlight Exposure.	6
2.2.4 Hot Wire Cutting	6
2.2.5 Hot Air Impingement.	6
2.2.6 Radiant Heat Exposure.	7
2.2.7 Brief Flame Impingement.	7
2.2.8 Sustained Burning.	7
2.2.9 Flash Fire	7
2.2.10 Exposure Test Plan and Sample Code	13
2.3 Laboratory-Scale, Controlled Degradation Experiments With Blue Polyurethane Foam.	18
2.3.1 Thermogravimetric Analysis	18
2.3.2 Pyrolysis and Thermo-oxidative Degradation of Blue Foam Under Controlled Conditions	18
2.3.3 Infrared Spectroscopic Analysis of Degradation Products	19
2.4 Examination and Analysis of Polyurethane Samples Recovered From Aircraft Incident Sites	19
2.4.1 Visual Examination	19
2.4.2 Infrared Reflectance Spectroscopic Analysis.	21
2.4.3 Emission Spectroscopic Analysis.	22
2.4.4 Surface Analysis	22
3. RESULTS AND DISCUSSION.	24
3.1 Exposure of Polyurethane Foams to Aging, Simulated Sunlight, Heat, and Flames	24
3.1.1 Aging in Air	24
3.1.2 Aging in Jet Fuel.	26
3.1.3 Simulated Sunlight Exposure.	26
3.1.4 Hot Wire Cutting	29
3.1.5 Hot Air Flow	29
3.1.6 Radiant Heat Flux.	32
3.1.7 Brief Flame Impingement.	34
3.1.8 Sustained Burning.	34
3.1.9 Summary of Observed Effects of Aging and Simulated Sunlight, Heat, and Fire Exposure on Polyurethane Foams	38

TABLE OF CONTENTS (continued)

	<u>Page</u>
3.2 Flash Fire Exposure.	38
3.2.1 Effect of Foam Geometry.	43
3.2.2 Effect of Foam Type.	44
3.2.3 Effect of Hydrocarbon Vapor Concentration; Dry vs. Fuel-Wetted Foam.	47
3.2.4 Effect of Foam Aging	48
3.2.5 Effect of Pressure	49
3.3 Laboratory-Scale, Controlled Degradation Experiments With Blue Polyurethane Foam.	50
3.3.1 Thermogravimetric Analysis	50
3.3.2 Pyrolysis and Thermo-Oxidative Degradation of Blue Foam Under Controlled Conditions	50
3.3.3 Infrared Spectroscopic Analysis of Degradation Products	51
3.4 Examination and Analysis of Polyurethane Foam Samples Recovered from Aircraft Incident Sites	57
3.4.1 Foam from Fuel Vent Tanks.	57
3.4.2 Fuel Tank Foam	60
3.4.3 Wipings from Vent Masts and from Right Side Vent, Tank Dome	66
3.4.4 Emission Spectrographic Analysis of Specimens from Aircraft Incident Sites	69
3.4.5 Surface Analysis of Foam Specimen from Aircraft No. 78-717 Fuel Vent Tank	70
4. CONCLUSIONS	73
REFERENCES.	74
APPENDICES	
1. Photographic Documentation of Test Specimens	77
A1.1 Introduction.	78
A1.2 Figures Depicting Foam Samples from Accelerated Aging Tests in Air.	82
A1.3 Figures Depicting Foam Samples from Accelerated Aging Tests in JP-5	92
A1.4 Figures Depicting Samples from Simulated Sunlight Exposure Test.	99
A1.5 Figures Depicting Foam Samples from Hot Wire Cutting Experiments.	110
A1.6 Figures Depicting Samples from Hot Air Impingement Experiments	114
A1.7 Figures Depicting Foam Samples from Radiant Heat Exposure Experiments	124
A1.8 Figures Depicting Foam Samples from Brief Flame Impingement Experiments	134

TABLE OF CONTENTS (continued)

	<u>Page</u>
APPENDICES (continued)	
A1.9 Figures Depicting Foam Samples from Sustained Burning Experiments	150
A1.10 Figures Depicting Foam Samples from Flash Fire Experiments.	166
2. Brown-Stained Blue Foam in F-4 Aircraft.	224
3. Analysis of Soot-Stained Red Foam in A-10 Aircraft.	235
4. Tensile Strengths of Polyurethane Foams as Functions of Aging.	241
5. Report on Accelerated Aging of Foam Specimens in Simulated Sunlight Test Chamber, Humidity Cabinet, and Air Oven.	244
Introduction.	247
Procedure	247
6. Emission Spectrographic Analysis Report on Polyurethane Foam from an A-10 Aircraft.	257
7. Surface Analysis Report on Polyurethane Foam from an A-10 Aircraft	260

LIST OF FIGURES

<u>Number</u>		<u>Page</u>
1	Flash fire test system.	8
2	Cross-sectional view of flame tube in unvented configuration	10
3	Cross-sectional view of flame tube in vented configuration	11
4	Sample of the tan-colored solid formed upon pyrolysis of blue foam.	21
5	Cross-sectional views of foam specimens subjected to accelerated aging in air (8-5-1, five weeks; 8-2-5, two weeks; 8-2-7, two weeks)	25
6	Red foam specimen, after three weeks of accelerated aging in air.	27
7	Yellow foam specimen, after three weeks of accelerated aging in air.	27
8	Cross-sectional views of foam specimens subjected to accelerated aging in jet fuel (JP-5)	28
9	Cross-sectional views of foam specimens subjected to 200 hours of simulated sunlight exposure	30
10	Magnified view of hot-wire-cut blue foam surface	30
11	Cross-sectional views of foam specimens subjected to hot air impingement.	31
12	Cross-sectional close-up view of red foam specimen subjected to hot air impingement	33
13	Cross-sectional views of foam specimens subjected to radiant heating.	33
14	Cross-sectional views of foam specimens subjected to brief flame impingement.	35
15	Cross-sectional views of specimens that had been involved in sustained top surface burning in horizontal position	35

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
16	Cross-sectional view of red foam specimen from sustained horizontal top-burning experiments. . .	36
17	Cross-sectional view of fuel-soaked blue foam specimen that had been involved in sustained burning in horizontal position.	36
18	Cross-sectional view of fuel-soaked blue foam specimen that had been involved in sustained burning in vertical position.	37
19	Blue foam damage pattern, Test 22	45
20	Blue foam damage pattern, Test 5.	45
21	Red foam damage pattern, Test 16.	46
22	Yellow foam damage pattern, Test 25	46
23	Thermogram and differential thermogram for degradation of blue polyurethane foam in air. . .	52
24	Thermogram and differential thermogram for degradation of blue polyurethane foam in helium. . .	53
25	Infrared absorption spectrum of blue polyurethane foam	54
26	Infrared absorption spectrum of the solid, tan-colored pyrolysis product formed from blue polyurethane foam.	55
27	Infrared absorption spectrum of the liquid, brown-colored pyrolysis product formed from blue polyurethane foam.	56
28	Fuel vent tank foam, left half, A/C 78-717 (Specimen No. 1).	58
29	Fuel vent tank foam, right half, A/C 78-717 (Specimen No. 2).	58
30	Fuel vent tank foam, left half, A/C 78-704 (Specimen No. 3).	59
31	Close-up view of the damaged segment of fuel vent tank foam from A/C 78-704 (Specimen No. 3). . . .	59

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
32	Two halves of fuel vent tank foam from A/C 78-717 (Specimens Nos. 1 and 2) placed together.	61
33	Close-up view of white powder deposit on the surface of fuel tank foam (Specimen No. 1). . . .	62
34	Left halves of fuel tank foam from A/C-s 78-704 and 78-717	63
35	Wing tank foam, A/C 78-717 (Specimen No. 4) . . .	64
36	Fire-damaged surface of fuel tank foam (Specimen No. 4).	64
37	Close-up view of the fire-damaged surface of fuel tank foam (Specimen No. 4)	65
38	Foam pieces from the wing tank of A/C 78-717 (Specimens Nos. 5-8).	67
39	Inside view of foam specimen from the wing tank of A/C 78-717.	67
40	Infrared spectrum of wipings from vent mast of A/C 78-704 (Specimen No. 11; in KBr matrix) . . .	68
41	Light microscope photograph of deposit (white areas) on vent tank foam from A/C 78-717 (50X). .	71
42	Scanning electron photomicrograph of deposit on vent tank foam from A/C 78-717 (100X).	71
43	Scanning electron photomicrograph of deposit on vent tank foam from A/C 78-717 (100X).	72
44	Scanning electron photomicrograph of deposit on vent tank foam from A/C 78-717 (1000X)	72
A1-1	Magnified view of the Type IV	80
A1-2	Magnified view of the red foam structure.	80
A1-3	Magnified view of the yellow foam structure . . .	81

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-4	Cross-sectional views of blue, red, and yellow foam specimens, subjected to accelerated aging in air (8-5-1, five weeks; 8-2-5, two weeks; 8-2-7, two weeks)	83
A1-5	Specimens of blue foam, subjected to accelerated aging in air at 200°F (93°C) for one to five weeks. (Reference sample of unexposed foam is also shown).	83
A1-6	Sample 8-1-1, perspective view.	84
A1-7	Sample 8-3-1, perspective view.	84
A1-8	Sample 8-5-1, perspective view.	85
A1-9	Sample 8-5-1, cross-sectional view.	85
A1-10	Specimens of red foam, subjected to accelerated aging in air at 200°F (93°C) for one to three weeks	86
A1-11	Sample 8-1-5, perspective view.	86
A1-12	Sample 8-2-5, perspective view.	87
A1-13	Sample 8-2-5, cross-sectional view.	87
A1-14	Red foam specimen 8-3-5, after three weeks of accelerated aging in air at 200°F (93°C).	88
A1-15	Specimens of yellow foam, subjected to accelerated aging in air at 200°F (93°C) for one to three weeks.	89
A1-16	Sample 8-1-7, perspective view.	89
A1-17	Sample 8-2-7, perspective view.	90
A1-18	Sample 8-2-7, cross-sectional view.	90
A1-19	Yellow foam specimen 8-3-7, after three weeks of accelerated aging in air at 200°F (93°C).	91
A1-20	Cross-sectional view of blue, red, and yellow foam specimens, subjected to accelerated aging in JP-5 for five weeks.	93

LIST OF TABLES (continued)

<u>Number</u>		<u>Page</u>
A2-6	Fuel Additives for JP-4 and JP-8, and Fuel Leak Testing Dyes.	235
A5-1	Exposure Schedule for Blue Foams.	249
A5-2	Blue Foam Specimen Discoloration and Chamber Temperature During Operation of Sunlighter. . . .	250
A5-3	Exposure Schedule for Red and Yellow Foams. . . .	252
A5-4	Red and Yellow Foam Specimen Discoloration and Chamber Temperature During Operation of Sunlighter	253
A5-5	Exposure Schedule for Blue, Red, and Yellow Foams. Accelerated Aging at 200°F, 95% RH. . . .	255
A5-6	Exposure Schedule for Blue, Red, and Yellow Foams. Accelerated Aging at 200°F in JP-5. . . .	256

LIST OF TABLES

<u>Number</u>		<u>Page</u>
1	Hot Wire Cutting. Test Plan and Sample Code. . .	14
2	Brief Flame Impingement. Exposure Test Plan and Sample Code	14
3	Sustained Burning. Exposure Test Plan and Sample Code	15
4	Hot Air Impingement. Exposure Test Plan and Sample Code	15
5	Radiant Heat Exposure. Test Plan and Sample Code	16
6	Accelerated Aging in Simulated Sunlight. Exposure Test Plan and Sample Code.	16
7	Accelerated Aging in Air. Exposure Test Plan and Sample Code	17
8	Accelerated Aging in Jet Fuel. Exposure Test Plan and Sample Code.	17
9	Pyrolysis and Thermo-Oxidative Degradation Experiments with Blue Polyurethane Foam Under Controlled Conditions	20
10	Elemental Analysis Results.	20
11	Summary of Observed Effects of Aging, and Simulated Sunlight, Heat, and Fire Exposure on Polyurethane Foams	39
12	Flash Fire Tests with Flame Tube.	40
13	Summary of TGA and DTG Data for Blue Polyurethane Foam in Air and Helium Atmospheres.	51
A2-1	Physical Properties of Foam Samples	229
A2-2	Soxhlet Extraction Results.	230
A2-3	Elemental Analysis Results for Extracts	230
A2-4	Summary of Extraction Test Results.	233
A2-5	Results for Metal Analyses.	234

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A2-1	F-4 brown-stained foam compared with new blue foam	226
A2-2	View of F-4 brown-stained foam in the fuel cell .	226
A2-3	Sample locations, F-4 (brown -stained) foam . . .	227
A2-4	Infrared spectrum of acetone extract from F-4 (brown-stained) foam.	231
A2-5	Infrared spectrum of acetone extract from fresh blue foam	231
A2-6	Ultraviolet spectra of acetone extracts from F-4 (brown-stained) foam and fresh blue foam.	232
A3-1	Red foam from A-10 aircraft (SN 75-00293) vent collector tank.	239
A3-2	End view of red foam vent collector tank kit. . .	239
A4-1	Tensile strengths of polyurethane foam in accelerated aging tests in air.	242
A4-2	Tensile strengths of polyurethane foam in accelerated fuel immersion aging tests.	243
A7-1	Deposit on filter (10X)	263
A7-2	Deposit on filter (100X).	263
A7-3	Deposit on filter (1000X)	264
A7-4	EDXA spectra of deposit on filter	264
A7-5	Control sample (100X)	265
A7-6	EDXA of control	265
A7-7	Light microscope photograph of deposit (white areas) 50X	266
A7-8	Low resolution XPS scan	267
A7-9	High resolution XPS scan.	268

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-215	Sample 1-A-28, perspective front view	209
A1-216	Sample 1-3-28, direct front view.	209
A1-217	Sample 1-3-28, cross-sectional view	210
A1-218	Sample 1-3-31, perspective front view	211
A1-219	Sample 1-3-31, direct front view.	211
A1-220	Sample 1-3-31, cross-sectional view	212
A1-221	Sample 1-3-34, perspective front view	213
A1-222	Sample 1-3-34, direct front view.	213
A1-223	Sample 1-3-34, cross-sectional view	214
A1-224	Sample 1-3-37, perspective front view	215
A1-225	Sample 1-3-37, direct front view.	215
A1-226	Sample 1-3-37, cross-sectional view	216
A1-227	Sample 1-E-39, perspective front view	217
A1-228	Sample 1-E-39, direct front view.	217
A1-229	Sample 1-E-39, close-up view of front surface . .	218
A1-230	Sample 1-E-39, cross-sectional view	218
A1-231	Sample 1-E-39, close-up cross-sectional view. . .	219
A1-232	Sample 1-3-40, perspective front view	220
A1-233	Sample 1-3-40, direct front view.	220
A1-234	Sample 1-3-40, cross-sectional view	221
A1-235	Sample 1-3-43, perspective front view	222
A1-236	Sample 1-3-43, direct front view.	222
A1-237	Sample 1-3-43, cross-sectional view	223

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-195	Sample 1-1-17, close-up cross-sectional view, upper left quadrant	197
A1-196	Sample 1-1-20, perspective front view	198
A1-197	Sample 1-1-20, direct front view.	198
A1-198	Sample 1-1-20, close-up front view, upper left quadrant	199
A1-199	Sample 1-1-22, perspective front view	200
A1-200	Sample 1-1-22, direct front view.	200
A1-201	Sample 1-1-22, close-up front view, upper left quadrant	201
A1-202	Sample 1-1-22, cross-sectional view	201
A1-203	Sample 1-1-23, perspective front view	202
A1-204	Sample 1-1-23, direct front view.	202
A1-205	Sample 1-1-23, close-up front view, upper left quadrant	203
A1-206	Sample 1-1-23, cross-sectional view	203
A1-207	Sample 1-1-25, perspective front view	204
A1-208	Sample 1-1-25, direct front view.	204
A1-209	Sample 1-1-25, close-up front view, upper left quadrant	205
A1-210	Sample 1-1-25, cross-sectional view	205
A1-211	Sample 1-1-25, close-up cross-sectional view, upper left quadrant	206
A1-212	Sample 1-A-26, perspective front view	207
A1-213	Sample 1-A-26, direct front view.	207
A1-214	Sample 1-A-26, cross-sectional view	208

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-175	Sample 1-1-11, close-up view of front surface, upper left corner	186
A1-176	Sample 1-1-11, cross-sectional view	186
A1-177	Close-up cross-sectional view, upper right corner.	187
A1-178	Sample 1-1-12, perspective front view	188
A1-179	Sample 1-1-12, direct front view.	188
A1-180	Sample 1-1-12, close-up view of front surface, upper left and central areas.	189
A1-181	Sample 1-1-12, cross-sectional view	189
A1-182	Sample 1-1-14, perspective front view	190
A1-183	Sample 1-1-14, direct front view.	190
A1-184	Sample 1-1-14, close-up front view, upper left quadrant	191
A1-185	Sample 1-1-14, cross-sectional view	191
A1-186	Sample 1-1-14, close-up cross-sectional view, upper left quadrant	192
A1-187	Sample 1-1-16, perspective front view	193
A1-188	Sample 1-1-16, direct front view.	193
A1-189	Sample 1-1-16, close-up front view, upper left quadrant	194
A1-190	Sample 1-1-16, cross-sectional view	194
A1-191	Sample 1-1-17, perspective front view	195
A1-192	Sample 1-1-17, direct front view.	195
A1-193	Sample 1-1-17, close-up front view, upper left quadrant	196
A1-194	Sample 1-1-17, cross-sectional view	196

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-153	Sample 1-A-1, cross-sectional view, upper left corner	174
A1-154	Sample 1-1-5, perspective front view.	175
A1-155	Sample 1-1-5, direct front view	175
A1-156	Sample 1-1-5, close-up view of front surface. . .	176
A1-157	Sample 1-1-5, direct rear view.	176
A1-158	Sample 1-2-5, perspective front view.	177
A1-159	Sample 1-2-5, direct front view	177
A1-160	Sample 1-2-5, close-up view of front surface. . .	178
A1-161	Sample 1-2-5, direct rear view.	178
A1-162	Sample 1-2-5, cross-sectional view.	179
A1-163	Sample 1-2-5, close-up cross-sectional view, upper left quadrant	179
A1-164	Sample 1-D-7, perspective front view.	180
A1-165	Sample 1-D-7, direct front view	180
A1-166	Sample 1-D-7, close-up view of front surface, upper right corner.	181
A1-167	Sample 1-D-7, cross-sectional view.	181
A1-168	Sample 1-D-7, close-up cross-sectional view . . .	182
A1-169	Sample 1-D-10, perspective front view	183
A1-170	Sample 1-D-10, direct front view.	183
A1-171	Sample 1-D-10, close-up view of front surface, upper left and central areas.	184
A1-172	Sample 1-D-10, close-up view of the vent area . .	184
A1-173	Sample 1-1-11 perspective front view.	185
A1-174	Sample 1-1-11, direct front view.	185

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-133	Sample 4-3-11, perspective view	161
A1-134	Sample 4-3-11, cross-sectional view	161
A1-135	Perspective view of yellow foam specimens, subjected to sustained burning. Samples ignited by flame from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively	162
A1-136	Sample 4-1-15, perspective view	163
A1-137	Sample 4-1-15, cross-sectional view	163
A1-138	Sample 4-2-15, perspective view	164
A1-139	Sample 4-2-15, cross-sectional view	164
A1-140	Sample 4-3-14, cross-sectional view	165
A1-141	Sample 4-3-14, perspective view	165
A1-142	Cross-sectional view of flame tube in unvented configuration	168
A1-143	Cross-sectional view of flame tube in vented configuration	169
A1-144	Sample 1-1-1, perspective front view.	170
A1-145	Sample 1-1-1, direct front view	170
A1-146	Sample 1-1-1, close-up front view	171
A1-147	Sample 1-1-1, direct rear view.	171
A1-148	Sample 1-1-1, cross-sectional view.	172
A1-149	Sample 1-A-1, perspective front view.	172
A1-150	Sample 1-A-1, direct front view	173
A1-151	Sample 1-A-1, close-up front view, upper left corner	173
A1-152	Sample 1-A-1, close-up front view, upper right corner.	174

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-115	Perspective view of blue foam specimens subjected to sustained burning. Samples ignited by flame from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively	151
A1-116	Sample 4-1-3, perspective view.	152
A1-117	Sample 4-1-3, cross-sectional view.	152
A1-118	Sample 4-2-2, perspective view.	153
A1-119	Sample 4-2-2, cross-sectional view.	153
A1-120	Sample 4-3-3, perspective view.	154
A1-121	Sample 4-3-3, cross-sectional view.	154
A1-122	Sample 4-1-4 (wet, new foam), perspective view. .	155
A1-123	Sample 4-1-4 (wet, new foam), cross-sectional view.	155
A1-124	Sample 4-2-5 (wet, new foam), perspective view. .	156
A1-125	Sample 4-2-5 (wet, new form), cross-sectional view.	156
A1-126	Sample 4-1-9 (aged, dry foam), perspective view .	157
A1-127	Sample 4-1-9 (aged, dry foam), cross-sectional view.	157
A1-128	Perspective view of red foam specimens, subjected to sustained burning. Samples ignited by flame from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively	158
A1-129	Sample 4-1-12, perspective view	159
A1-130	Sample 4-1-12, cross-sectional view	159
A1-131	Sample 4-2-11, perspective view	160
A1-132	Sample 4-2-10, cross-sectional view	160

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-97	Sample 3-2-5 (wet, new foam), cross-sectional view.	140
A1-98	Sample 3-1-9 (dry, aged foam), perspective view.	141
A1-99	Sample 3-1-9 (dry, aged foam), cross-sectional view.	141
A1-100	Perspective view of red foam specimens, subjected to brief flame impingement from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively .	142
A1-101	Sample 3-1-11, perspective view	143
A1-102	Sample 3-1-11, cross-sectional view	143
A1-103	Sample 3-2-10, perspective view	144
A1-104	Sample 3-2-10, cross-sectional view	144
A1-105	Sample 3-3-11, perspective view	145
A1-106	Sample 3-3-11, cross-sectional view	145
A1-107	Perspective view of yellow foam specimens, subjected to brief flame impingement from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively	146
A1-108	Sample 3-1-15, perspective view	147
A1-109	Sample 3-1-15, cross-sectional view	147
A1-110	Sample 3-2-15, perspective view	148
A1-111	Sample 3-2-15, cross-sectional view	148
A1-112	Sample 3-3-15, perspective view	149
A1-113	Sample 3-3-15, cross-sectional view	149
A1-114	Cross-sectional view of blue, red, and yellow foam specimens, subjected to sustained burning by bottom ignition while in horizontal position.	151

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-78	Sample 6-1-4 (aged foam), cross-sectional view. .	129
A1-79	Perspective view of red foam specimens, subjected to radiant heat exposure for 10, 20, and 30 seconds, respectively.	130
A1-80	Sample 6-1-8, perspective view.	131
A1-81	Sample 6-1-8, cross-sectional view.	131
A1-82	Sample 6-2-7, perspective view.	132
A1-83	Sample 6-2-7, cross-sectional view.	132
A1-84	Sample 6-3-7, perspective view.	133
A1-85	Sample 6-3-7, cross-sectional view.	133
A1-86	Cross-sectional view of blue, red, and yellow foam specimens, subjected to brief flame impingement at the bottom while in horizontal position .	135
A1-87	Perspective view of blue foam specimens, subjected to brief flame impingement from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively.	135
A1-88	Sample 3-1-1, perspective view.	136
A1-89	Sample 3-1-1, cross-sectional view.	136
A1-90	Sample 3-2-3, perspective view.	137
A1-91	Sample 3-2-3, cross-sectional view.	137
A1-92	Sample 3-3-1, perspective view.	138
A1-93	Sample 3-3-1, cross-sectional view.	138
A1-94	Sample 3-1-4 (wet, new foam), perspective view. .	139
A1-95	Sample 3-1-4 (wet, new foam), cross-sectional view.	139
A1-96	Sample 3-2-5 (wet, new foam), perspective view. .	140

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-57	Sample 5-2-1, cross-sectional view.	117
A1-58	Sample 5-3-2, perspective view.	118
A1-59	Sample 5-3-2, cross-sectional view.	118
A1-60	Sample 5-3-7 (aged foam), perspective view. . . .	119
A1-61	Sample 5-3-7 (aged foam), cross-sectional view. .	119
A1-62	Perspective view of red foam specimens, subjected to hot air impingement for ~2, ~3.5, and ~5 seconds, respectively	120
A1-63	Sample 5-1-12, perspective view	121
A1-64	Sample 5-1-12, cross-sectional view	121
A1-65	Sample 5-2-10, perspective view	122
A1-66	Sample 5-2-11, cross-sectional view	122
A1-67	Sample 5-3-10, perspective view	123
A1-68	Sample 5-3-10, cross-sectional view	123
A1-69	Cross-sectional view of blue and red foam specimens, subjected to radiant heat exposure for 10, 20, and 30 seconds, respectively.	125
A1-70	Perspective view of blue foam specimens, sub- jected to radiant heat exposure for 10, 20, and 30 seconds, respectively.	125
A1-71	Sample 6-1-3, perspective view.	126
A1-72	Sample 6-1-3, cross-sectional view.	126
A1-73	Sample 6-2-3, perspective view.	127
A1-74	Sample 6-2-3, cross-sectional view.	127
A1-75	Sample 6-3-2, perspective view.	128
A1-76	Sample 6-3-2, cross-sectional view.	128
A1-77	Sample 6-1-4 (aged foam), perspective view. . . .	129

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-38	Sample 7-1-5, cross-sectional view.	105
A1-39	Sample 7-3-5, cross-sectional view.	105
A1-40	Sample 7-5-5, cross-sectional view.	106
A1-41	Specimens of yellow foam, subjected to 40-200 hours of simulated sunlight exposure.	107
A1-42	Cross-sectional view of yellow foam specimens, subjected to 40, 120, and 200 hours of simu- lated sunlight exposure	107
A1-43	Sample 7-1-7, cross-sectional view.	108
A1-44	Sample 7-3-7, cross-sectional view.	109
A1-45	Sample 7-5-7, cross-sectional view.	109
A1-46	Specimens of blue foam, cut along the upper sur- face at 10, 5, and 2.5 ft/min, respectively . . .	111
A1-47	Sample 2-3-1, perspective view.	111
A1-48	Specimens of red foam, cut along the upper sur- face at 10, 5, and 2.5 ft/min, respectively . . .	112
A1-49	Sample 2-3-2, perspective view.	112
A1-50	Specimens of yellow foam, cut along the upper sur- face at 10, 5, 2.5 ft/min, respectively	113
A1-51	Sample 2-3-3, perspective view.	113
A1-52	Cross-sectional view of blue and red foam specimens, subjected to hot air impinge- ment for five seconds	115
A1-53	Perspective view of blue foam specimens, sub- jected to hot air impingement for ~2, ~3.5, and ~5 seconds, respectively.	115
A1-54	Sample 5-1-1, perspective view.	116
A1-55	Sample 5-1-1, cross-sectional view.	116
A1-56	Sample 5-2-1, perspective view.	117

LIST OF FIGURES (continued)

<u>Number</u>		<u>Page</u>
A1-21	Specimens of blue foam, subjected to accelerated aging in JP-5 at 200°F (93°C) for one to five weeks	93
A1-22	Sample 9-5-1, perspective view.	94
A1-23	Sample 9-5-1, cross-sectional view.	94
A1-24	Specimens of red foam, subjected to accelerated aging in JP-5 at 200°F (93°C) for one to five weeks	95
A1-25	Sample 9-5-5, perspective view.	96
A1-26	Sample 9-5-5, cross-sectional view.	96
A1-27	Specimen of yellow foam, subjected to accelerated aging in JP-5 at 200°F (93°C) for one to five weeks	97
A1-28	Sample 9-5-7, perspective view.	98
A1-29	Sample 9-5-7, cross-sectional view.	98
A1-30	Cross-sectional view of blue, red, and yellow foam specimens, subjected to 200 hours of simulated sunlight exposure	100
A1-31	Specimens of blue foam, subjected to 40-200 hours of simulated sunlight exposure.	101
A1-32	Cross-sectional view of blue foam specimens, subjected to 40, 120, and 200 hours of simulated sunlight exposure	101
A1-33	Sample 7-1-1, cross-sectional view.	102
A1-34	Sample 7-3-1, cross-sectional view.	102
A1-35	Sample 7-5-1, cross-sectional view.	103
A1-36	Specimens of red foam, subjected to 40-200 hours of simulated sunlight exposure.	104
A1-37	Cross-sectional view of red foam specimens, subjected to 40, 120, and 200 hours of simulated sunlight exposure	104

1. INTRODUCTION

Incidents have occurred with A-10 and other aircraft in which it appeared during subsequent investigations that heat or flame exposure of the polyurethane foam had taken place. The purpose for the use of that foam is to stop or reduce flame propagation in aircraft fuel tanks.

Specimens of the blue foam (Scott Safety Foam SF 0025, MIL-B-83054B, Type V), removed from A-10 aircraft at Glen Martin AFB, Baltimore, MD, were received for examination. Answers were sought to the following questions:

- (1) What had been the heat or fire exposure history of the specimens?
- (2) Had the fuel tank foam been immersed in fuel after the heat or fire exposure?

Wipings were also received from the vent mast area and from the right side vent tank dome of one aircraft. The compositions of these wipings were of interest. More specifically, these wipings were to be examined and analyzed for polyurethane degradation products and metal-containing substances.

To establish heat and fire exposure history of the recovered specimens, samples of unused blue foam were exposed to a hot air stream, radiant heat, and flame. The physical appearances of the incident specimens were examined with reference to controlled exposure samples. These examinations revealed that the physical appearance of foam specimens after exposure was very informative regarding past history. More extensive controlled exposure tests were subsequently performed. They encompassed all conceivable types of environmental and unwanted exposure. They included accelerated aging in air and in jet fuel (JP-5), and exposure to

ultraviolet radiation. The red and the yellow polyester-based polyurethane foams (MIL-B-83054B, Types II and III) were also incorporated into the testing program.

The physical appearance of control test specimens was thoroughly documented photographically. That record, incorporated into the present report, will be of assistance to accident investigations in future aircraft incident cases.

Thermogravimetric analyses of the blue foam were performed in air and inert atmospheres, to establish its thermal and thermo-oxidative degradation characteristics under controlled conditions.

Preparative, controlled degradation experiments were subsequently performed with the blue foam in air and in inert atmosphere. The purpose of these experiments was to obtain degradation products formed under the selected conditions, characterize these, and compare them with specimens obtained from incident sites.

Infrared reflectance spectroscopic measurements were performed with the objective of determining if these could be utilized for distinguishing between heat and fire exposure.

Surface analyses were performed with a foam specimen from an A-10 fuel vent tank, that was coated with a white, powdered solid.

The results of the outlined simulation experiments, examinations, and analyses, and the conclusions are presented in this report.

Comprehensive photographic documentation of samples from accelerated aging and incident simulation experiments is presented in Appendix 1 of this report.

Appended to this volume of the report are two memoranda (Appendices 2 and 3) in which changes of appearance and physical properties of polyurethane foam are described. These foams had been in service in A-10 and F-4 aircraft fuel systems. Changes that had occurred during the service life were noticed during aircraft fuel system maintenance operations. The reasons for the observed changes in appearance were partially elucidated; they are summarized in the memoranda.

2. EXPERIMENTAL

2.1 FOAM SAMPLES

Samples of blue, red, and yellow, reticulated polyurethane foam were received from the Fire Protection Branch, AFWAL/POSH, in the form of 12 in. x 12 in. x 1-2/3 to 2 in. slabs. The densities of the received materials ranged from 1.25 to 1.28 lb/cu ft. The foam samples used in the present work had been produced by the SCOTFOAM Corporation.

Specimens of varying sizes were cut with a band saw from the slabs for different incident-simulative tests. The sizes of specimens used are indicated in tables in which also the exposure test plans and sample codes are presented.

In previous programs, hydrolytic stability tests had been performed with the coarse pore blue and yellow, and the fine pore red foams at the University of Dayton Research Institute. The results of these tests were used as qualification test data (Ref. 1 and 2). Graphs, depicting the results of hydrolytic stability tests, are included for reference as Appendix 4 in this report.

Laboratory-scale, controlled degradation experiments were performed with samples of the blue, reticulated foam, designated Scott Safety Foam SF 0025, Type V, fine pore. For use in aircraft fuel systems, it is required to meet Military Specification MIL-B-83054B. The chemical structure of this foam was made available (Ref. 3) by SCOTFOAM Corporation for the purpose of the present work. In chemical terms, the blue foam is polyether-based, whereas the yellow and red foams are polyester-based.

In addition to previously unused foam, sixteen aircraft incident-related specimens were received from Messrs. R. Clodfelter, G. Gandee, and T. Hogan, AFWAL/POSH. These specimens originated

from several A-10 aircrafts at Glen Martin AFB, Baltimore, MD. They are listed below.

<u>Number</u>	<u>Specimen</u>
1	Fuel vent tank filler, left half, A/C 78-717 (see Figure 28, p. 58)
2	Fuel vent tank filler, right half, A/C 78-717 (see Figure 29, p. 58)
3	Fuel vent tank filler, left half, A/C 78-704 (see Figure 30, p. 59)
4	Wing tank filler, A/C 78-717 (see Figure 35, p. 64)
5-8	Foam pieces, from wing tank, A/C 78-717 (see Figure 38, p. 67)
9	Aft tank vent foam sample, A/C 78-717
10	Aft main filler cap foam sample, A/C 78-717
11	Wipings from vent mast on gauze, A/C 78-704
12	Wipings from vent mast on gauze, A/C 79-088
13	Wipings from vent mast on gauze, A/C 78-704
14	Wipings from vent mast on gauze, A/C 78-717
15	Wipings from vent mast on gauze, A/C 78-718
16	Wipings from right side vent, tank dome, A/C 78-717

2.2 EXPOSURE OF POLYURETHANE FOAMS TO AGING, SIMULATED SUNLIGHT, HEAT, AND FLAMES

2.2.1 Aging in Air

Accelerated aging experiments with foam samples in air, immersed in JP-5, and exposed to simulated sunlight radiation were performed in facilities at the University of Dayton Research Institute. A detailed report, describing the test apparatus and exposure conditions, is included in Appendix 5.

Aging tests with foam samples in air were performed at 200°F (93°C) in an atmosphere of 95% relative humidity. Test durations with groups of specimens ranged from one to five weeks, in one

week intervals. Aging of the red and yellow foam specimens was discontinued at the end of the third week because of severe degradation.

2.2.2 Aging in Jet Fuel

For these tests, foam specimens were immersed in JP-5, contained in widemouth, sealed, one quart glass jars. The samples were heated in an air oven at 200°F (93°C) for periods ranging from one to five weeks, in one week intervals.

2.2.3 Simulated Sunlight Exposure

Simulated sunlight exposure tests were performed in Sunlighter IV test chamber (Ref. 4). Samples were supported by a rotating shelf. Exposure times with groups of samples ranged from 40 to 200 hours, in 40-hour increments.

2.2.4 Hot Wire Cutting

Hot wire cutting of foam was performed by the SCOTFOAM Corporation. Electrically resistance-heated wire was used for cutting. Foam slabs were passed past the wire at the following speeds: 10 ft/min, 5 ft/min, and 2.5 ft/min. The first of these speeds is the normally used cutting speed. Thermal degradation of foam occurs when hot wire cutting is performed. As the speed of cutting is decreased, the amount of damage inflicted on the foam surface is increased.

2.2.5 Hot Air Impingement

A stream of hot air, produced by a heat gun, was directed onto the top surface of foam specimens. Air temperature ranged up to 870°F (466°C). The air flow rate was approximately 10 cu ft/min. Exposure times ranged from 2 to 5 sec. These tests were performed in a well-ventilated hood.

2.2.6 Radiant Heat Exposure

Samples were held horizontally above the graphite bar of the 3000°F (1649°C) ignition test apparatus (Ref. 5) at the distance of 2 in. (5.1 cm). The resistance-heated graphite bar served as the heat source for irradiative and convective heating of foam specimens. The exposure times were 10, 15, and 20 seconds, respectively, for the three groups of test specimens.

2.2.7 Brief Flame Impingement

A glassblowing torch, operated with propane and oxygen input, was used as the flame source. The flame length was approximately ten inches (25.4 cm); the maximum flame temperature was 1560°F (849°C).

In brief flame impingement tests, the flame was traversed across the surface of foam specimens. The exposure times ranged up to two seconds. In these tests, the torch was traversed over the surface at a sufficiently rapid rate to prevent ignition of foam specimens.

2.2.8 Sustained Burning

Foam samples were ignited by means of the torch described in the preceding section. Samples in the three groups were allowed to burn for progressively longer periods of time, extending up to about five seconds.

2.2.9 Flash Fire

These tests were designed to simulate damage caused to foam during aircraft fuel tank fire. Flash fire exposure tests with foam were performed with the flame tube (Ref. 6) at the Aero Propulsion Laboratory (see Figure 1). The foam was packed into the flame tube with two void configurations of 10 percent by volume each,

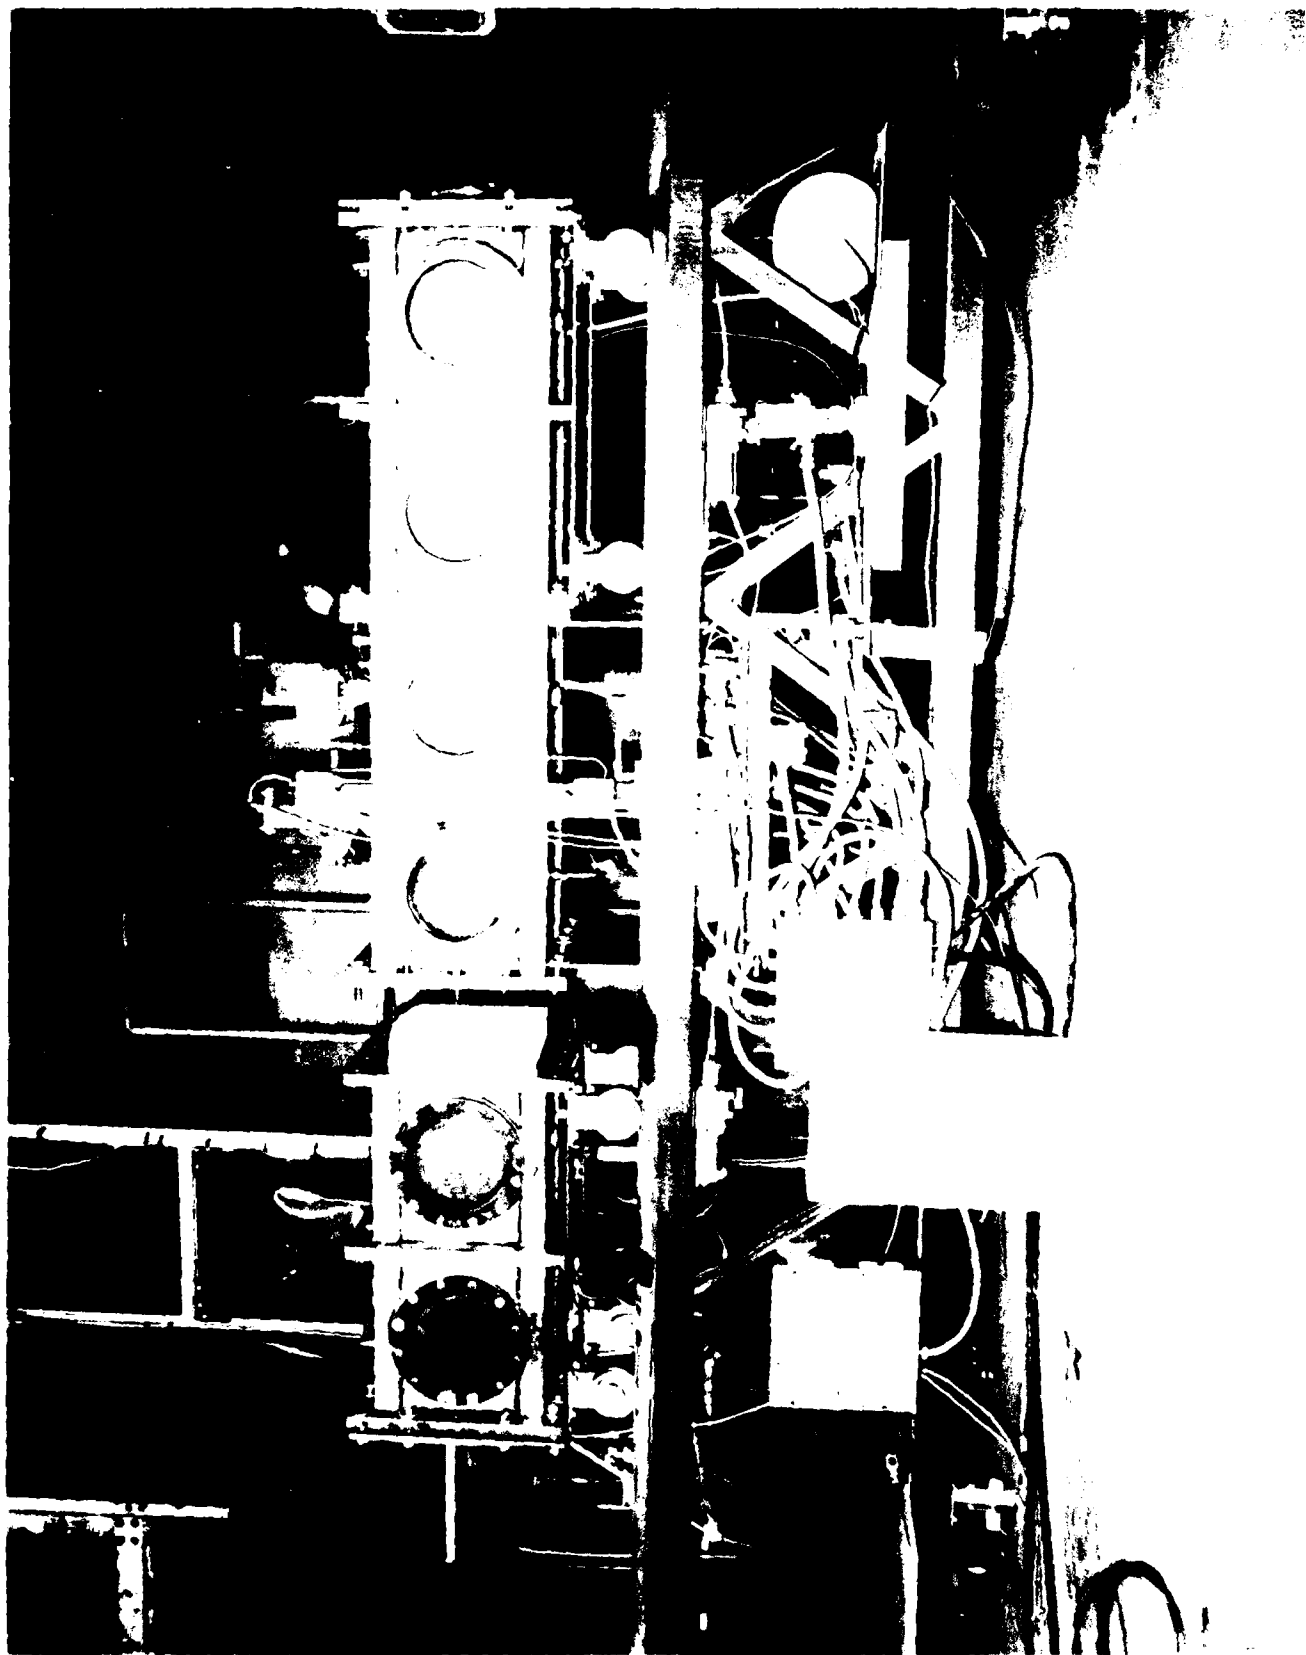


Figure 1. Flash fire test system.

as shown in Figure 2. Figure 3 depicts the corresponding configuration for the vented tests. The initial conditions were selected to simulate actual operating conditions, and conditions that could be encountered in a worst case situation. Experiments were conducted with combinations of the following parameters:

1. Foam type (blue, red, and yellow)
2. Propane concentration in air (3.5%, 5%, and 6.5% by volume)
3. Non-venting and venting of the chamber
4. Dry and JP-5 fuel-wetted foam
5. Initial pressures of 0 psig and 3 psig (17.7 psia)

The flame tube is of reinforced steel construction, with a square cross section [12 in. x 12 in x 90 in. (30.5 cm x 30.5 cm x 228.8 cm)]. Void spaces were enclosed along all walls by 2 inches (5.1 cm) thick slabs of reticulated foam, except for the wall where the igniter was located. The test assembly can be evacuated and subsequently filled with a gas mixture of desired, ignitable composition. Propane-air mixtures were used for these experiments. The gaseous mixtures were ignited by an electrical spark source.

The stoichiometric mixture of propane in air contains 4.02 volume-% of fuel. It was learned in experiments that the highest overpressure in the flame tube was developed at 5 volume-% propane concentration. Therefore, the latter fuel concentration was used in many experiments. To evaluate the effect of lean and rich fuel-air mixtures of foam damage, 3.5 and 6.5 volume-% propane in air mixtures were also used. Combinations of the above three fuel-air mixtures, with controlled variations of other parameters, were used.

The effect of foam wetting was investigated by performing tests with dry foam, and also with foam wetted by JP-5 fuel. After the test series with dry foam had been completed, JP-5 fuel-wetted

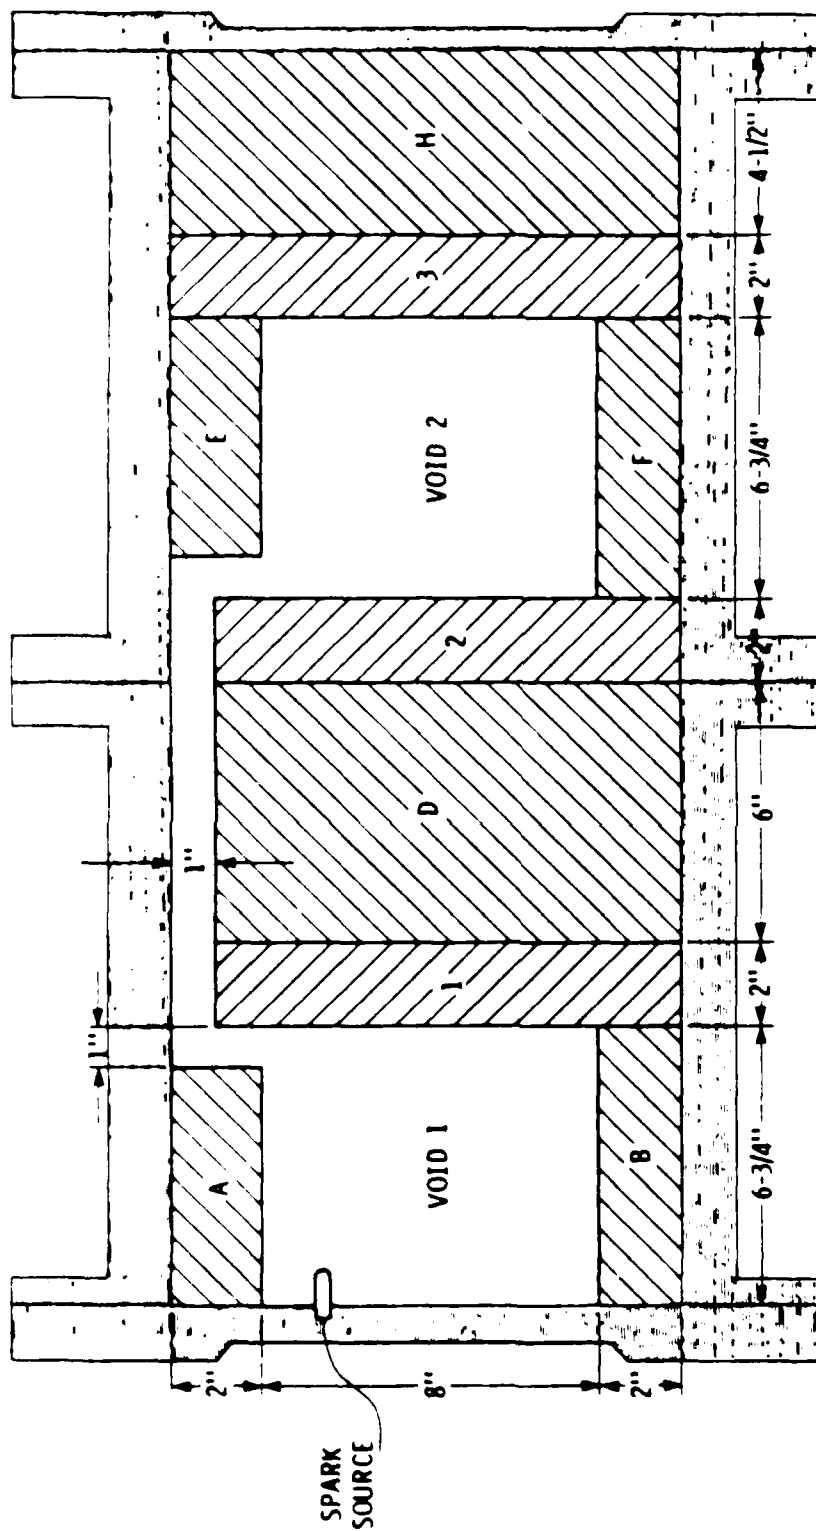


Figure 2. Cross-sectional view of flame tube in unvented configuration. (Dashed areas represent polyurethane foam. The opening between Voids 1 and 2 was 1 in. wide.)

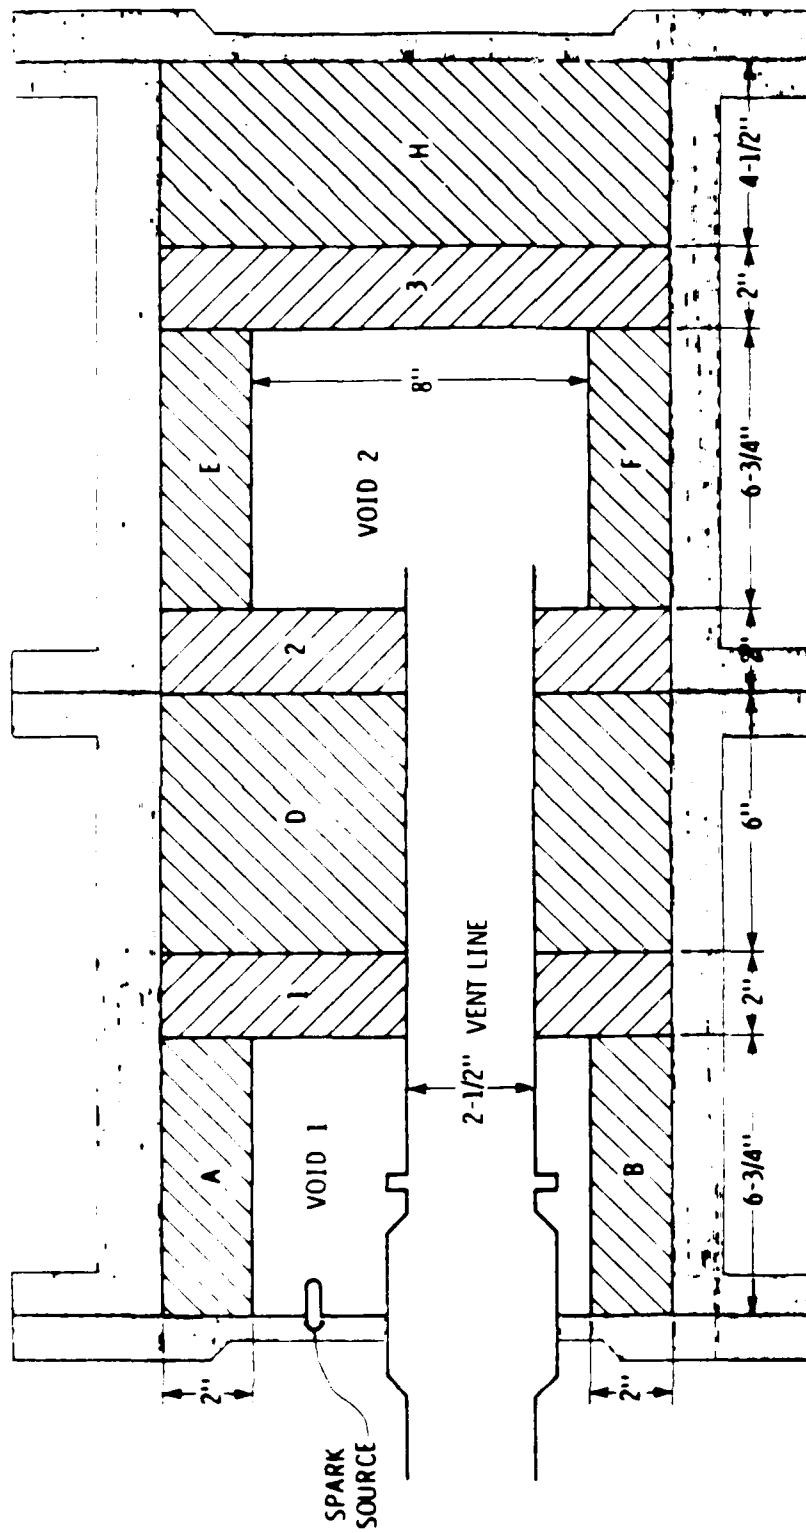


Figure 3. Cross-sectional view of flame tube in vented configuration.
(Dashed areas represent polyurethane foam.)

foam was substituted. It was found that in experiments performed with the unvented system, the fuel raised the hydrocarbon vapor content to such an extent that ignition did not occur at the 6.5 volume-% propane concentration. Therefore, experiments with fuel-wetted foam in the unvented system were performed with 2.0, 3.5, and 5.0 volume-% propane mixtures in air.

The entire series of tests was first performed with closed flame tube assembly (see Figure 1) in an unvented manner. The tests were subsequently repeated in a vented manner with a 2-1/2 in. diameter A-10 vent line installed (see Figure 3) into the system. The vent line increased the void volume by two percent.

Internal system pressures were monitored continuously and maximum pressures were noted. Overpressures were calculated as the differences between the maximum and initial pressures.

To conduct the tests in the vented configuration, the vent line was capped with a flat aluminum plate and the flame tube was evacuated. A premixed propane and air mixture was then introduced into the tube. The plate fell off the vent line when the mixture inside the tube approached atmospheric pressure. The mixture was then immediately ignited to prevent circulation of the propane-air mixture with air outside the flame tube. With fuel-wetted foam in the open vent configuration, it was necessary to extinguish the flame by capping the vent. This was done in each test approximately 30 seconds after ignition. Sustained burning does not occur in aircraft, due to increased vent line length.

2.2.10 Exposure Test Plan and Sample Code

A test plan was developed for exposure of foam samples under the different, incident-simulating exposure conditions. This plan is summarized in Tables 1 to 8. A three-number code system, X-Y-Z, was designed for identification of samples.

The first number, X, designates the test type as follows:

- (1) flash fire
- (2) hot wire cutting
- (3) brief flame impingement
- (4) sustained burning
- (5) hot air impingement
- (6) radiant heat exposure
- (7) accelerated aging in simulated sunlight
- (8) accelerated aging in air
- (9) accelerated aging in jet fuel

The second number, Y, in conjunction with the first, designates a group of tests performed under identical, specified conditions (e.g., exposure duration, temperature, cutting rate, site of ignition, etc.). It may involve several foams. However, test conditions remained identical for all samples carrying the same first two numbers.

The third number was used for sequential identification of samples. In some instances (e.g., experiments with aged foam samples), insufficient sample material was available for performing all initially planned tests. In those instances, all sequential numbers do not appear in Tables 1 to 8.

TABLE 1. HOT WIRE CUTTING. TEST PLAN
AND SAMPLE CODE

Foam	Sample size, in. ^a	Cutting speed, ft/min		
		10	5	2.5
Blue, dry, new	12x12x2	2-1-1	2-2-1	2-3-1
Red, dry, new	12x12x2	2-1-2	2-2-2	2-3-2
Yellow, dry, new	12x12x2	2-1-3	2-2-3	2-3-3

^aSize after hot wire cutting.

TABLE 2. BRIEF FLAME IMPINGEMENT. EXPOSURE
TEST PLAN AND SAMPLE CODE

Foam	Sample size, in.	Horizontal, top ignition	Vertical, bottom ignition	Horizontal, bottom ignition
Blue, dry, new	6x6x2	3-1-1	3-2-1	3-3-1
	6x6x2	3-1-2	3-2-2	3-3-2
	6x6x2	3-1-3	3-2-3	3-3-3
Blue, wet, new	6x6x2	3-1-4	3-2-4	
	6x6x2	3-1-5	3-2-5	
Blue, dry, aged	3x3x2	3-1-9		
Red, dry, new	6x6x2	3-1-10	3-2-10	3-3-10
	6x6x2	3-1-11	3-2-11	3-3-11
	6x6x2	3-1-12	3-2-12	3-3-12
Yellow, dry, new	6x6x2	3-1-13	3-2-13	3-3-13
	6x6x2	3-1-14	3-2-14	3-3-14
	6x6x2	3-1-15	3-2-15	3-3-15

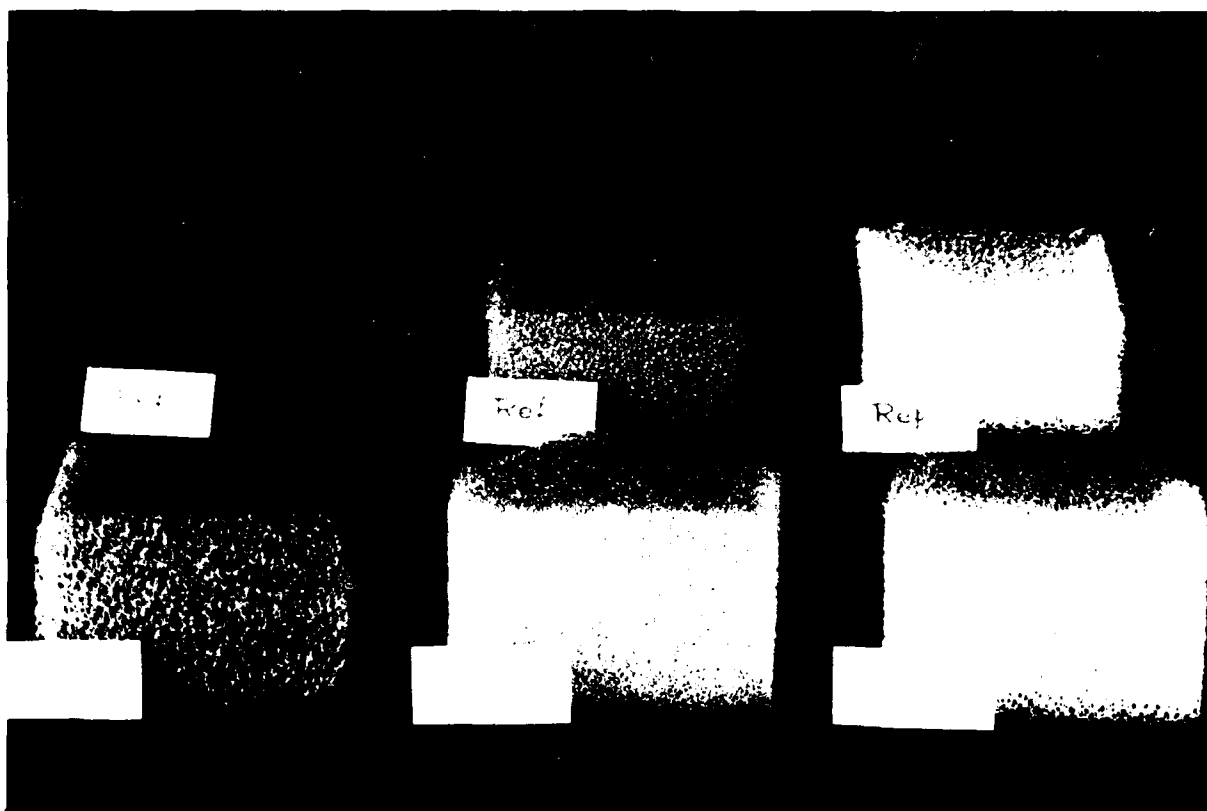


Figure 8. Cross-sectional views of foam specimens subjected to accelerated aging in jet fuel (JP-5).



Figure 6. Red foam specimen, after three weeks of accelerated aging in air.

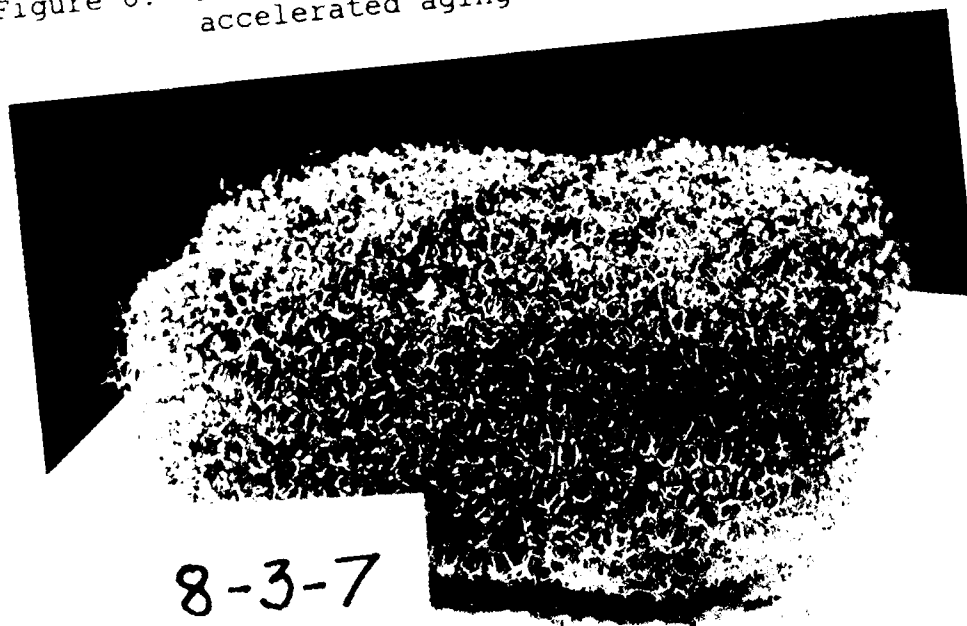


Figure 7. Yellow foam specimen, after three weeks of accelerated aging in air.

The blue foam acquires grayish appearance and discolors upon aging. The red foam becomes brownish-red, and the yellow foam becomes brown as the exposure progresses.

The appearances of the red and yellow specimens after three weeks of exposure in the 200°F (93°C) test chamber are depicted in Figures 6 and 7, respectively.

3.1.2 Aging in Jet Fuel

When the foam specimens were subjected to aging in liquid JP-5 environment, their appearance changed similarly to samples aged in air. Darkening occurred uniformly throughout the samples. However, the discoloration was less extensive (see Figure 8) than in tests performed in humid air. This was especially noticeable with red- and yellow-colored samples.

These tests were performed with samples immersed in JP-5, contained in sealed jars. The rounding of sample edges was caused by the confining containers. The discoloration of samples aged in fuel was partly caused by black pigment leached from sample labels that had been made with a DYMO tapewriter. Disintegration of specimens did not occur in tests performed in JP-5.

The results of tests described here parallel those made earlier at the University of Dayton Research Institute (Refs. 1, 2 and Appendix 4). Very limited foam degradation occurs in fuel aging tests due to the absence of moisture in the fuel. A plot of tensile strength as a function of time is shown in Appendix 4.

3.1.3 Simulated Sunlight Exposure

Ultraviolet light emitted by the light source used in present work is presumed to have caused most of the discoloration of all three reticulated foams. In contrast to heat-induced damage caused by

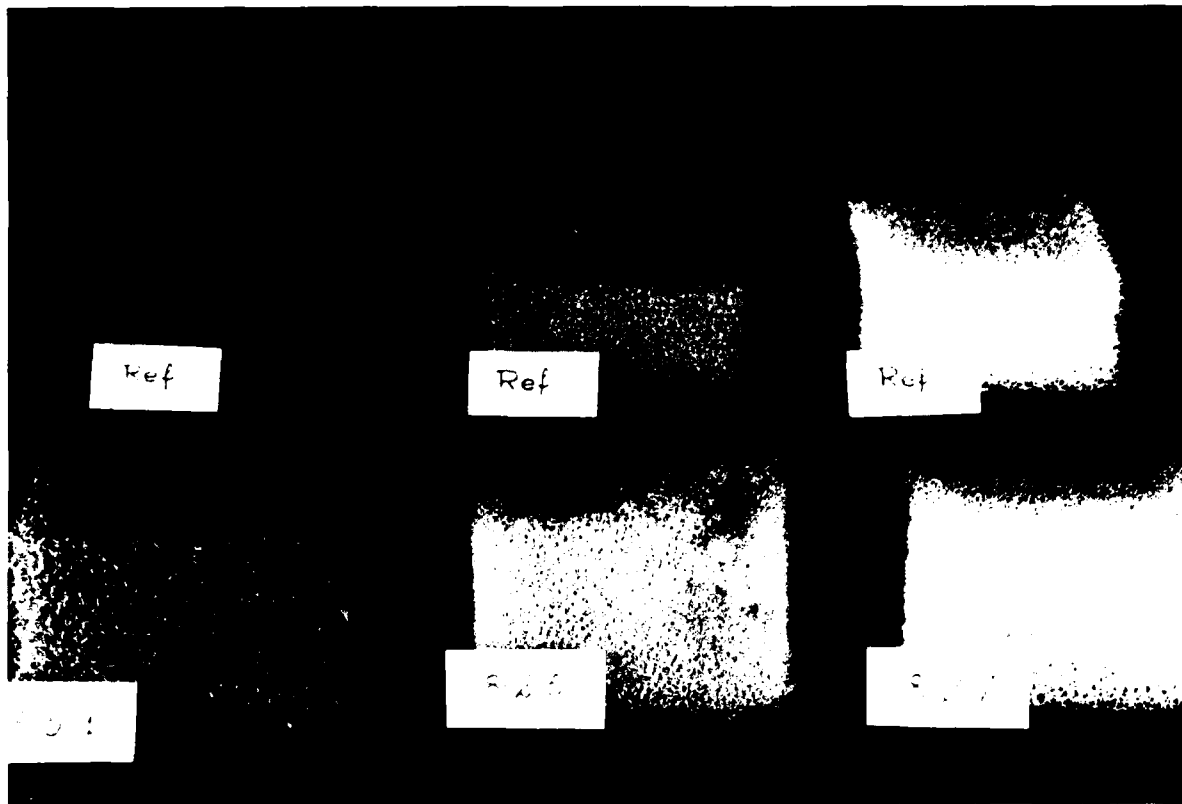


Figure 5. Cross-sectional views of foam specimens subjected to accelerated aging in air (8-5-1, five weeks; 8-2-5, two weeks; 8-2-7, two weeks).

3. RESULTS AND DISCUSSION

3.1 EXPOSURE OF POLYURETHANE FOAMS TO AGING, SIMULATED SUNLIGHT, HEAT, AND FLAMES

3.1.1 Aging in Air

Polyurethane foams are known to be subject to thermal, hydrolytic, and irradiative degradation (Refs. 1, 2, 7). Samples that would display the physical effects of chemical changes and breakdown were needed for photographic recording. For that purpose, accelerated heat and irradiation exposure tests were performed under conditions more severe than those to which the foams would become subjected in normal service.

Aging tests with foam samples in air and in jet fuel (JP-5) were performed at 200°F (93°C). The polyester-based (red and yellow) foams degraded rapidly in air of 95% relative humidity. During the third week of the five-week test period, these two foams disintegrated physically and the samples were withdrawn from tests. These observations are in accord with previous aging test results in which tensile strengths of samples were determined as functions of exposure time (Refs. 1, 2; see also Appendix 4 for graphs from these references). The degradation of polyester-based foams has been attributed to hydrolysis of the polymeric chains (Ref. 8). The polyol-based (blue) polyurethane foam samples retained their physical integrity during the 5-week test period.

A visually readily detectable feature of foam aging is uniform discoloration throughout the specimen. In Figure 5 are shown cross-sectional views of blue, red and yellow foam specimens that had been subjected to accelerated aging in air for five, two, and two weeks, respectively. Unaged reference samples are shown for comparison in the same figure.

The surface analyses were performed at the University of Dayton Research Institute. A copy of the report covering this work is included as Appendix 7. Results are presented in Section 3.4.5.

damaged and burned foam were found to differ from that of the undegraded foam mainly by very significant reduction of urethane functionality (NH bend $\sim 1532\text{ cm}^{-1}$), and increase of C-O-C functionality (C-O-C stretch $\sim 1100\text{ cm}^{-1}$) at the degraded surface. However, no significant differences were detected between the spectra of foams damaged by hot air and by burning.

2.4.3 Emission Spectroscopic Analysis

In search of metallic contaminants, that could be of assistance in tracing incident scenarios, emission spectrographic analyses were performed. The materials subjected to these analyses included foam from vent tank, with a white deposit on its surface, and wipings from vent masts and vent tank. The emission spectrographic analyses were performed by Bowser-Morner Testing Laboratories, Inc. The report covering this work is included as Appendix 6. Results are summarized in Section 3.4.4.

2.4.4 Surface Analysis

After detection of metallic contaminants in the foam sample from the incident site, using emission spectroscopic analysis, efforts were pursued to establish the distribution of metals in the specimen. Surface analysis techniques were used for this purpose.

Scanning electron microscopy was utilized to determine the physical appearance of particles that constituted the white coating on the foam surface. Energy-dispersive x-ray analysis (EDXA) revealed the presence of potassium as the major metallic constituent in the surface deposit. Carbonate ion was identified as the major anionic species in the surface deposit by x-ray photoelectron spectroscopy.

Figure 4. Sample of the tan-colored solid formed upon pyrolysis of blue foam.

2.4.2 Infrared Reflectance Spectroscopic Analysis

The utility of infrared reflectance spectra of foam specimens for determining if an affected surface had been exposed to intense heat, or had been involved in fire, was explored. A Digilab Model 15B Fourier Transform Infrared Spectrometer, in conjunction with an attenuated total reflectance (ATR) measurement cell, was utilized for these measurements.

The ATR spectrum of the baseline, undegraded polyurethane foam sample was compared with the spectra of samples whose surfaces had been degraded by hot air and by burning. The spectra of hot air

TABLE 9. PYROLYSIS AND THERMO-OXIDATIVE DEGRADATION EXPERIMENTS
WITH BLUE POLYURETHANE FOAM UNDER CONTROLLED CONDITIONS

	Experiment		
	1	2	3
Weight of foam sample, g	3.7	5.2	4.2
Atmosphere ^a	Nitrogen	Air	Air
Temperature at which initial discoloration observed ^b , °C	260		200
Total heating time, min ^b	95	9 ^c	105
Maximum temperature, °C	450	430	450
Weight of isolated solids, g	1.92	1.48	0.76
Appearance of isolated solids	Tan	Tan to black ^d	Black, charred
Weight of isolated liquids	0.36	1.60	1.94
Appearance of isolated liquids	Orange-brown	Red-brown	Dark brown, viscous, contains some water

^aThe rate of nitrogen or air flow rate through the reaction tube was 100 cm³/min.

^bAll experiments were started with samples at room temperature.

^cThe reaction tube was introduced into tube furnace that had been preheated to 460°C.

^dThe solid that remained in the Pyrex tube (0.72 g) was black-colored. The volatilized and subsequently condensed solid was tan-colored. It contained some brown particles.

TABLE 10. ELEMENTAL ANALYSIS RESULTS

	Reference foam sample ^a	Foam degradation products		
		Exp. 1 Tan solid ^a	Exp. 2 Tan solid	Exp. 3 Black char
Elemental composition, wt-% ^b				
C	64.15	63.46	64.06	62.28
H	8.24	6.38	6.48	2.78
N	7.97	16.89	15.86	18.71
Elemental ratio				
C	18.8	8.8	9.4	7.8
H	28.7	10.5	11.4	4.1
N	2.0	2.0	2.0	2.0

^aShown in Figure 4.

^bElemental analysis data are based on duplicate determinations.

The main purpose of these experiments was to obtain degradation products of the polyurethane foam for characterization, and for comparison with wipings from aircraft that had been involved in the incidents. It was also of interest to acquire some understanding of the chemical degradation mechanism of this foam.

The experimental conditions and results are summarized in Table 9. The degradation products were recovered from the reaction tubes. Liquid products were separated from solids by extraction with methylene chloride. The solvent was removed by evaporation. The recovered, separated degradation products were analyzed spectrometrically. Also, elemental compositions of the solid materials were determined. The latter analyses were performed by Galbraith Laboratories, Inc., Knoxville, TN. These results are summarized in Table 10.

2.3.3 Infrared Spectroscopic Analysis Of Degradation Products

The infrared absorption spectra of the reference sample of unused, blue polyurethane foam, and of the degradation products, were recorded with Perkin-Elmer Model 137 Spectrometer. To obtain the spectrum of the blue foam, the sample was ground at liquid nitrogen temperature. The powdered foam was mixed with dry potassium bromide in order to pelletize the mixture.

2.4 EXAMINATION AND ANALYSIS OF POLYURETHANE SAMPLES RECOVERED FROM AIRCRAFT INCIDENT SITES

2.4.1 Visual Examination

The samples were initially examined visually with an unaided eye and also with the assistance of a magnifier. Subsequently, specific surface analysis techniques were utilized for characterization and identification purposes.

For flash fire experiments, the second number identifies the sample location in the flame tube (see Figures 2 and 3). The third code number (Z) identifies the sequential test number.

The numbers designating tests, X, were issued in sequence. They corresponded to the planned schedule in which samples from different exposure tests were expected to become available. The discussion of test methods and results in this and the next section of the report follow a different sequence. Accelerated foam aging in air, in jet fuel, and upon exposure to sunlight are discussed first. Hot wire cutting of foam is discussed next. Subsequently, simulated unwanted exposures to environments of progressively increasing severity (i.e., hot air impingement, radiant heat exposure, brief flame impingement, and sustained burning) are discussed. The results of flash fire experiments are presented last. Evidence of exposures discussed in all preceding sections could be encountered with foams that have been in flash fire environments.

2.3 LABORATORY-SCALE, CONTROLLED DEGRADATION EXPERIMENTS WITH BLUE POLYURETHANE FOAM

2.3.1 Thermogravimetric Analysis

Thermogravimetric analyses (TGA) [weight loss (%)] were performed in air and helium atmospheres at the heating rate of 10°C/min. The acquired data were also utilized to simultaneously produce the differential thermogravimetric (DTG) curves [rate of weight loss (mg/min)].

2.3.2 Pyrolysis and Thermo-oxidative Degradation of Blue Foam Under Controlled Conditions

Three preparative experiments were performed in which known masses of polyurethane foam were heated in Pyrex tubes, either in a stream of air or inert (nitrogen) gas. The products were collected on air-cooled sections of the tube and in a trap immersed in dry ice.

TABLE 7. ACCELERATED AGING IN AIR. EXPOSURE
TEST PLAN AND SAMPLE CODE

Foam	Sample size, in.	Exposure time, weeks				
		1	2	3	4	5
Blue, dry, new	3x3x2	8-1-1	8-2-1	8-3-1	8-4-1	8-5-1
	3x3x2	8-1-2	8-2-2	8-3-2	8-4-2	8-5-2
	3x3x2	8-1-3	8-2-3	8-3-3	8-4-3	8-5-3
	3x3x2	8-1-4	8-2-4	8-3-4	8-4-4	8-5-4
Red, dry, new	3x3x2	8-1-5	8-2-5	8-3-5	8-4-5	8-5-5
	3x3x2	8-1-6	8-2-6	8-3-6	8-4-6	8-5-6
Yellow, dry, new	3x3x2	8-1-7	8-2-7	8-3-7	8-4-7	8-5-7
	3x3x2	8-1-8	8-2-8	8-3-8	8-4-8	8-5-8

TABLE 8. ACCELERATED AGING IN JET FUEL. EXPOSURE
TEST PLAN AND SAMPLE CODE

Foam	Sample size, in.	Exposure time, weeks				
		1	2	3	4	5
Blue, dry, new	3x3x2	9-1-1	9-2-1	9-3-1	9-4-1	9-5-1
	3x3x2	9-1-2	9-2-2	9-3-2	9-4-2	9-5-2
	3x3x2	9-1-3	9-2-3	9-3-3	9-4-3	9-5-3
	3x3x2	9-1-4	9-2-4	9-3-4	9-4-4	9-5-4
Red, dry, new	3x3x2	9-1-5	9-2-5	9-3-5	9-4-5	9-5-5
	3x3x2	9-1-6	9-2-6	9-3-6	9-4-6	9-5-6
Yellow, dry, new	3x3x2	9-1-7	9-2-7	9-3-7	9-4-7	9-5-7
	3x3x2	9-1-8	9-2-8	9-3-8	9-4-8	9-5-8

TABLE 5. RADIANT HEAT EXPOSURE. TEST PLAN AND SAMPLE CODE

Foam	Sample size, in.	Exposure time, sec		
		10	15	20
Blue, dry, new	6x6x2	6-1-1	6-2-1	6-3-1
	6x6x2	6-1-2	6-2-2	6-3-2
	6x6x2	6-1-3	6-2-3	6-3-3
Blue, dry, aged	3x3x2	6-1-4 ^a		
Red, dry, new	6x6x2	6-1-7	6-2-7	6-3-7
	6x6x2	6-1-8	6-2-8	6-3-8
	6x6x2	6-1-9	6-2-9	6-3-9

^aThis sample had been subjected to accelerated aging in air at 200°F (93°C) for five weeks.

TABLE 6. ACCELERATED AGING IN SIMULATED SUNLIGHT. EXPOSURE TEST PLAN AND SAMPLE CODE

Foam	Sample size, in.	Exposure time, hours				
		40	80	120	160	200
Blue, dry, new	3x3x2	7-1-1	7-2-1	7-3-1	7-4-1	7-5-1
	3x3x2	7-1-2	7-2-2	7-3-2	7-4-2	7-5-2
	3x3x2	7-1-3	7-2-3	7-3-3	7-4-3	7-5-3
	3x3x2	7-1-4	7-2-4	7-3-4	7-4-4	7-5-4
Red, dry, new	3x3x2	7-1-5	7-2-5	7-3-5	7-4-5	7-5-5
	3x3x2	7-1-6	7-2-6	7-3-6	7-4-6	7-5-6
Yellow, dry, new	3x3x2	7-1-7	7-2-7	7-3-7	7-4-7	7-5-7
	3x3x2	7-1-8	7-2-8	7-3-8	7-4-8	7-5-8

TABLE 3. SUSTAINED BURNING. EXPOSURE
TEST PLAN AND SAMPLE CODE

<u>Foam</u>	<u>Sample size, in.</u>	<u>Horizontal, top ignition</u>	<u>Vertical, bottom ignition</u>	<u>Horizontal, bottom ignition</u>
Blue, dry, new	6x6x2	4-1-1	4-2-1	4-3-1
	6x6x2	4-1-2	4-2-2	4-3-2
	6x6x2	4-1-3	4-2-3	4-3-3
Blue, wet, new	6x6x2	4-1-4	4-2-4	
	6x6x2	4-1-5	4-2-5	
Blue, dry, aged	3x3x2	4-1-9		
Red, dry, new	6x6x2	4-1-10	4-2-10	4-3-10
	6x6x2	4-1-11	4-2-11	4-3-11
	6x6x2	4-1-12	4-2-12	4-3-12
Yellow, dry, new	6x6x2	4-1-13	4-2-13	4-3-13
	6x6x2	4-1-14	4-2-14	4-3-14
	6x6x2	4-1-15	4-2-15	4-3-15

TABLE 4. HOT AIR IMPINGEMENT. EXPOSURE
TEST PLAN AND SAMPLE CODE

<u>Foam</u>	<u>Sample size, in.</u>	<u>Exposure duration, sec</u>		
		<u>~2</u>	<u>~3.5</u>	<u>~5</u>
Blue, dry, new	4x4x2	5-1-1	5-2-1	5-3-1
	4x4x2	5-1-2	5-2-2	5-3-2
	4x4x2	5-1-3	5-2-3	5-3-3
Blue, dry, aged	3x3x2			5-3-7 ^a
Red, dry, new	4x4x2	5-1-10	5-2-10	5-3-10
	4x4x2	5-1-11	5-2-11	5-3-11
	4x4x2	5-1-12	5-2-12	5-3-12

^aThis sample had been subjected to accelerated aging
in air at 200°F (93°C) for five weeks.

aging in a uniformly heated space, light-induced effects are most severe at the outer surface that faces the source. The extent of damage diminishes with distance from the surface toward the interior because of absorption and scattering of radiation by the foam (see Figure 9). Damage increases with exposure time.

Reduction of foam elasticity occurs simultaneously with darkening. However, at the end of the 200-hour exposure times, all foam specimens retained some surface resilience.

The lamps used for present work simulate spectral distribution of sunlight (Ref. 4). The energy flux at the upper sample surface is approximately two hundred and forty-five times more intense than in normal daylight exposure. Two hundred hours of exposure in the test apparatus correspond approximately to 5.6 years of exposure under environmental conditions (Ref. 4).

3.1.4 Hot Wire Cutting

Cutting of foams into required shapes is sometimes done with a hot wire. No visibly detectable degradation occurs when cutting is performed at established speeds (10 ft/min). A magnified surface view of blue foam is presented in Figure 10. At reduced cutting speeds (e.g., in sharp corner cuts), some localized foam degradation occurs only at the cutting surface. With blue foam, this effect is physically evidenced by change of color to a shade of green or brown, depending upon the extent of degradation.

The appearances of foam surfaces formed by cutting at normal and subnormal speeds are depicted in photographs included in Appendix 1 of this report.

3.1.5 Hot Air Flow

The effects of hot air impingement onto blue and red foam samples are shown in cross-sectional views in Figure 11. Melting,

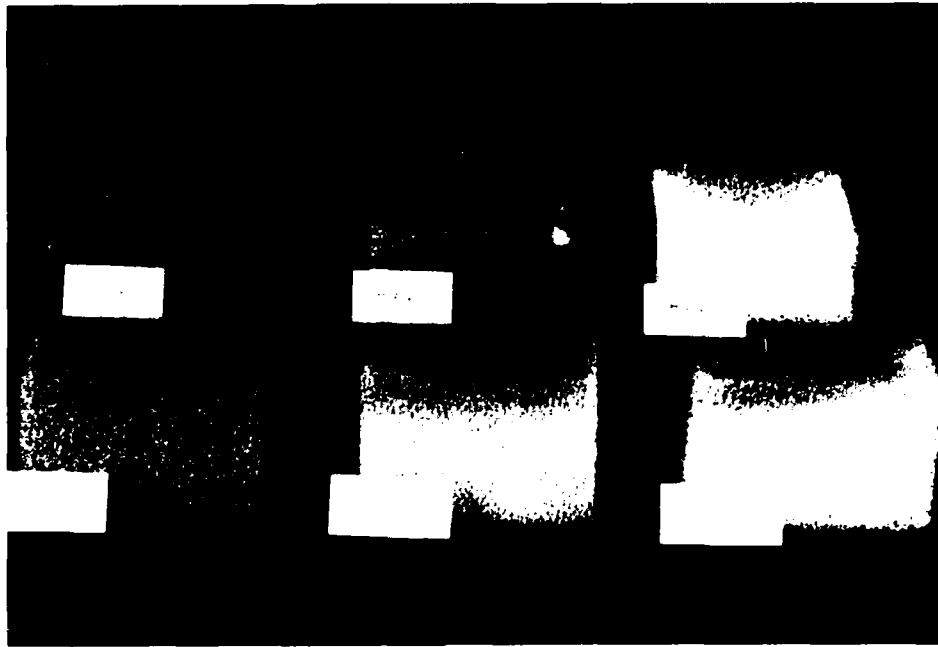


Figure 9. Cross-sectional views of foam specimens subjected to 200 hours of simulated sunlight exposure.

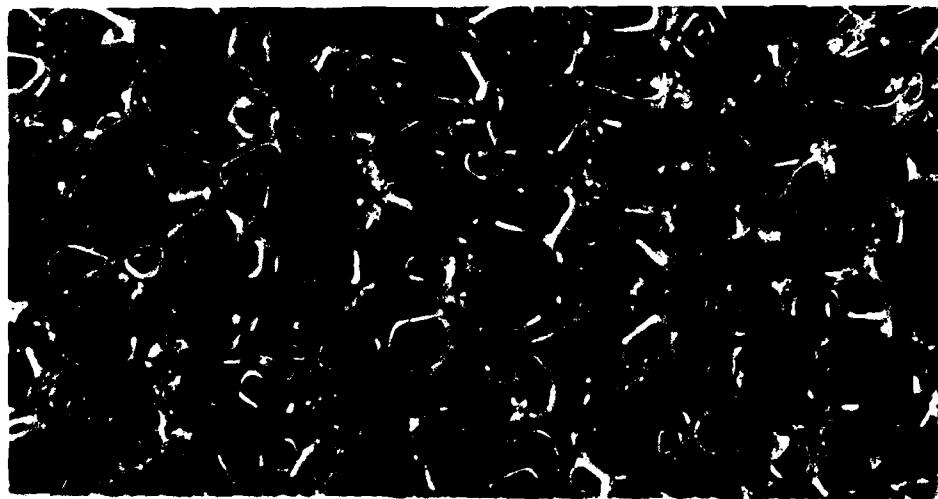


Figure 10. Magnified view of hot-wire-cut blue foam surface. (Each scale division corresponds to 1/16 in.).

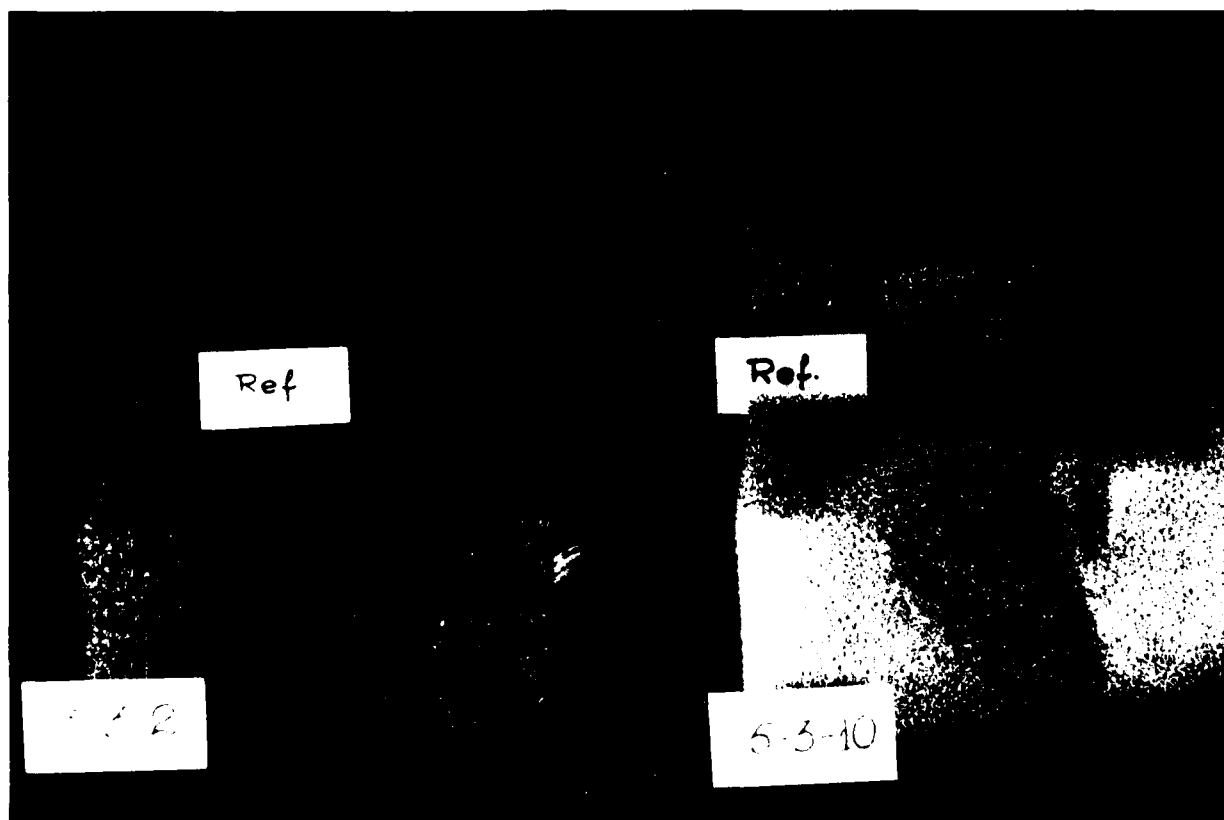


Figure 11. Cross-sectional views of foam specimens subjected to hot air impingement.

degradation, discoloration, and sample surface recession occurred at the site of hot air stream impingement. Since the foams are of open pore type, hot air flowed into the foam structure. This resulted in partial degradation and discoloration of the foam, without significant change of physical structure, below the shrunken and degraded mass at the surface. The depth of the discolored zone increased with progressive exposure to the hot air stream, extending to more than 1 in. (2.5 cm).

Upon closer inspection, molten and subsequently solidified droplets of polymer mass can be observed on the walls of the recession (see Figure 12).

Samples of blue foam that had been subjected to accelerated aging at 200°F (93°C) for five weeks were also used for hot air impingement tests. These samples responded qualitatively very similarly to unaged foam.

It should be noted that the most characteristic feature of foams exposed to hot air flow is a deep, discolored, but otherwise physically unaltered zone of material.

3.1.6 Radiant Heat Flux

Foam samples subjected to irradiative and convective heating, by a resistance-heated graphite element, exhibited surface-degradation. Additionally, some discoloration was observed below the surface at which the degradation products formed droplets of liquid matter that subsequently solidified (see Figure 13). The depth of the discolored zone, with reference to the degraded zone depth, was much shallower than in experiments in which a hot air stream impinged onto foam specimens.

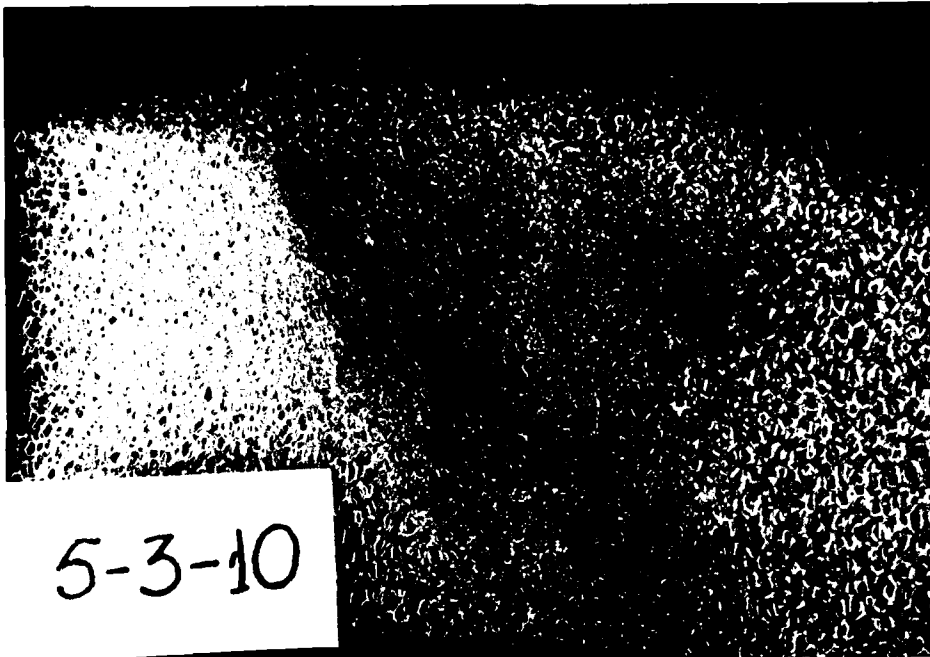


Figure 12. Cross-sectional close-up view of red foam specimen subjected to hot air impingement.

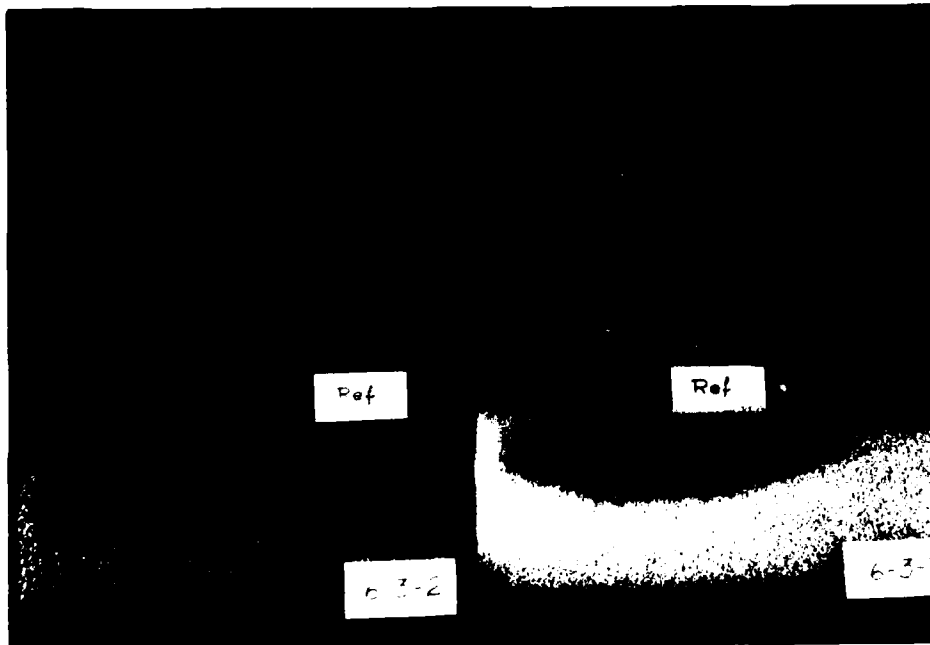


Figure 13. Cross-sectional views of foam specimens subjected to radiant heating.

3.1.7 Brief Flame Impingement

For this sequence of simulative experiments, flame impingement was of such short duration that foam ignition did not occur. Degradation and darkening were limited to sample surface; no damage was affected below the surface (see Figure 14). The strands of reticulated foam were darkened in the impingement area; in some instances, dark beads, composed of partially degraded polymeric material, were formed at the surface.

3.1.8 Sustained Burning

In this sequence of experiments, samples were subjected to flame impingement from a propane torch until ignition occurred. Subsequently, they were allowed to burn without support from the external flame. Experiments were performed with dry foam specimens, and also with those that had been soaked in JP-4.

With dry foam specimens, flames propagated rapidly along the surface. Flame propagation was particularly rapid when vertically held samples were ignited close to the bottom edge. The very limited foam damage below the burn zone (see Figures 15 and 16) was quite unexpected. Apparently, the expanding air below the burn zone hinders diffusion of hot gases into the samples and thereby limits degradative damage.

Intense flames spread very rapidly across entire blue foam specimens that had been soaked in JP-5. During the initial burning phase, the fuel was the major combustible component. Severe darkening of foam surface was observed already during the initial burning (see Figure 17). The discoloration of foam below the combustion zone was slightly more noticeable with fuel-soaked samples, than with dry specimens (compare Figures 15 and 17). More discoloration below the flame zone occurred with fuel-soaked samples during vertical burning than in the course of horizontal top surface burning (compare Figures 17 and 18).

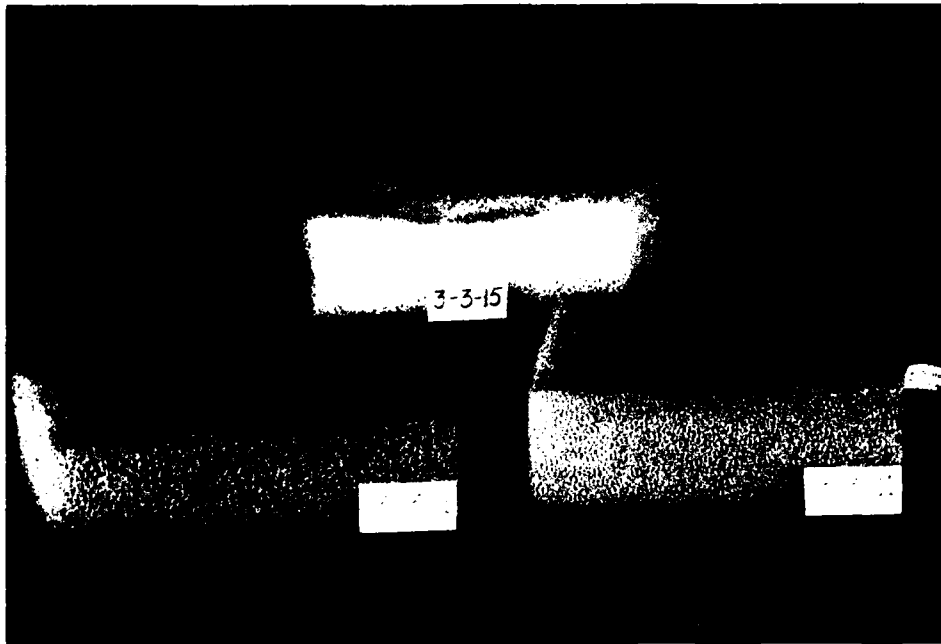


Figure 14. Cross-sectional views of foam specimens subjected to brief flame impingement.

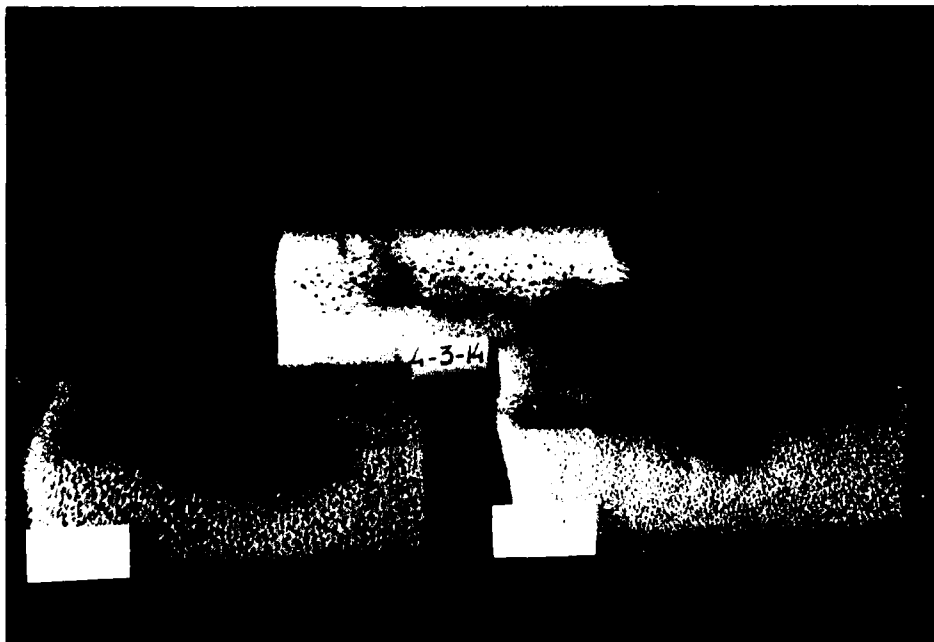


Figure 15. Cross-sectional views of specimens that had been involved in sustained top surface burning in horizontal position.

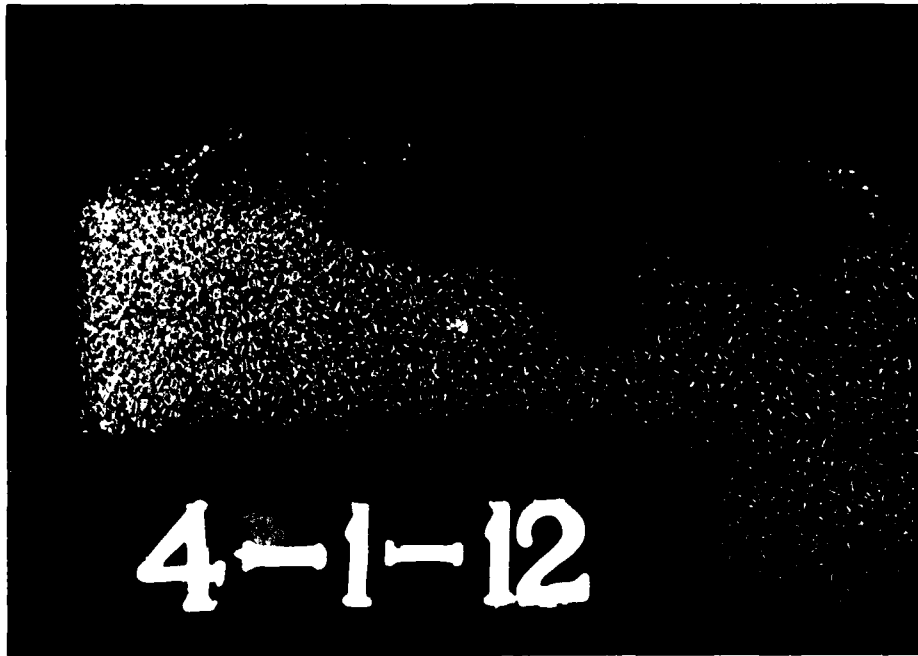


Figure 16. Cross-sectional view of red foam specimen from sustained horizontal top-burning experiments.

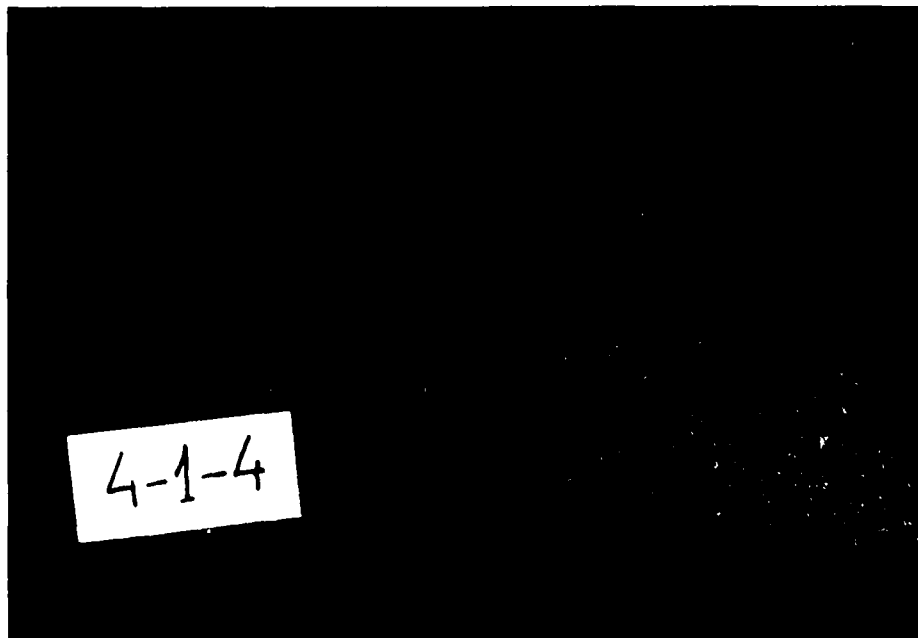


Figure 17. Cross-sectional view of fuel-soaked blue foam specimen that had been involved in sustained burning in horizontal position.

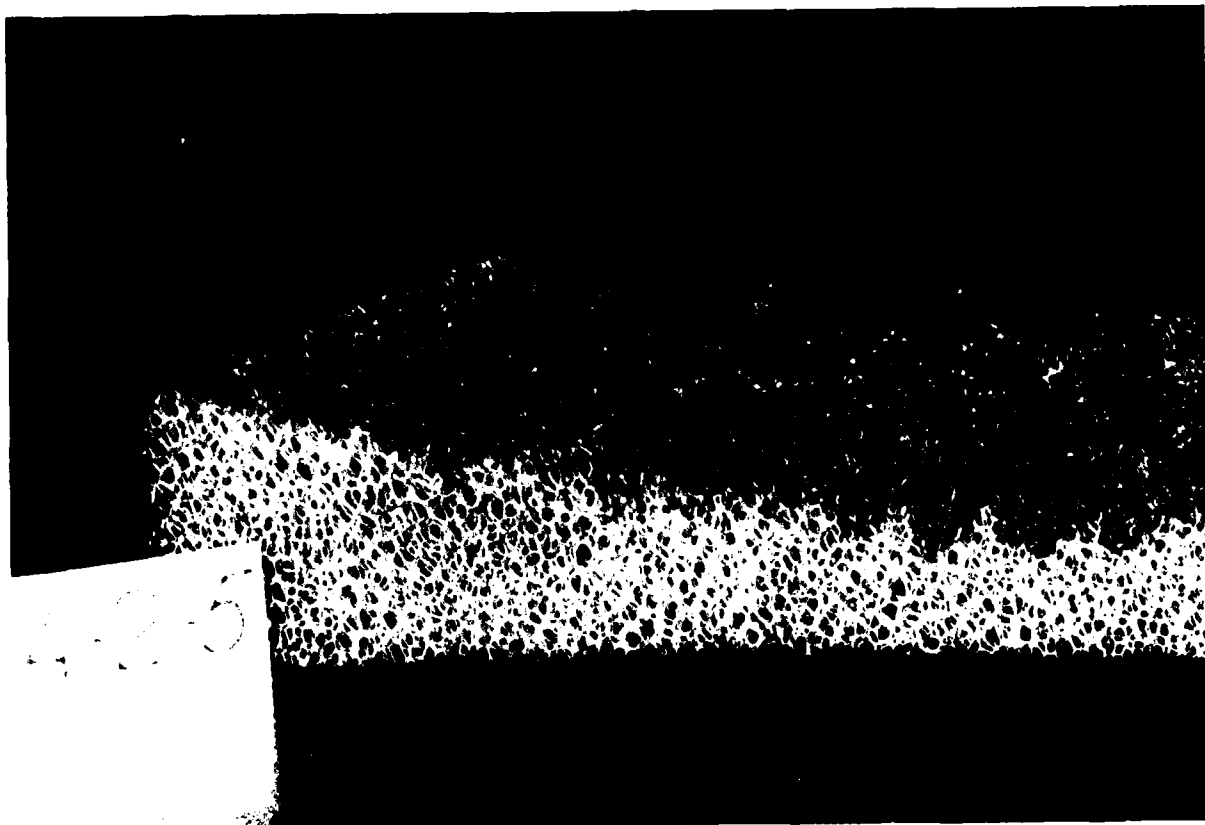


Figure 18. Cross-sectional view of fuel-soaked blue foam specimen that had been involved in sustained burning in vertical position.

3.1.9 Summary of Observed Effects of Aging and Simulated Sunlight, Heat, and Fire Exposure on Polyurethane Foams

For a concise overview of incident simulation test results, highlights of Sections 3.1.1 through 3.1.8 have been summarized in Table 11. It is hoped that investigators will be able to develop accident scenarios more rapidly and reliably with the help of this table and the figures to which references are made therein.

3.2 FLASH FIRE EXPOSURE

The flash fire experiments were designed to explore the effects of certain system variables on foam involvement and flame propagation. These simulation tests were performed at the Aero Propulsion Laboratory. The following variables were encompassed in this investigation:

- (1) Foam geometry
- (2) Foam type
- (3) Propane concentration in air
- (4) Dry and fuel-wetted conditions
- (5) Nonvented versus vented enclosure
- (6) Initial pressure

Forty-three tests were conducted; the results are summarized in Table 12. The first seven tests were performed without a channel being cut into the foam between the voided spaces. For the remaining tests, a channel was cut into the foam to ensure flame propagation into both voids.

Individual foam specimens from twenty-one experiments were subsequently photographed. The experimental data for these experiments, and observations made at the time and subsequent to experiments, are summarized in Table 12. Photographs depicting

TABLE 11. SUMMARY OF OBSERVED EFFECTS OF AGING,
AND SIMULATED SUNLIGHT, HEAT, AND
FIRE EXPOSURE ON POLYURETHANE FOAMS

Exposure	Effects	Figure(s)
Accelerated aging in air	Discoloration, progressing uniformly throughout the sample. Reduction of flexibility. Eventual breakdown and disintegration of foam structure.	5-7
Accelerated aging in JP-5	Discoloration, progressing uniformly throughout the sample. The rate of discoloration is slower with samples immersed in fuel than upon aging in air. Reduction of flexibility.	8
Simulated sunlight exposure	Discoloration, progressively diminishing from the surface exposed to light source toward the interior of the foam. Reduction of flexibility, especially at the surface.	9
Hot wire cut	Effects depend upon cutting speed. When cut at normal speed (10 ft/min), signs of melting and resolidification of polymeric strand ends can be observed upon magnification. Surface degradation, recession of foam, and beading of darkened, degraded polymer mass is observable subsequent to cutting at reduced rates.	10
Hot air impingement	Localized discoloration, melting, degradation, and foam recession. Solidified droplets of polymer mass may be observable on the walls of the recession. Since hot air diffuses into the foam structure, discoloration, without change of foam physical structure, is observable below shrunken and degraded foam mass.	11 & 12

(continued)

TABLE 11 (continued)

Exposure	Effects	Figure(s)
Radiant heating	Localized discoloration, surface degradation and melting, depending upon the severity of exposure. The depth of the discolored zone, below the surface, is shallower than upon exposure to hot air impingement.	13
Brief flame impingement	Localized degradation and darkening, restricted to sample surface. No damage affected below the surface.	14
Sustained burning	Localized degradation, darkening of foam, and beading of solidified mass mainly limited to foam surface. Little damage in areas adjacent to and below the burn zone. Severe darkening of foam surface during sustained burning of fuel-wetted foam.	15 & 16 21 & 22

TABLE 12. FLASH FIRE TESTS WITH FLAME TUBE^a

Test No.	Foam type	Propane conc., vol. %	P _I , psia	T _I , °F	Pressure rise, ΔP, psid	Time to max. ΔP, sec.	Remarks
1	Blue	3.5	14.37	70	2.0	0.06	Severe burning in Void 1. No flame propagation to Void 2.
2	Blue	5.0	14.37	73	2.0	0.04	Heavy burning in Void 1. Minor damage in Void 2, probably caused by hot gas rather than flame.
3	Blue	6.5	14.31	69	2.0	0.17	Heavy burning in Void 1. Flame seen in Void 1 for about 10 seconds. No damage in Void 2.
4	Blue	3.5	14.31	68	3.5	0.11	Percent voiding increased to 32.5 by removing pieces A, V, CL, and CR from Void 1. Heavy burning in Void 1. No damage in Void 2.

(continued)

TABLE 12 (continued)

Test No.	Foam type	Propane conc., vol. %	P _I , psia	T _I , °F	Pressure rise, ΔP, psid	Time to max. ΔP, sec.	Remarks
5	Blue	5.0	17.70	68	12.0	0.18	Flame propagated through all the material. Minor damage in Void 1, moderate damage in Void 2.
6	Blue	3.5	17.70	68	2.0	0.06	Heavy burning and 5 second flame duration in Void 1. No damage in Void 2.
7	Blue	6.5	17.70	68	2.0	0.17	Heavy burning in Void 1. No damage, but foam ash (white) deposited in Void 2.
8	Blue	5.0	14.34	70	11.0	0.12	Little damage in both voids. Flame propagated through channel only.
9	Blue	3.5	14.43	70	3.0	0.25	Same results as test number 8. Foam ash deposited in both voids.
10	Blue	6.5	14.41	70	3.0	0.60	Heavy damage in Void 1. Severe damage in Void 2. Ash blown through piece D.
11	Yellow	3.5	14.42	75	3.5	0.14	Heavy burning and 10-12 second flame durations in both voids. All pieces fused together after test.
12	Yellow	5.0	14.41	75	4.5	0.20	Moderate damage in Void 1. Heavy damage in Void 2. Flame durations of 1 and 5 seconds, respectively.
13	Yellow	6.5	14.42	72	4.0	~2.0	Severe damage in both voids. Flame duration about 8 seconds.

(continued)

TABLE 12 (continued)

Test No.	Foam type	Propane conc., vol. %	P _I , psia	T _I , °F	Pressure rise, ΔP, psid	Time to max. ΔP, sec.	Remarks
27	Blue	5.0	14.33	70	2.0	0.06	Heavy damage in both voids. Hot gas damage to areas of unburned foam.
28	Blue	6.5	14.33	70	0.5	0.14	Similar results as in test number 27.
29	Red	3.5	14.33	70	1.0	0.06	Minor damage in Void 1. Moderate damage in Void 2.
30	Red	5.0	14.44	70	1.5	0.06	Similar results as in test number 29. Hot gas damage to areas of unburned foam.
31	Red	6.5	14.40	70	2.0	0.07	Similar results as in test number 29.
32	Yellow	3.5	14.40		1.0	0.07	Moderate damage in both voids.
33	Yellow	5.0	14.38		1.0	0.07	Similar results as in test number 32.
34	Yellow	6.5	14.38		~0	0.10	Minor damage in both voids.
35	Blue (wet)	3.5	14.31		1.0	0.01	Minor damage in both voids.
36	Blue (wet)	5.0	14.31		1.0	0.06	Minor damage in Void 1. Severe damage in Void 2.
37	Blue (wet)	6.5	14.31		0.5	0.11	Similar results as in test number 35.
38	Yellow (wet)	3.5	14.31		1.0	0.09	Moderate damage in both voids.
39	Yellow (wet)	5.0	14.36		1.0	0.06	Similar results as in test number 39.

(continued)

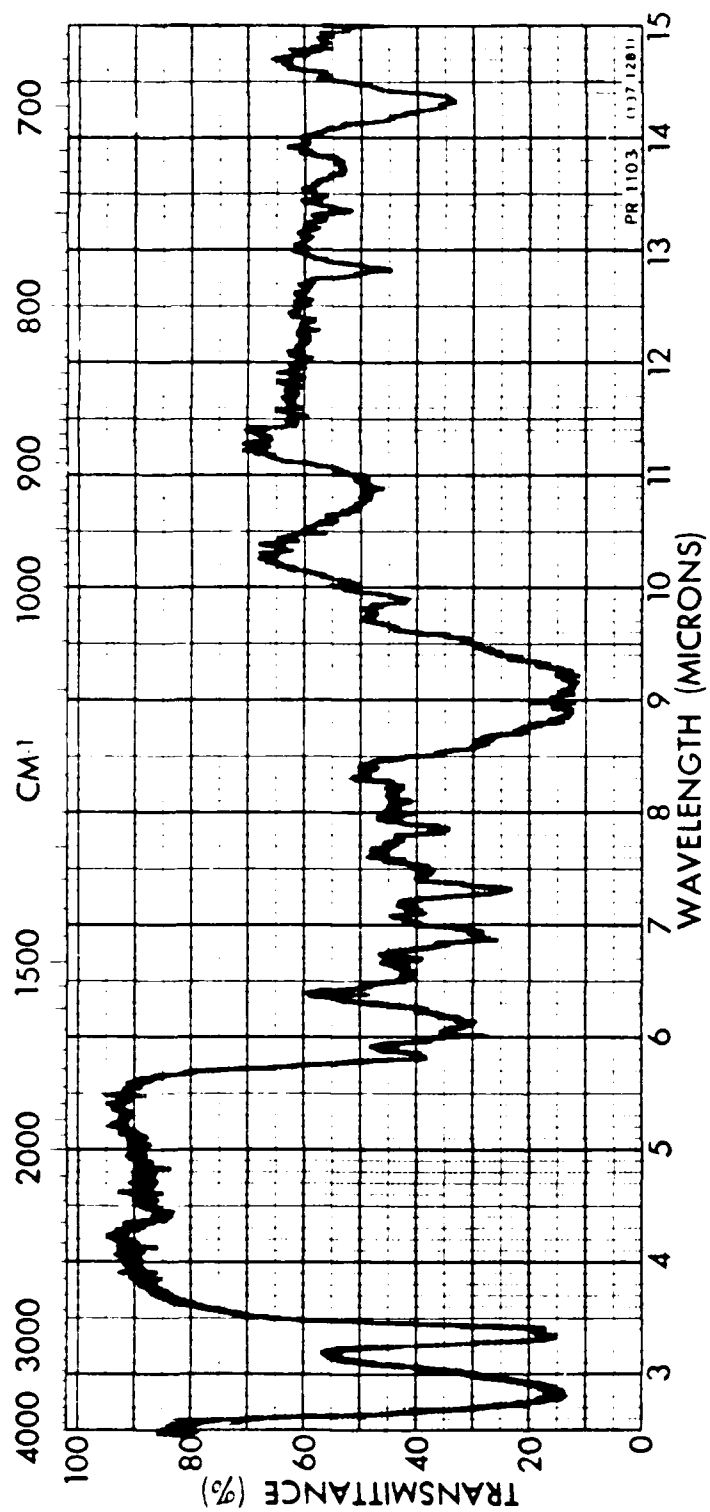


Figure 27. Infrared absorption spectrum of the liquid, brown-colored pyrolysis product formed from blue polyurethane foam.

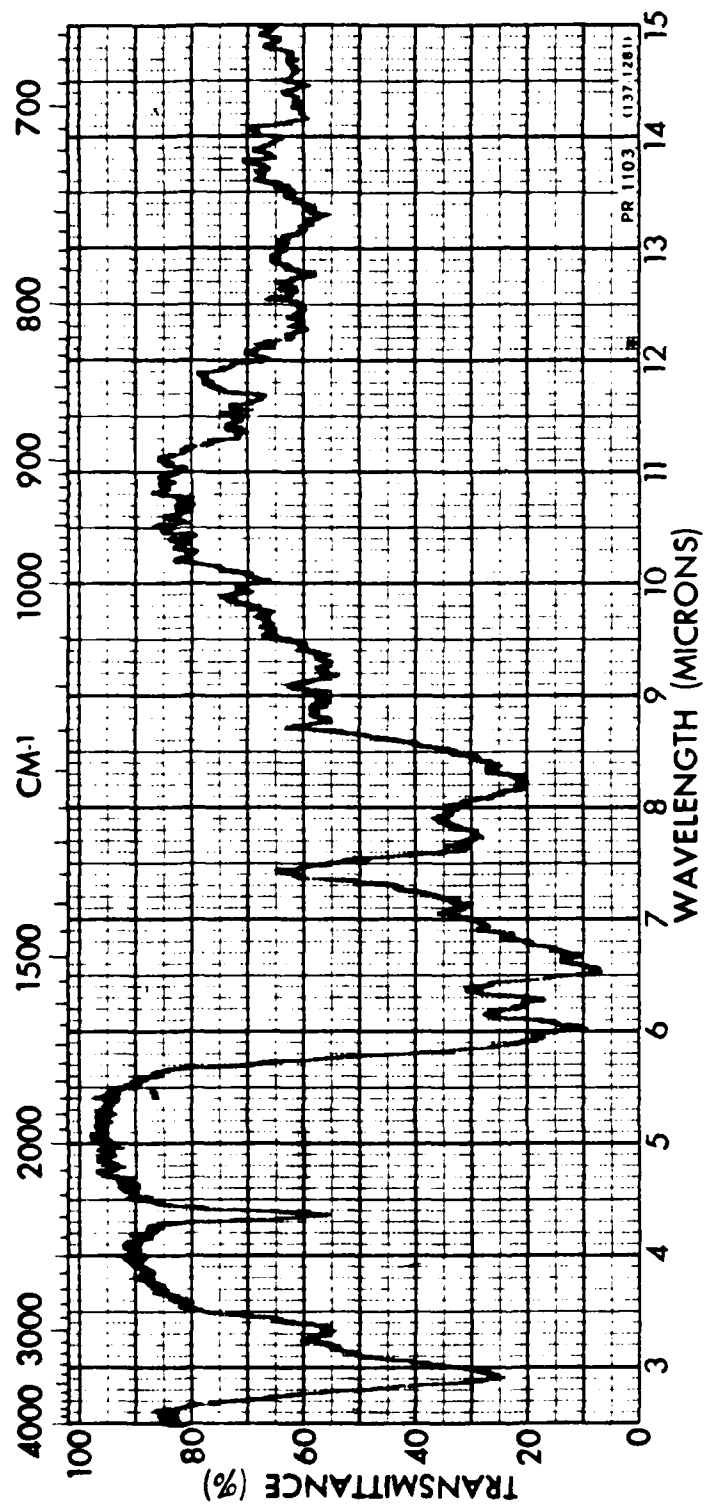


Figure 26. Infrared absorption spectrum of the solid, tan-colored pyrolysis product formed from blue polyurethane foam (in KBr matrix).

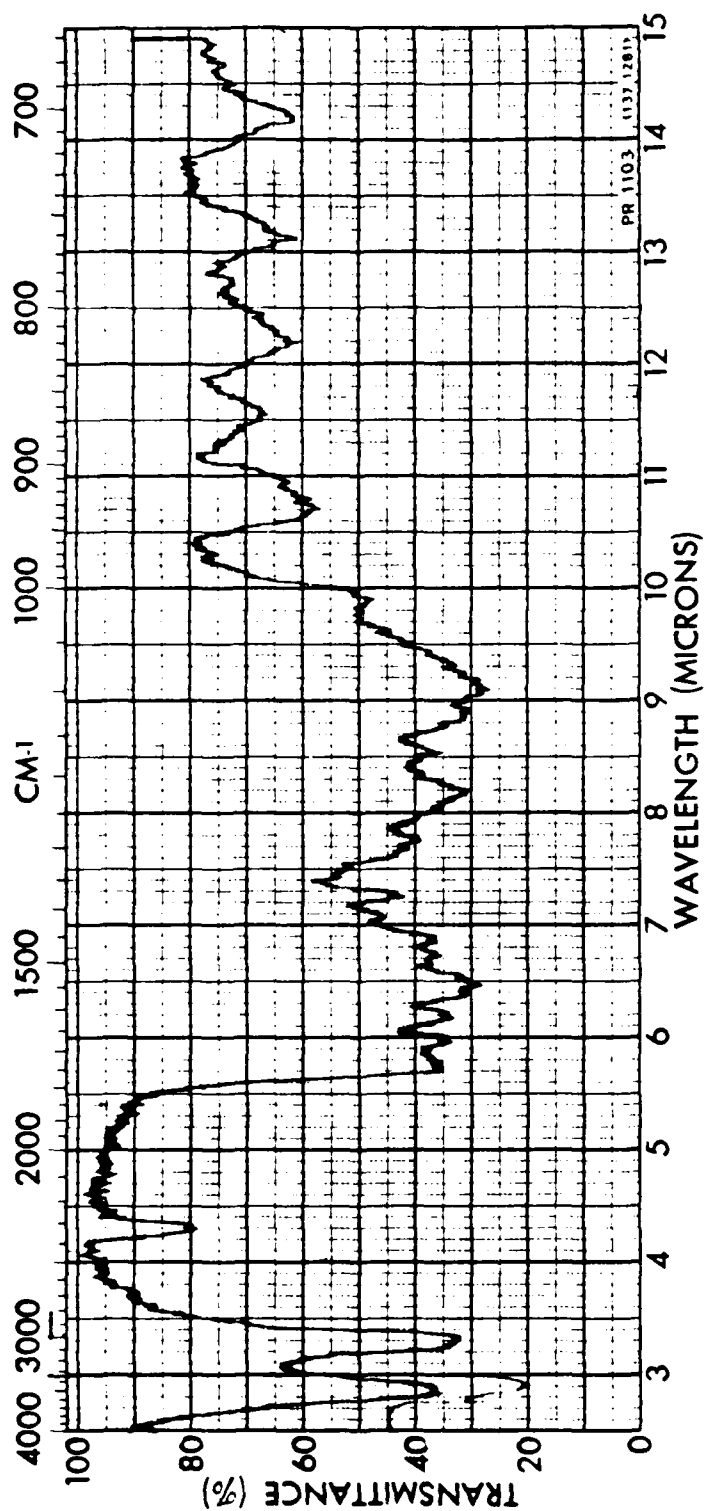


Figure 25. Infrared absorption spectrum of blue polyurethane foam (Scott Safety Foam SF 0025, Type 5, in KBr matrix).

Polyurethane foam , #2343801 B

Type of Crucible: 9*25mm Al2O3 Heating Rate (degC/min): 10.0 DTG Range (mg/min): 1.0
 Atm. (GAS/[1/hr]): He/180div Alumina Ref. Wt. (mg): 0.000 TG Range (mg): 10
 Thermocouple Type: PtRh10Pt Initial Sample Wt. (mg): 10.978 DTA Range (microV): Off

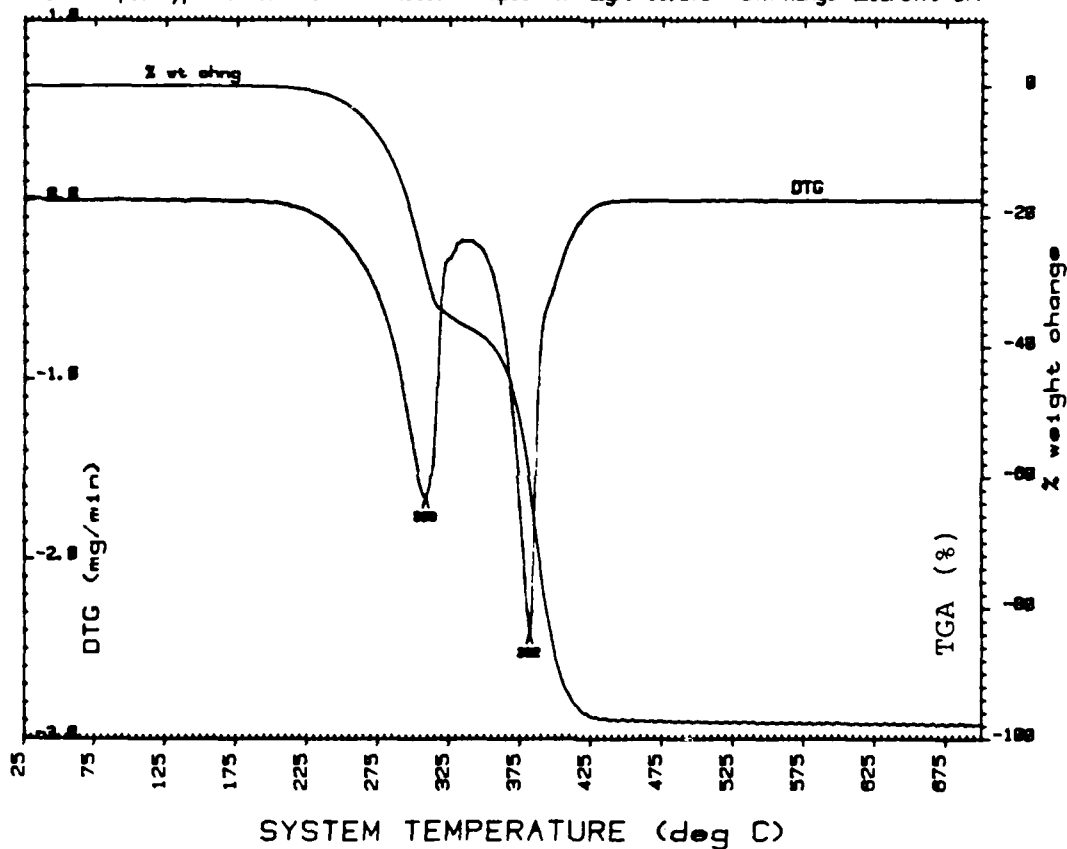


Figure 24. Thermogram and differential thermogram for degradation of blue polyurethane foam in helium.

Polyurethane foam #2,343,801 B

Type of Crucibles 9x25mm Al2O3
 Atm. (GAS/(l/hr)): Air/100lv
 Thermocouple Types PtRh10X-Pt

Heating Rate (degC/min): 10.0
 Alumina Ref. Wt. (mg): 0.000
 Initial Sample Wt. (mg): 10.100

DTG Range (mg/min): 1.0
 TG Range (mg): 10
 DTA Range (microV): Off

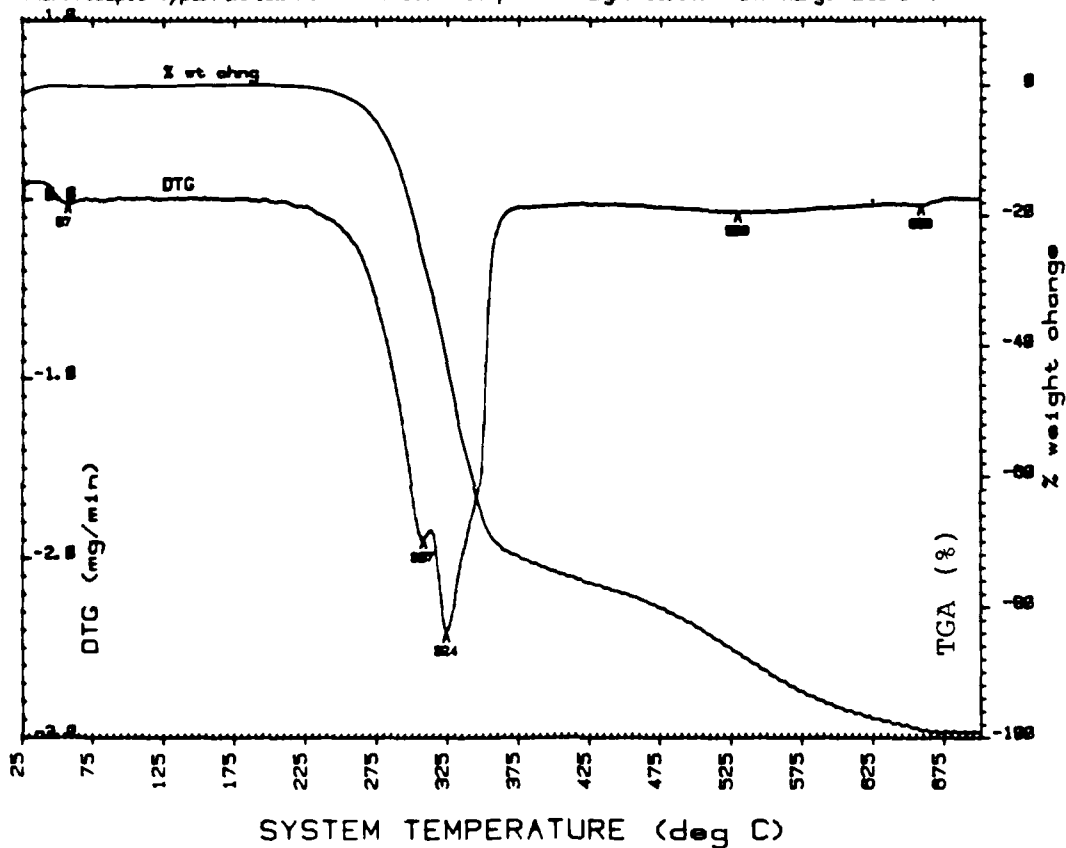


Figure 23. Thermogram and differential thermogram for degradation of blue polyurethane foam in air.

TABLE 13. SUMMARY OF TGA AND DTG DATA FOR BLUE POLYURETHANE FOAM IN AIR AND HELIUM ATMOSPHERES

	<u>In air</u>	<u>In He</u>
<u>First degradation step</u>		
Onset, at °C	~195	~195
Maximum degradation rate, at °C	308	307
First step completed, at °C	~337	~360
Weight loss, %	37	~71
<u>Second degradation step</u>		
Maximum degradation rate, at °C	382	529
Second step completed, at °C	~435	~665
Weight loss, %	~61	~28
Residue, weight, %	2	1

reference to the two diisocyanate unit nitrogen atoms, is represented approximately by the empirical formula $C_9H_{11}N_2O$. The solid degradation product differs from the original foam by loss of volatiles represented approximately by the C_3H_{10} atomic ratio.

The yield of the tan solid was found to increase with diminishing oxygen concentration and reduced exposure of degradation products to oxygen during pyrolysis.

The composition of the black reticulated char formed in Experiment 3 (see Table 11) indicates extensive oxidative removal of hydrogen during prolonged heating of foam in air.

3.3.3 Infrared Spectroscopic Analysis of Degradation Products

The infrared absorption spectrum of the reference sample of unused, blue foam is shown as Figure 25. The spectrum of the tan, solid pyrolysis product from Experiment 1 is presented in Figure 26; the spectrum of the liquid degradation product from the same experiment is shown in Figure 27.

V_c = combustion volume
 V_r = relief volume
 N = specific heat ratio

When the flame propagates through the material, the combustion overpressure is slightly higher than with a flame arrestor system having the same combustion volume and configuration.

In Test 5, the damage to the foam in both voids was minimal compared to the damage in other tests (see Figures 19 and 20). This was due to the short duration of combustion and complete depletion of oxygen, as discussed in Section 3.2.3.

In the experiments in which the flame was arrested, severe damage occurred in the first void. This damage resulted from extended burning of residual fuel/air mixture in this void. These gases moved into Void 1 by convection. Under those burning conditions, the effects of initial pressures were negligible.

3.3 LABORATORY-SCALE, CONTROLLED DEGRADATION EXPERIMENTS WITH BLUE POLYURETHANE FOAM

3.3.1 Thermogravimetric Analysis

The thermogravimetric analysis and differential thermogravimetric curves indicated that the degradation proceeded in two steps. The data from thermogravimetric analyses are summarized in Table 13 and presented graphically in Figures 23 and 24.

3.3.2 Pyrolysis and Thermo-Oxidative Degradation of Blue Foam Under Controlled Conditions

Controlled degradation experiments were performed with the blue foam at temperatures ranging from 500° to 842°F (260° to 450°C). A light tan, solid degradation product was isolated (see Tables 10 and 11, and Figure 5). Its composition, calculated with

3.2.5 Effect of Pressure

The effect of pressure was investigated with the blue foam in Experiments 1-3 and 5-7 (see Table 12). At 14.4 psia pressure, flames did not propagate through the foam, although finely divided solids were deposited. Severe hot gas damage, resulting in charring, was caused at the higher pressure (17.7 psia) to specimen D. In these experiments, the foam acted as a flame arrestor in all tests, except for Experiment 5. In the latter test, a 5 vol.-% propane mixture with air was ignited at an initial pressure of 17.7 psia; the resulting flame propagated throughout the chamber. The combustion overpressure of 12 psid was much higher than in most other tests, in which the flame did not propagate through the foam, therefore not igniting the gases in the second void. The 5 vol.-% propane air mixture also resulted in maximum combustion overpressure for a propane and air mixture at the given initial pressure.

The combustion overpressure is a function of the fuel/air ratio, the initial pressure and temperature, the tank geometry, and the amount of explosion suppression material. For an empty chamber (constant volume), the maximum overpressure occurs at a slightly fuel rich mixture; it is approximately 8 times the initial pressure. For a chamber filled with an explosion suppression material that will arrest the flame (flame does not propagate through the material), the combustion overpressure is predicted by (Ref. 10):

$$\frac{P_C}{P_I} = \left[\frac{(V_R/V_C) + 1}{(T_I/T_C)^{1/N} + (V_R/V_C)} \right]^N$$

where P_C = combustion pressure
 P_I = initial pressure
 T_C = combustion temperature ($^{\circ}\text{K}$)
 T_I = initial temperature ($^{\circ}\text{K}$)

consumption of oxygen through the oxidation of hydrocarbon species in vapor phase occurs more rapidly than by the burning of the polymeric foam. For the foam to burn, it must be thermally or thermo-oxidatively degraded. The volatile degradation products subsequently burn in the vapor phase. Consequently, the higher the CH_n content from hydrocarbon sources in the vapor phase, the less foam damage through burning will occur.

In view of results from Experiment 20, one can envision circumstances under which most of the oxygen in an aircraft fuel vent system will be consumed in flash fire supported by fuel vapors, with minimal evidence of foam damage. This is demonstrated in a photograph of Sample 1-1-20 in Appendix A1-10.

3.2.4 Effect of Venting

Some observations regarding the effect of venting on foam damage were included in the Experimental section.

In experiments performed in the vented mode, 6.5 vol-% propane in air produced the largest flame plume, in what appeared visually to be the most energetic reaction. However, reactions that occurred under those conditions produced less overpressure since most of the reaction occurred outside of the test chamber.

White smoke was seen puffing from the vent line in experiments conducted with dry foam in vented mode. Eventually, the puffing and pressure fluctuation in the system stopped without external intervention. The pressure increase was caused by the expansion of gases, composed of combustion and degradation products, out of the chamber. Internal pressure diminished upon cooling. Fresh air entered the chamber and caused reignition of fuel vapors. With fuel-wetted foam, it was necessary to extinguish the fire by blocking the vent tube after the test.

dropped to the bottom of the chamber, causing further damage to the foam samples. Examples of this phenomenon are shown in the photographs in Appendix A1-10.

3.2.3 Effect of Hydrocarbon Vapor Concentration; Dry vs. Fuel-Wetted Foam

The experiments were performed at fuel concentrations in vapor phase between lower and upper flammability limits. The lower flammability limit for propane in air is 2.1 vol-%; the upper flammability limit is 9.5 vol-% (Ref. 9). In two experiments (Exps. 22 and 25) listed in Table 12, the propane concentration (2.0 vol-%) was below the lower flammability limit for that hydrocarbon. However, fuel-wetted foam was used in these experiments. Thus, the total combustible hydrocarbon concentration was in the flammable range.

Foam damage due to surface burning at atmospheric pressure was related inversely to propane concentration (see figures pertaining to Exps. 1 and 10, 11 and 12, 14 and 16, and 23 and 25 in Appendix A1-10). Since there was no air flow into the chamber, the extent of burning was oxygen-limited.

The effect of the presence of aircraft fuel on foam damage was also investigated. For this purpose, foam samples were wetted with JP-5. In experiments performed under identical conditions, except for the presence of fuel, less extensive foam damage occurred with wetted material. It should be noted that this comparison applies to experiments performed both in the unvented and in the vented mode.

It is suggested that the reason for reduced foam damage from surface burning, observed upon increase of propane concentration in vapor, or introduction of fuel vapors, is analogous. The total extent of burning in the enclosed space is oxygen-limited. The

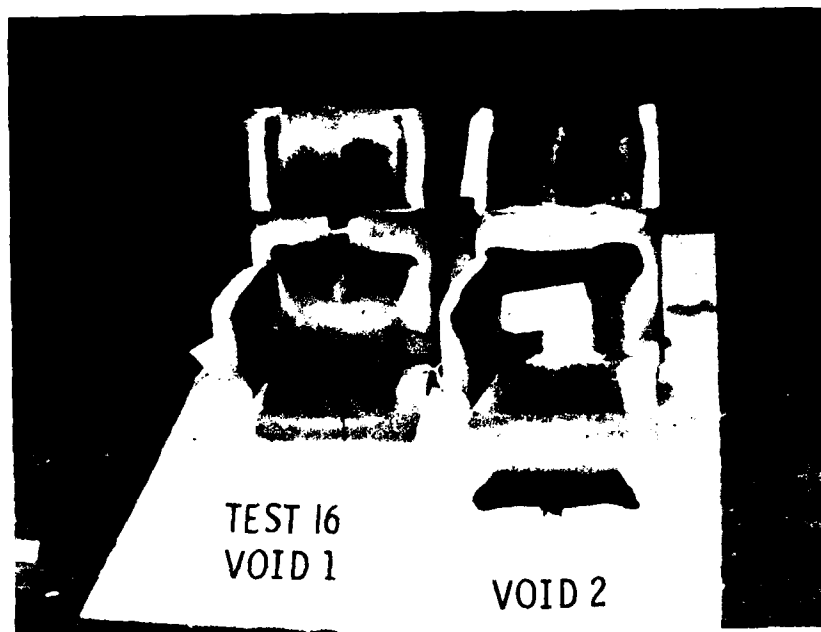


Figure 21. Red foam damage pattern, Test 16.

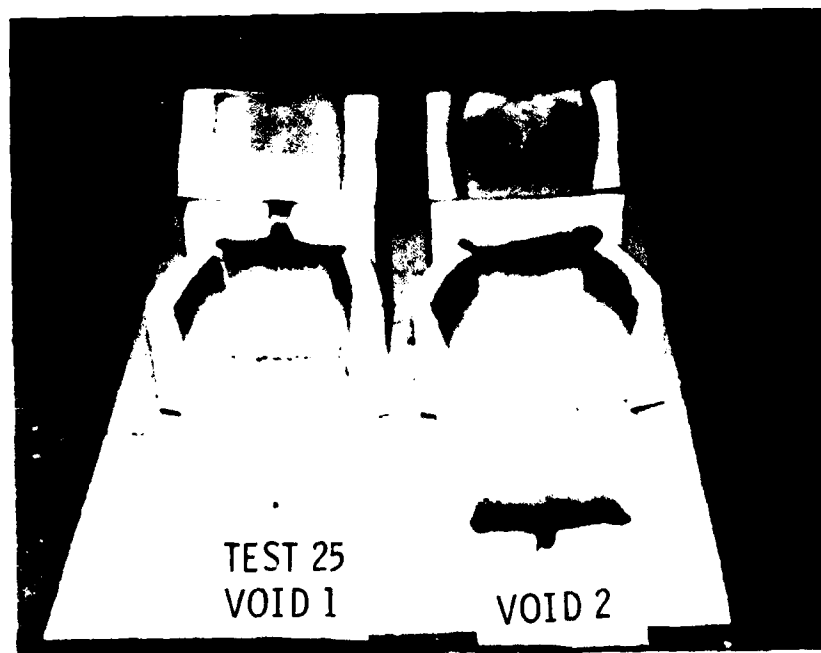


Figure 22. Yellow foam damage pattern, Test 25.



Figure 19. Blue foam damage pattern, Test 22.

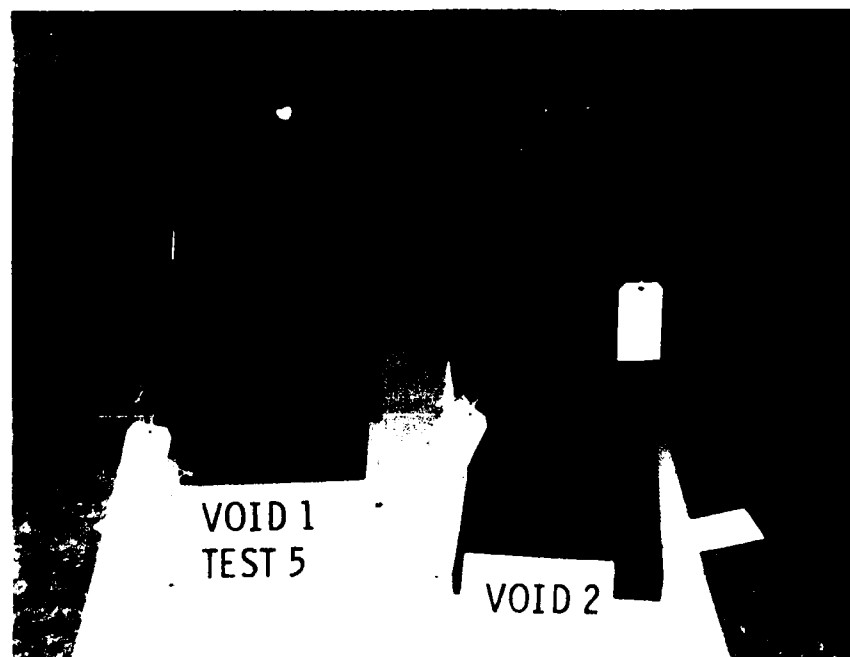


Figure 20. Blue foam damage pattern, Test 5.

Typically, the vertical foam pieces 1 and 3 were most severely damaged (see Figures 1 and 19 through 22). They were located on the downstream side, with reference to the flame path direction, of each void. The vertical piece 2, located at the upstream side of Void 2, was in general less severely damaged than pieces 1 and 3. Foam pieces A and E, located at the top of each void, were also severely damaged due to the rise of hot gases (and flame) during and after combustion.

Pieces B and F, located at the bottom of each void, sustained little damage from the combustion. However, they were subsequently damaged when hot polyurethane from pieces A and E dripped onto these pieces.

Pieces D and H, which were not exposed to the voided sections, did not show evidence of burning, except along the flame propagation channel. They were damaged by the traversing hot gases.

For the foam to show evidence of burning, it must be exposed to a voided section. In some cases, burning occurred between two adjoining foam pieces, probably because the pieces were in loose contact or slightly separated from each other.

The damage to the flame propagation channel extended from unnoticeable to severe. The affected surface was typically coated with a tan-colored deposit from the foam degradation.

3.2.2 Effect of Foam Type

The two foam types, the blue polyether and the red and yellow polyester, degrade differently when exposed to flash fire impingement. The degradation products of the polyether-based foam were slightly tacky; the molten and subsequently solidified droplets of polymer mass contracted into small clusters. In contrast, the polyester-based foams formed droplets that did not solidify. They

TABLE 12 (continued)

Test No.	Foam type	Propane conc., vol. %	P _I , psia	T _I , °F	Pressure rise, ΔP, psid	Time to max. ΔP, sec.	Remarks
40	Yellow (wet)	6.5	14.36		0.5	0.07	Minor damage in both voids.
41	Red (wet)	3.5	14.21		0.5	0.08	Minor damage in both voids.
42	Red (wet)	5.0	14.21		1.0	0.06	Moderate damage in both voids.
43	Red (wet)	6.5	14.34		0.5	0.13	Minor damage in both voids.

^aVoid volumes totaled 20%; 10% for each void. In the vented tests, the vent tube increased the total voiding to 22%. Tests 8-43 had a channel cut through at the top from Void 1 to Void 2. All test samples were dry, except where noted. Tests 1-25 were conducted with a closed chamber, in tests 26-43, the chamber was vented.

samples from flash fire exposure experiments are presented in Appendix A1-10 of this report.

The charred foam surfaces indicate that sustained burning occurred in all twenty-one experiments. Combustible gas concentration in the confined spaces was the major factor that controlled the extent of foam burning.

3.2.1 Effect of Foam Geometry

Foam configuration was a critical factor in affecting the extent of damage inflicted on foam samples. In general, foam in Void 2 was more severely damaged than foam in Void 1. This may have been caused by ignition in the second void at a higher pressure, caused by the burning in the first void.

The infrared spectrum of the solid degradation product (see Figure 26) indicated the presence of urethane (-NH-CO-) functionality (NH stretch at 2.9 μ , NH bend at 6.6 μ and CO stretch at 6.0 μ). This spectrum also indicates that the solid degradation product lacks most of the ether functionality (C-O-C stretch at 9.1 μ) present in the original polyurethane. The tan solid also contains some N=C=O functionality (band at 4.35 μ).

The C-O-C functionality from the foam appears in the liquid degradation product (see Figure 27). That product also contains OH and/or NH functionality (band at 2.8 μ).

3.4 EXAMINATION AND ANALYSIS OF POLYURETHANE FOAM SAMPLES RECOVERED FROM AIRCRAFT INCIDENT SITES

The work presented in this report was pursued as a follow-up to some aircraft incident investigations. It was learned in controlled simulation experiments, in conjunction with these investigations, that the physical effects of aging, and simulated sunlight, heat and flame exposure upon the polyurethane foam differ. The type of unwanted exposure can often be deduced by close examination of specimens. To illustrate this, the appearances of some specimens recovered from incident sites, and their probable exposure conditions will be discussed.

3.4.1 Foam from Fuel Vent Tanks

All three specimens (Specimens 1-3; see Figures 28-30) exhibited surface degradation in an irregular pattern. Pieces of char adhered to the affected surface. In most of the affected areas, foam damage did not extend deep below the surface (see Figure 31). Consequently, it is concluded that this damage was caused by burning of the foam.

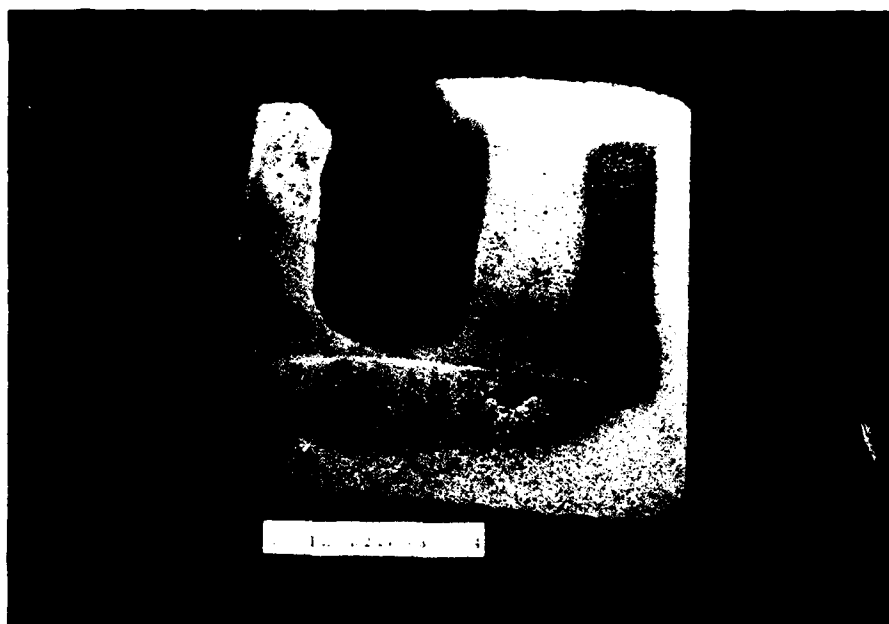


Figure 28. Fuel vent tank foam, left half,
A/C 78-717 (Specimen No. 1).

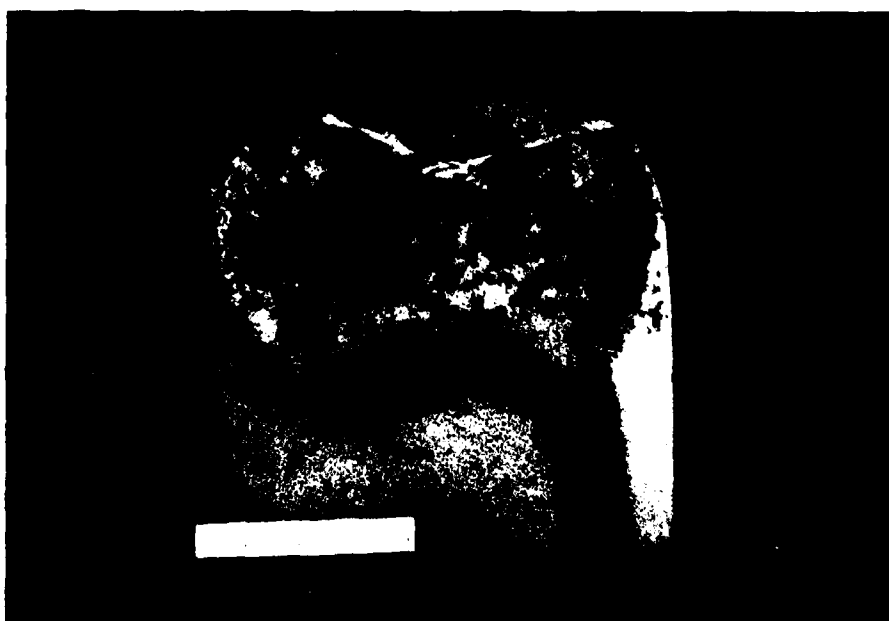


Figure 29. Fuel vent tank foam, right half,
A/C 78-717 (Specimen No. 2).



Figure 30. Fuel vent tank foam, left half,
A/C 78-704 (Specimen No. 3).



Figure 31. Close-up view of the damaged segment of
fuel vent tank foam from A/C 78-704
(Specimen No. 3).

In addition to degradation through combustion, there appears to have been exposure to radiant heating. This caused surface charring, on front faces of specimens, without sharp lines of demarcation. The pattern of the charred area (see Figure 32) may be indicative of the shape and location of the heat source. The severity and depth of heat-induced damage are seen to diminish with distance from the exposed surface (as positioned in Figures 28 to 30, and 32).

A coating of white, powdery substance was observed on the right hand side of two pieces recovered from A/C 78-717 (see Figures 28 and 33). That powder had been deposited from a gas stream in directional manner (from lower right in Figure 28), as evidenced by the nonuniformly distributed coating on foam strands. Instrumental surface analysis revealed subsequently that this white coating consisted almost entirely of potassium carbonate. The incident pattern appears to have repeated itself with a different aircraft (see Figure 34).

Potassium carbonate on the foam is believed to have been deposited from gun gases. Gunpowder contains potassium nitrate, carbon, and sulfur (see Appendix 3). Formation of potassium oxide, carbon dioxide, nitrogen oxides, and sulfur oxides should be anticipated upon detonation. Potassium oxide and carbon dioxide would partially combine, to yield potassium carbonate. In diving maneuvers, the finely divided potassium carbonate powder could be drawn into the fuel vent tank, where it would deposit on the foam surface.

3.4.2 Fuel Tank Foam

The inside surface of the depicted assembly of void filling foam (Specimen No. 4; see Figures 35 to 37) had been exposed to flash fire(s) of short duration. The surfaces of foam pieces were singed. The damage did not extend into the foam.



Figure 32. Two halves of fuel vent tank foam from A/C 78-717 (Specimens Nos. 1 and 2) placed together.



Figure 33. Close-up view of white powder deposit
on the surface of fuel tank foam
(Specimen No. 1).



Figure 34. Left halves of fuel tank foam
from A/C-s 78-704 and 78-717.

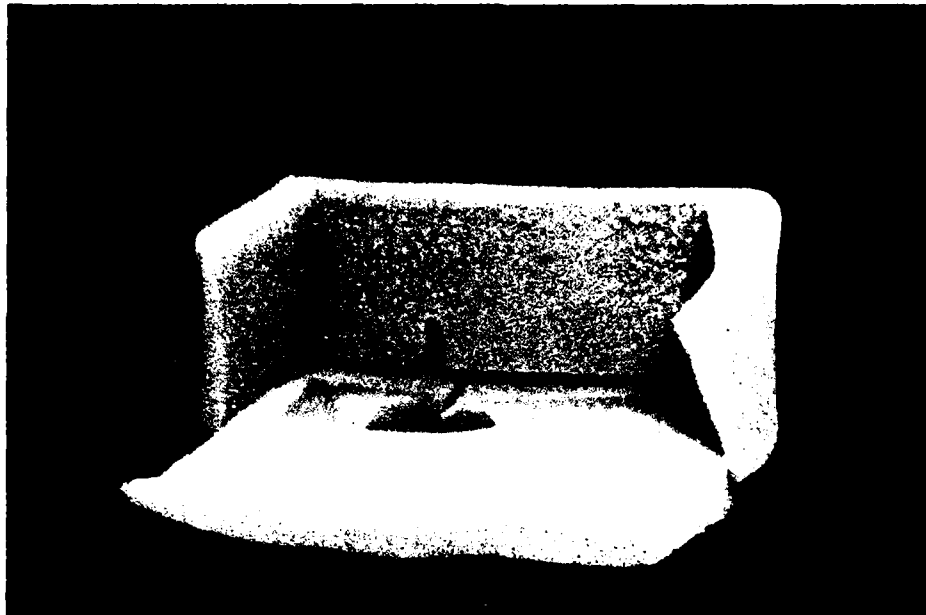


Figure 35. Wing tank foam, A/C 78-717
(Specimen No. 4).

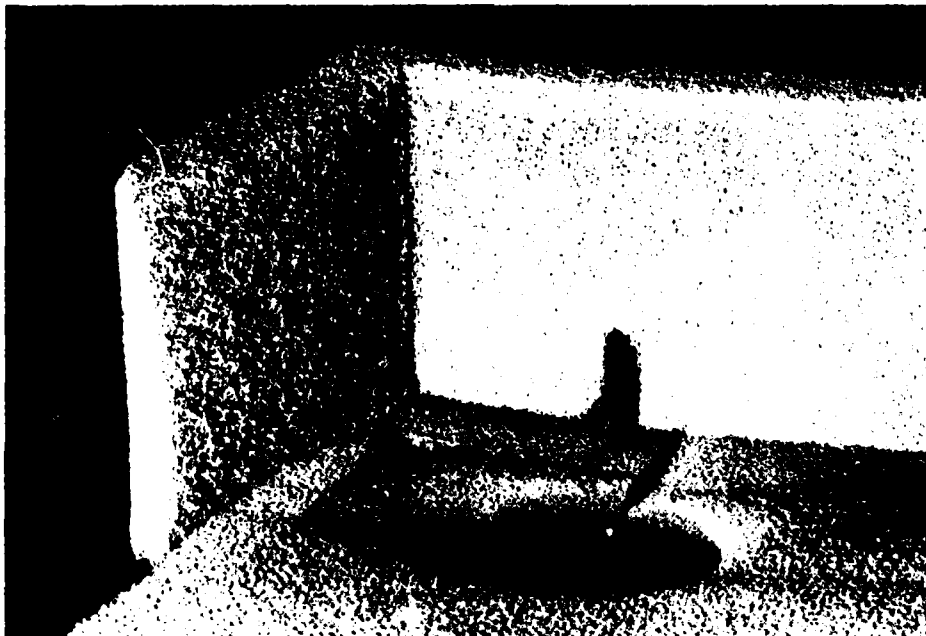


Figure 36. Fire-damaged surface of fuel
tank foam (Specimen No. 4).



Figure 37. Close-up view of the fire-damaged surface of fuel tank foam (Specimen No. 4).

Four pieces of foam from void space around the vent outlet in a wing tank of A/C 78-717 are shown in Figure 38; a closer view of one of these pieces is presented in Figure 39. Foam surfaces protected by contact with metal appear bright blue. Most of the exterior surface of these specimens is faded blue in color. This appearance may stem from prolonged exposure to air currents. The tan coloration in some areas of the surface can be attributed to flash fire of very short duration, that did not affect the entire exposed foam surface area in the same manner, or to foam degradation products from foam burning in the vent tank which are drawn into the wing vent outlet area.

Most extensive discoloration is believed to be related to most severe exposure to the flash fire (see the upper left corner of the specimen in Figure 39). By exposing a cross-sectional area below the tan surface, it was learned that the damage did not extend deep below the surface ($\leq 1/8$ in.). Microscopic examination of the affected surface revealed degradation and darkening of polymer strands, especially at the ends formed in hot wire cutting. The shallow penetration of damage, and evidence of thermal degradation and darkening at the surface, are characteristic signs of hot wire cutting and flash or brief duration fire exposure (see Table 11).

3.4.3 Wipings from Vent Masts and from Right Side Vent, Tank Dome

The wipings of surface contaminants from the vent systems (Specimens Nos. 11-16) were contained on pieces of gauze. Only the solids in Specimens Nos. 11, 14, and 16 were essentially free of oily or greasy contaminants. They consisted of finely divided, tan-colored solid. This substance was very similar in physical appearance to the solid polyurethane degradation product whose composition is presented in Table 11. The infrared spectra of the solids from Specimens 11, 14, 15, and 16 (see Figure 40 for

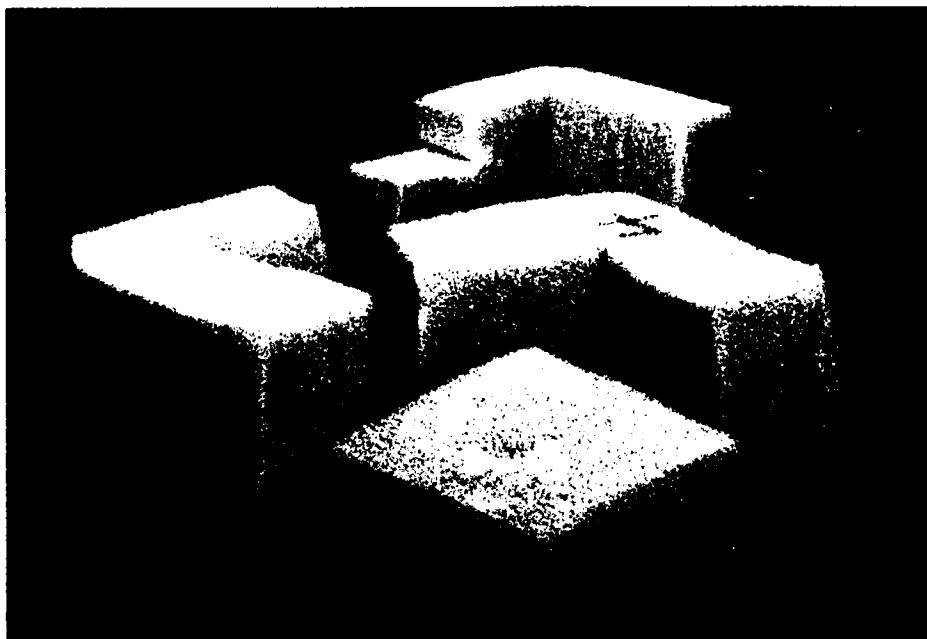


Figure 38. Foam pieces from the wing tank of A/C 78-717 (Specimens Nos. 5-8).

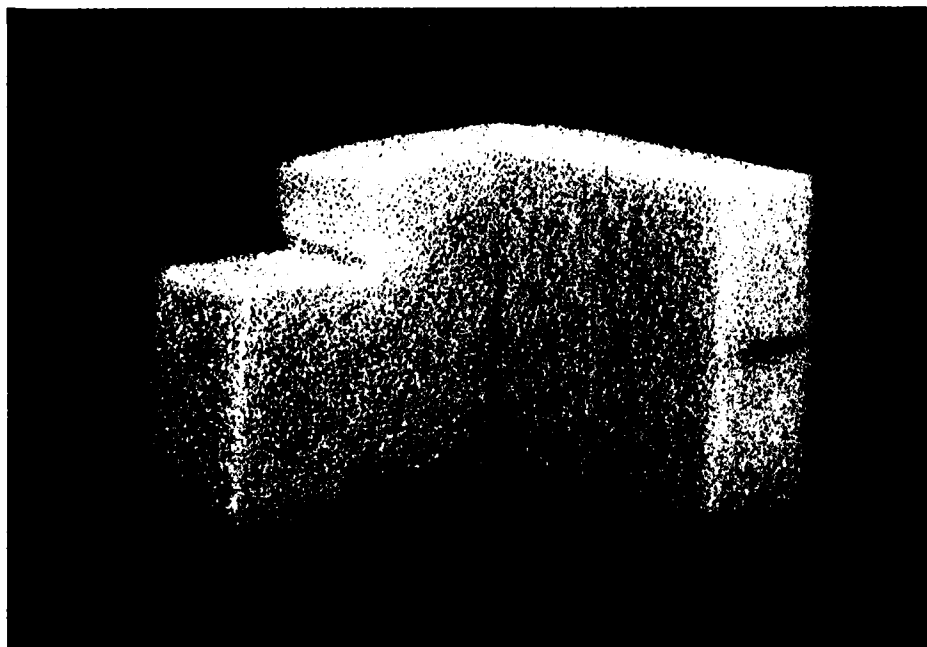


Figure 39. Inside view of foam specimen from the wing tank of A/C 78-717.

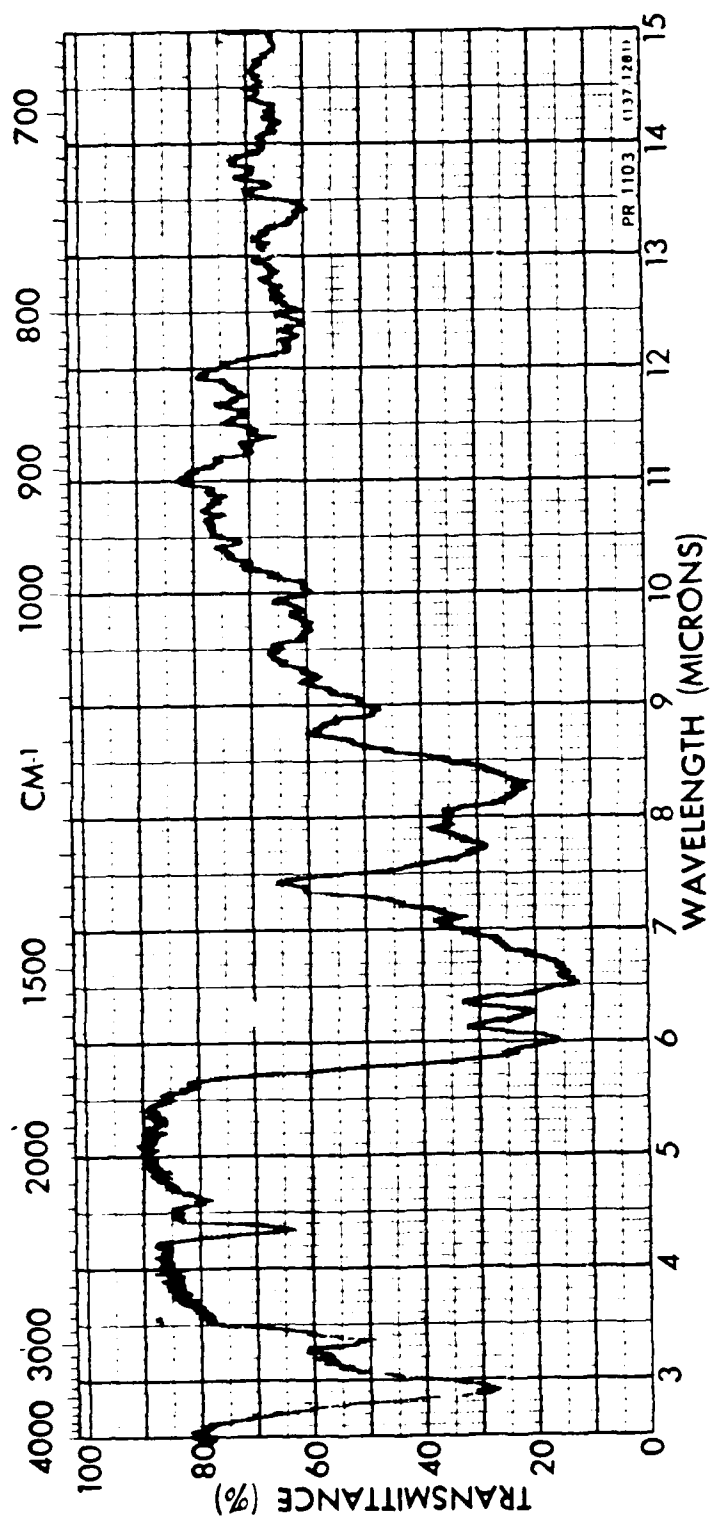


Figure 40. Infrared spectrum of wipings from vent mast of A/C 78-704 (Specimen No. 11; in KBr matrix).

the spectrum of Specimen No. 11) resemble closely that of the solid formed upon degradation of polyurethane foam under controlled conditions (see Figure 26). Specimens 12 and 13 did not yield sufficient quantities of powdered solid for spectroscopic characterization.

It is concluded that the finely divided tan-colored solid substances, recovered as wipings from the fuel vent mast surfaces, are composed of solid thermal degradation products of polyurethane foam.

3.4.4 Emission Spectrographic Analysis of Specimens from Aircraft Incident Sites

In search for metallic contaminants, that could be of assistance in tracing the incident scenarios, emission spectrographic analyses were performed on the following specimens:

1. Polyurethane foam from vent tank of A/C 78-717. Two samples were taken. One from the surface with the white deposit (see Figure 33); the other sample was taken as reference approximately one inch below the surface.
2. Filter paper used for collection of particulate solids from Specimen 14 (wipings from the vent mast of A/C 78-717).
3. Filter paper used for collection of particulate solids from Specimen 16 (wipings from dome of the right side vent tank, A/C 78-717).

An unused filter paper served as the blank sample for the latter two specimens. The emission spectrographic analyses were performed by Bowser-Morner Testing Laboratories, Inc. The report is included as Appendix 6.

The analyses of the foam revealed the presence of potassium, sodium, aluminum, iron, silicon, and lead as major contaminants. Relatively smaller amounts of calcium, magnesium, manganese, and titanium were also detected. See Appendix 2 for analytical data on the metals, and Appendix 3 for data on gun gases.

No significant quantities of metallic contaminants were detected in the wipings from the fuel vent systems.

3.4.5 Surface Analysis of Foam Specimen from Aircraft No. 78-717 Fuel Vent Tank

After detection of metallic contaminants in the foam sample recovered from the aircraft at the incident site, efforts were pursued to establish the distribution of the metals in the specimen. Surface analysis techniques were used for this purpose. These analyses were performed at the University of Dayton Research Institute. A copy of the report covering this work is included as Appendix 7.

It was established by scanning electron microscopy (SEM) that the white coating on the foam specimen, to which reference was made earlier (see Figures 28, 33, and 41-44) is composed of an agglomerate of particles approximately 2 μm in diameter.

Energy dispersive X-ray analysis (EDXA) revealed the presence of potassium as the major metallic constituent in the surface deposit. It was established by X-ray photoelectron spectroscopy that carbonate is the prevalent anionic species in the surface deposit.

Using the combination of surface analysis techniques, it was thus determined that the white deposit observed on the foam specimen surface (see Figure 33) is potassium carbonate (see Appendix 3). The other detected metals (i.e., aluminum, silicon, iron, and lead; see Appendix 2) constitute less than three percent of deposit composition on the basis of EDXA measurements.

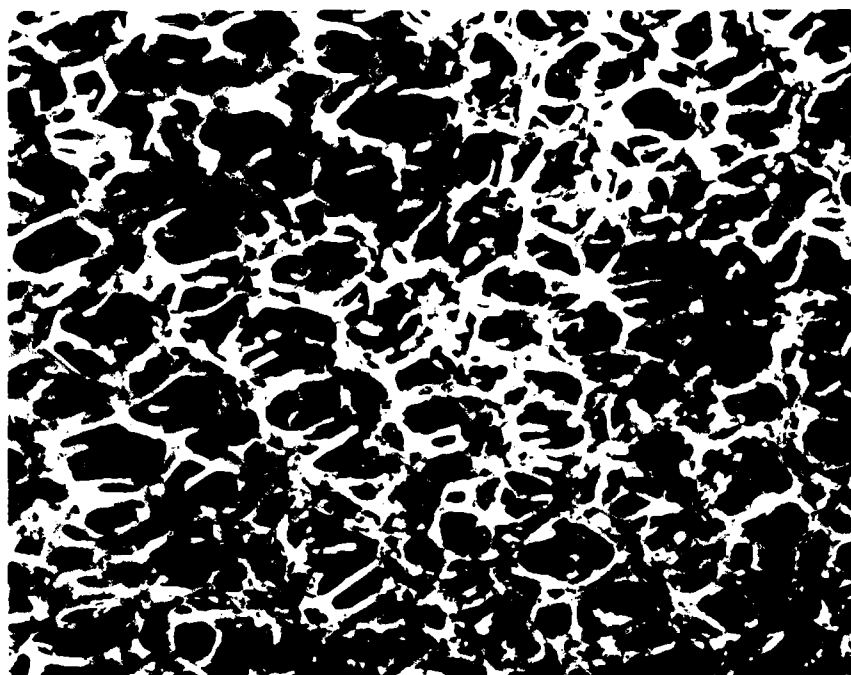


Figure 41. Light microscope photograph of deposit (white areas) on vent tank foam from A/C 78-717 (50X).



Figure 42. Scanning electron photomicrograph of deposit on vent tank foam from A/C 78-717 (100X).

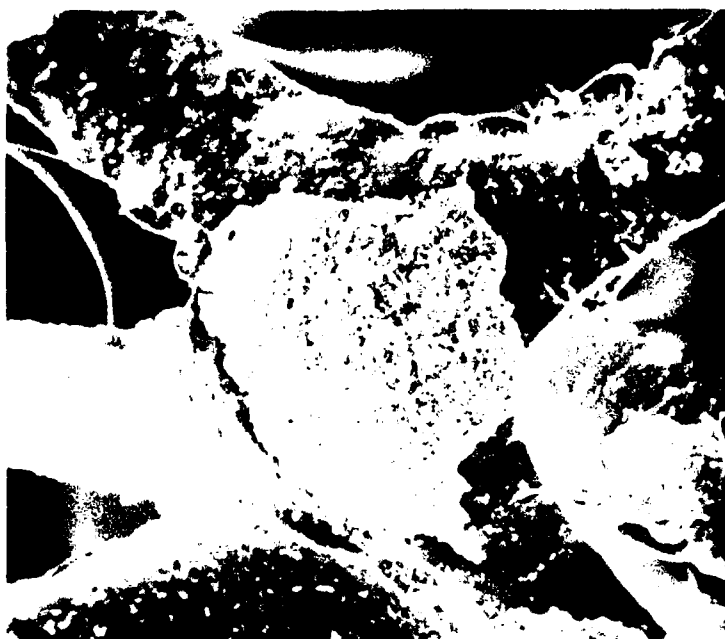


Figure 43. Scanning electron photomicrograph of deposit on vent tank foam from A/C 78-717 (100X).

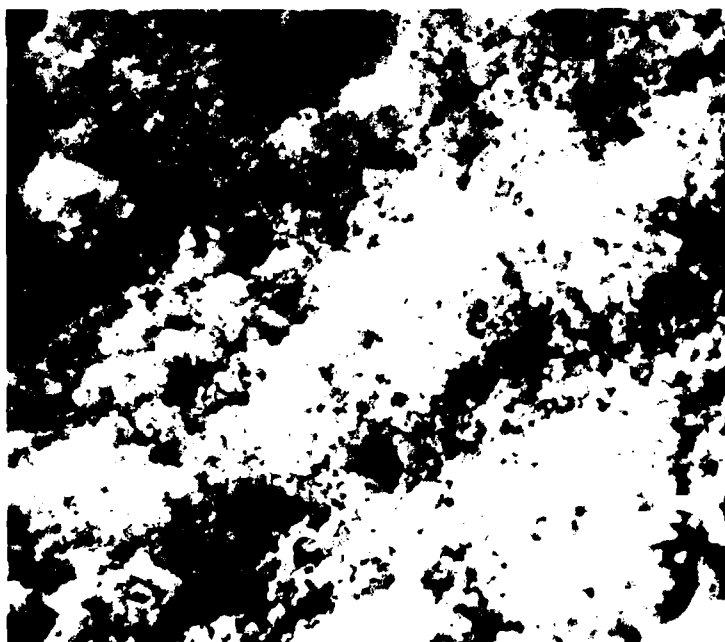


Figure 44. Scanning electron photomicrograph of deposit on vent tank foam from A/C 78-717 (1000X).

4. CONCLUSIONS

It was demonstrated that physical damage caused to reticulated polyurethane foams by different environmental exposures is often indicative of the type of exposure. Characteristics of damage caused by accelerated aging of foams in air and in liquid fuel (JP-5), simulated sunlight exposure, hot wire cutting, hot air impingement, flame impingement, and sustained burning were established and documented photographically. They are summarized in Table 11.

Flash fire experiments with foam samples in a flame tube served to simulate fire propagation in fuel vent systems. Combinations of damage effects (e.g., hot air impingement, brief flame impingement, and sustained burning) could be detected on foam specimens surrounding a vapor cavity. Similarly, exposures to different fire environments were evident in specimens originating from aircraft incidents.

Information about polyurethane foam damage characteristics, caused by controlled exposures, is expected to be useful for aircraft accident and fire investigators in developing incident scenarios.

Light tan solid deposits, collected as wipings from vent mast surfaces of aircraft that had been involved in incidents, were identified as polyurethane foam thermal degradation products.

White deposits on some pieces of damaged fuel vent tank foam were found to contain potassium carbonate. This substance may have originated from gun gases, and deposited onto foam surface during diving maneuvers.

REFERENCES

1. T. O. Reed and W. D. Vahle, "Qualification Test Results for Scott Paper Co. Blue Hybrid Polyether Foam," Aeronautical Systems Division Technical Memorandum ENFEF-TM-79-08, December 1979.
2. B. H. Wilt and J. M. Swieshelm, "Hydrolytic Stability of Reticulated Foams," University of Dayton Research Institute Report UDR-TR-81-74, August 1981.
3. D. Kelley, Scott Paper Company, telephone communication to L. Parts, 7 February 1983.
4. Sunlighter IV test chamber had been manufactured by Test-Lab Apparatus Company, Amherst, New Hampshire.
5. L. Parts and R. G. Olt, "High Temperatre (1649°C, 3000°F) Surface Ignition Test Apparatus for Fluids," AFWAL-TR-82-2110, November 1982.
6. T. A. Hogan and C. Pedriani, "Flame Tube and Ballistic Evaluation of Explosafe Aluminum Foil for Aircraft Fuel Tank Explosion Protection," AFWAL-TR-80-2031, April 1980.
7. H. W. G. Wyeth and T. W. Dickson, "Environmental Tests of Reticulated Plastics Foam for Use in Aircraft Fuel Tanks," Royal Aircraft Establishment Report 71194, September 1971.
8. B. H. Wilt, University of Dayton Research Institute, communication to L. Parts, June 1983.
9. Anon., "Fire Hazard Properties of Flammable Liquids, Gases, Volatile Solids," NFPA Publication 325M, National Fire Protection Association, Boston, 1977, p. 163.

10. Q. C. Malmberg, "Integrated Aircraft Fuel Tank Fire and Explosion Protection Systems. Phases I and II," AFAPL-TR-75-93, July 1975.

APPENDIX 1

PHOTOGRAPHIC DOCUMENTATION
OF TEST SPECIMENS

A1.1. INTRODUCTION

Appendix 1 of this report contains most of the photographic documentation relevant to the discussion in the preceding text. The photographs depict damage caused to polyurethane foam specimens by aging, simulated sunlight exposure, heat, and fire. The foams in the incident simulation experiments were those used by Air Force as void-filling and flame propagation inhibiting materials in aircraft fuel systems.

The photographs are presented in nine sections of this appendix. The sequence and numbering are identical with those used in the text.

In the beginning of each section is a table. Information pertaining to exposure conditions for all experiments of a specific type is summarized in that table. It serves as reader's guide for that section. To communicate information concisely, sample identifications and exposure conditions are often presented in captions by means of a three-number code system, X-Y-Z.

The first number, X, designates the test type as follows.

- 1 - flash fire
- 2 - hot wire cutting
- 3 - brief flame impingement
- 4 - sustained burning
- 5 - hot air impingement
- 6 - radiant heat exposure
- 7 - accelerated aging in simulated sunlight
- 8 - accelerated aging in air
- 9 - accelerated aging in jet fuel

The second number, Y, in conjunction with the first, designates a group of tests performed under identical, specified conditions (e.g., exposure duration, temperature, cutting rate, site of ignition, etc.). It may involve several foams. However, test conditions remained identical for all samples carrying the same first two numbers.

The third number, Z, was used for sequential identification of samples. In some instances (e.g., experiments with aged foam samples), insufficient sample material was available for performing all initially planned tests. In those instances, all sequential numbers do not appear in the tables.

For flash fire experiments, the second number identifies the sample location in the flame tube (see Figures A1-142 and A1-143 in this appendix). The third code number (Z) identifies the sequential test number.

It is suggested that the readers familiarize themselves with the meaning of the second number of the sample code system before viewing photographs in a section. That information is presented in column headings in the tables. Thus, the figure captions will often provide information regarding the exposure history of samples in shorthand form.

Magnified views of the structures of the three foams used in present work are shown in the following three figures.

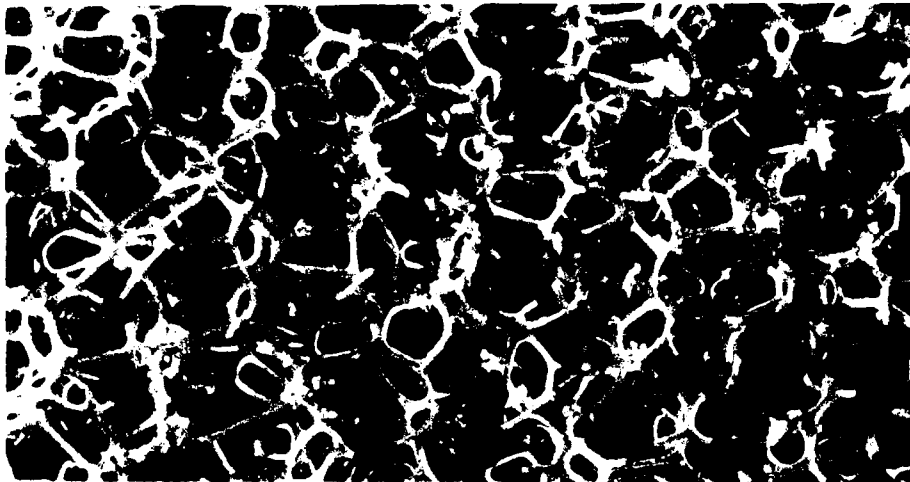


Figure A1-1. Magnified view of the Type IV blue foam structure. (Each scale subdivision is 1/16 in. long.)

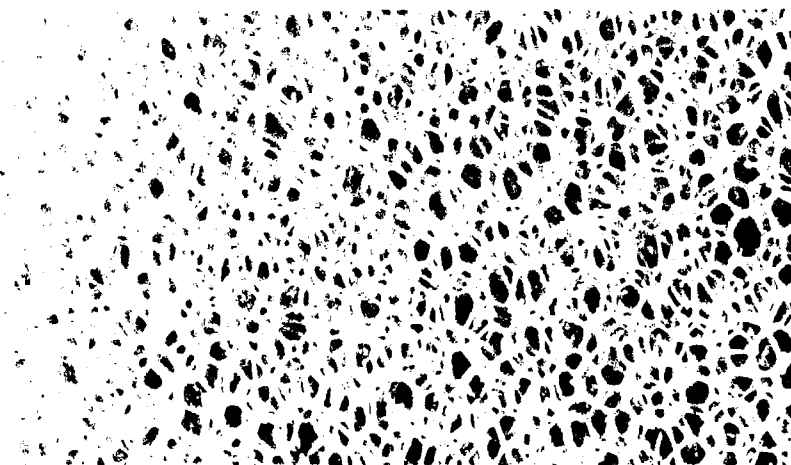


Figure A1-2. Magnified view of the red foam structure. (Each scale subdivision is 1/16 in. long.)



Figure A1-3. Magnified view of the yellow foam structure.
(Each scale subdivision is 1/16 in. long.)

A1.2. FIGURES DEPICTING FOAM SAMPLES FROM
ACCELERATED AGING TESTS IN AIR

The exposure history of foam samples, used for aging tests in air,
is summarized in Table A1-1.

TABLE A1-1. CODE FOR FOAM SPECIMENS PRODUCED
BY ACCELERATED AGING IN AIR^a

Foam	Sample size, in.	Exposure time, weeks				
		1	2	3	4	5
Blue, dry, new	3x3x2	8-1-1	8-2-1	8-3-1	8-4-1	8-5-1
	3x3x2	8-1-2	8-2-2	8-3-2	8-4-2	8-5-2
	3x3x2	8-1-3	8-2-3	8-3-3	8-4-3	8-5-3
	3x3x2	8-1-4	8-2-4	8-3-4	8-4-4	8-5-4
Red, dry, new	3x3x2	8-1-5	8-2-5	8-3-5	8-4-5	8-5-5
	3x3x2	8-1-6	8-2-6	8-3-6	8-4-6	8-5-6
Yellow, dry, new	3x3x2	8-1-7	8-2-7	8-3-7	8-4-7	8-5-7
	3x3x2	8-1-8	8-2-8	8-3-8	8-4-8	8-5-8

^aSamples were exposed to air at 200°F (93°C) and 95% relative
humidity in these accelerated aging tests.

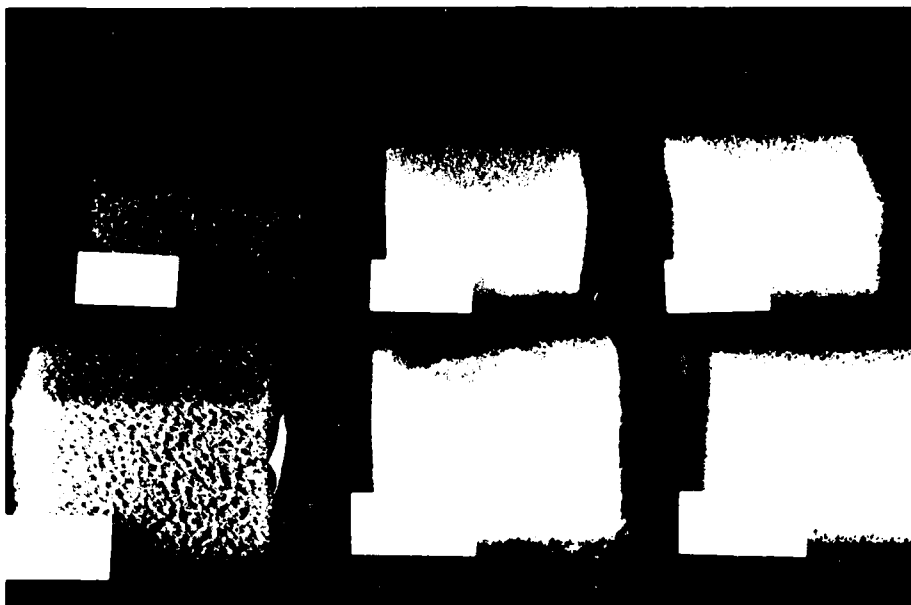


Figure A1-4. Cross-sectional views of blue, red, and yellow foam specimens, subjected to accelerated aging in air (8-5-1), five weeks; 8-2-5, two weeks; 8-2-7, two weeks).



Figure A1-5. Specimens of blue foam, subjected to accelerated aging in air at 200°F (93°C) for one to five weeks. (Reference sample of unexposed foam is also shown.)

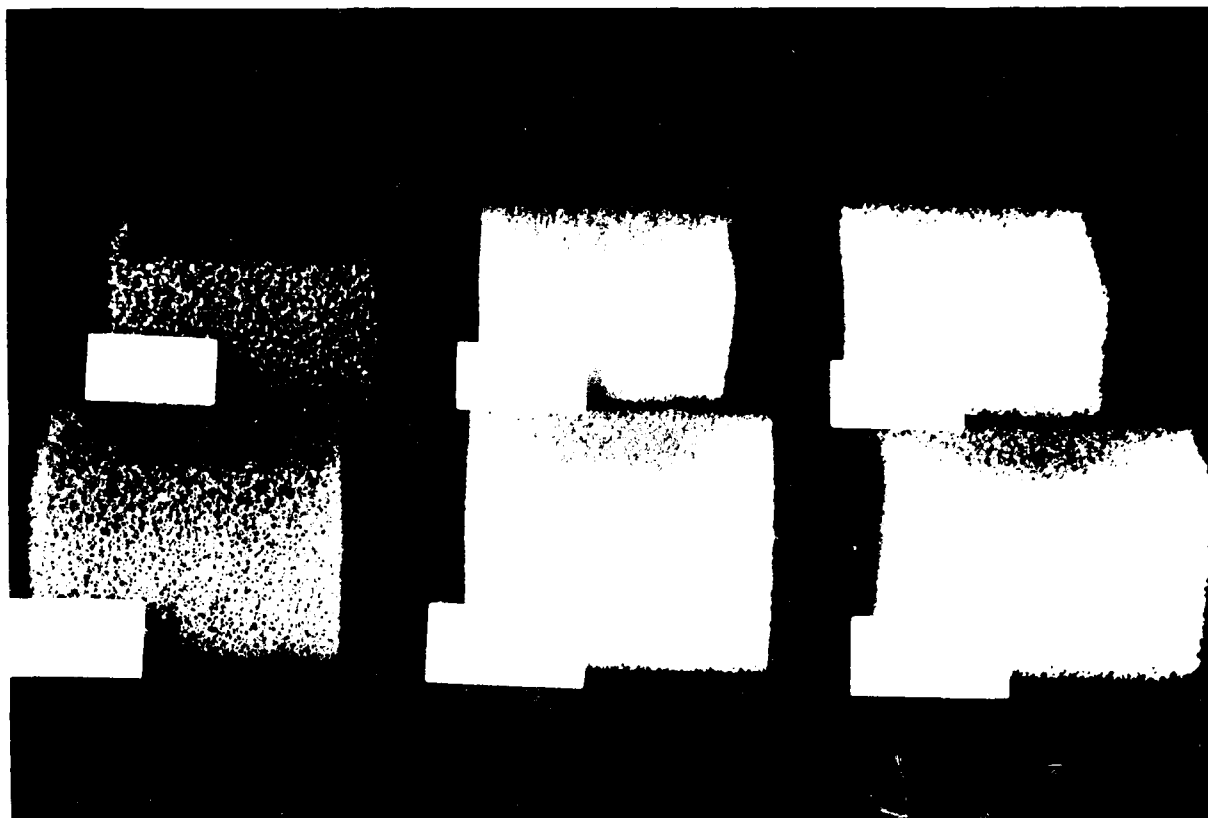


Figure A1-27. Specimen of yellow foam, subjected to accelerated aging in JP-5 at 200°F (93°C) for one to five weeks.

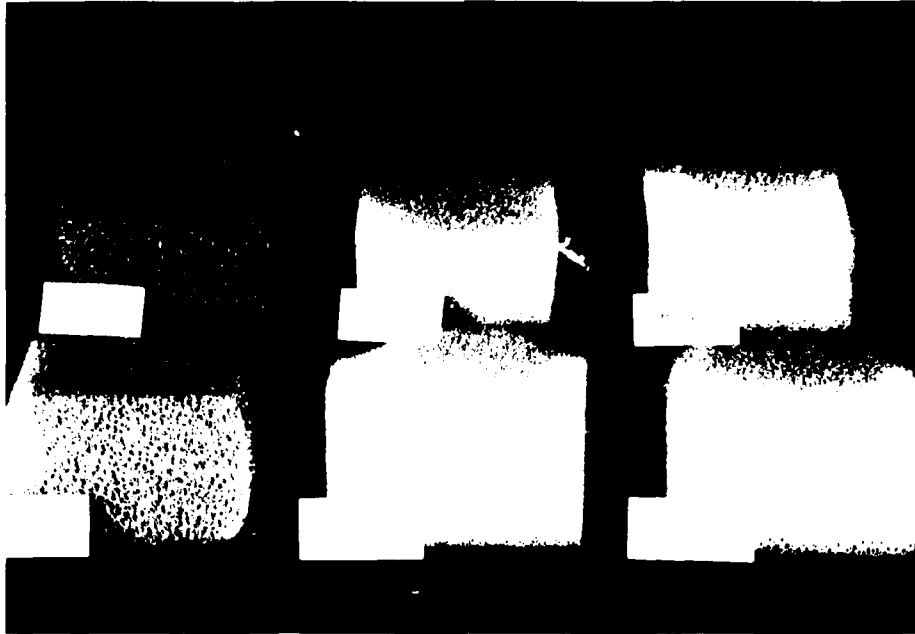


Figure A1-25. Sample 9-5-5, perspective view.

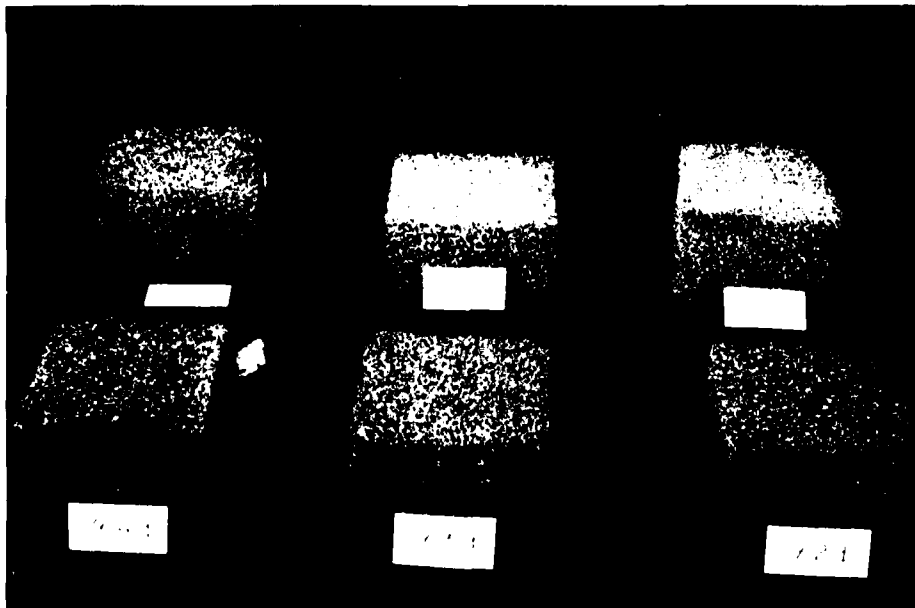


Figure A1-26. Sample 9-5-5, cross-sectional view.

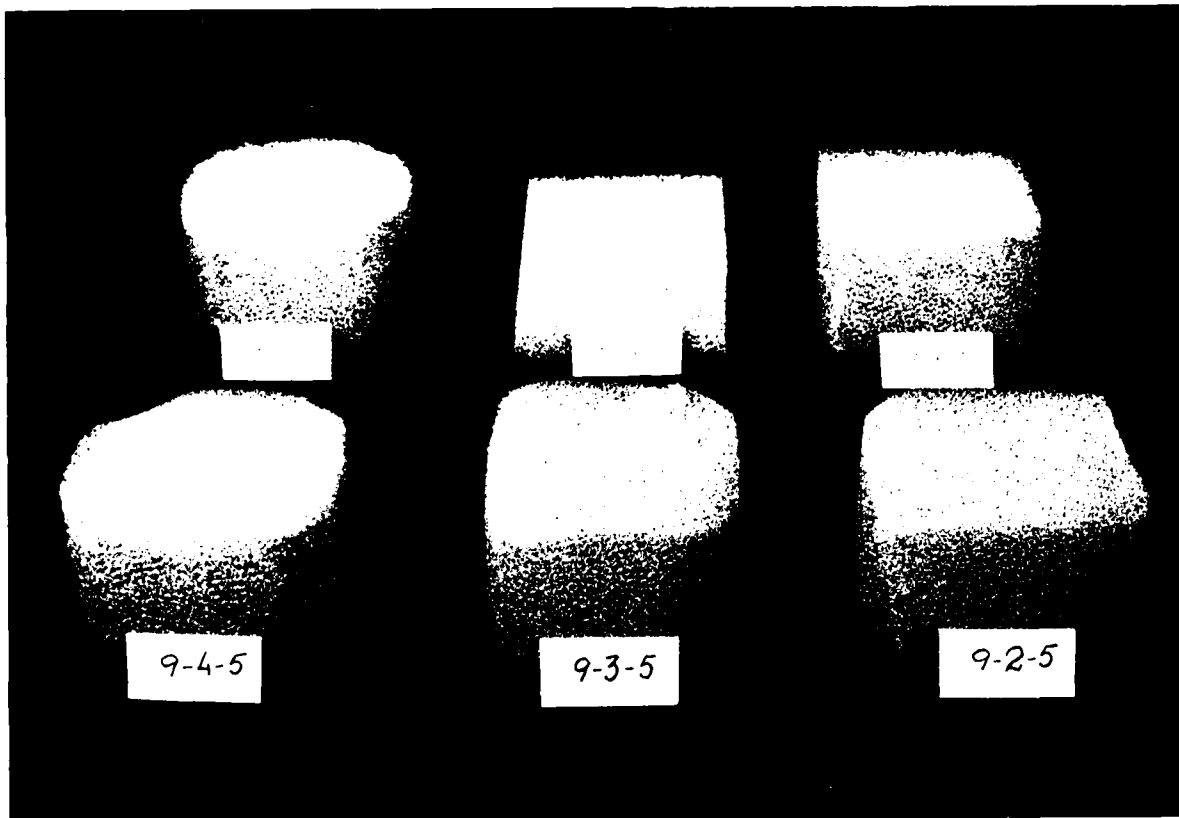


Figure A1-24. Specimens of red foam, subjected to accelerated aging in JP-5 at 200°F (93°C) for one to five weeks.

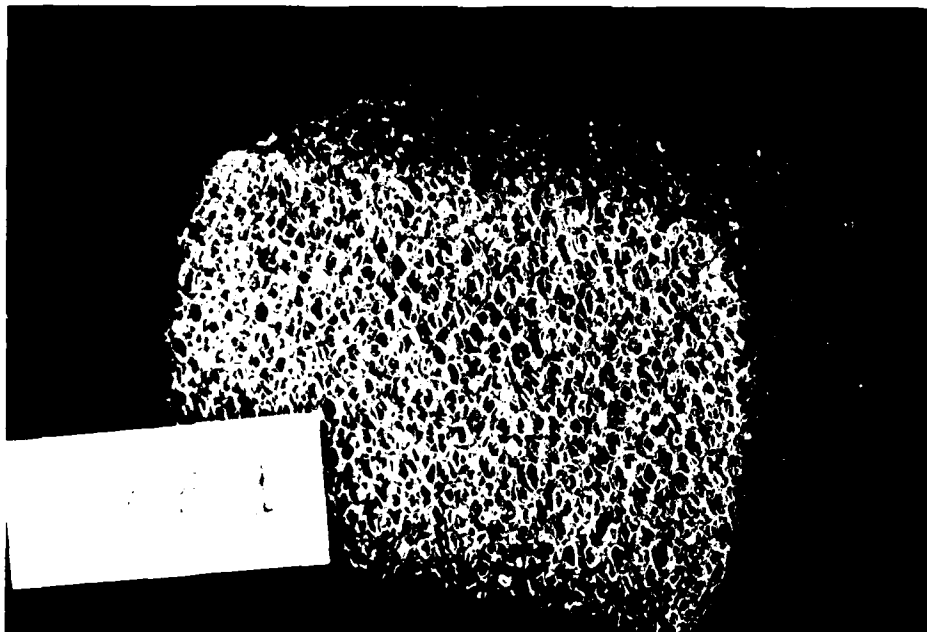


Figure A1-22. Sample 9-5-1, perspective view.

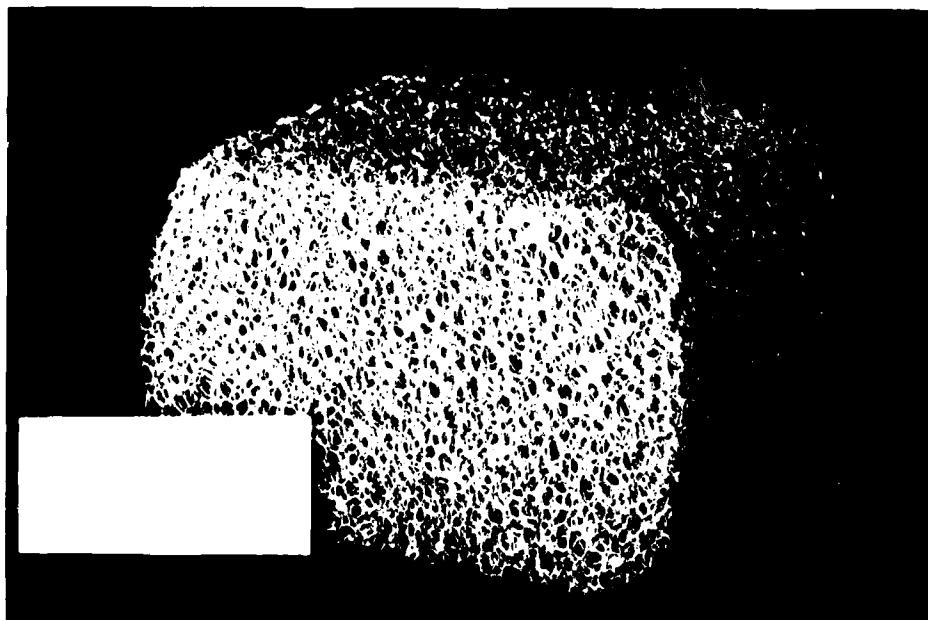


Figure A1-23. Sample 9-5-1, cross-sectional view.

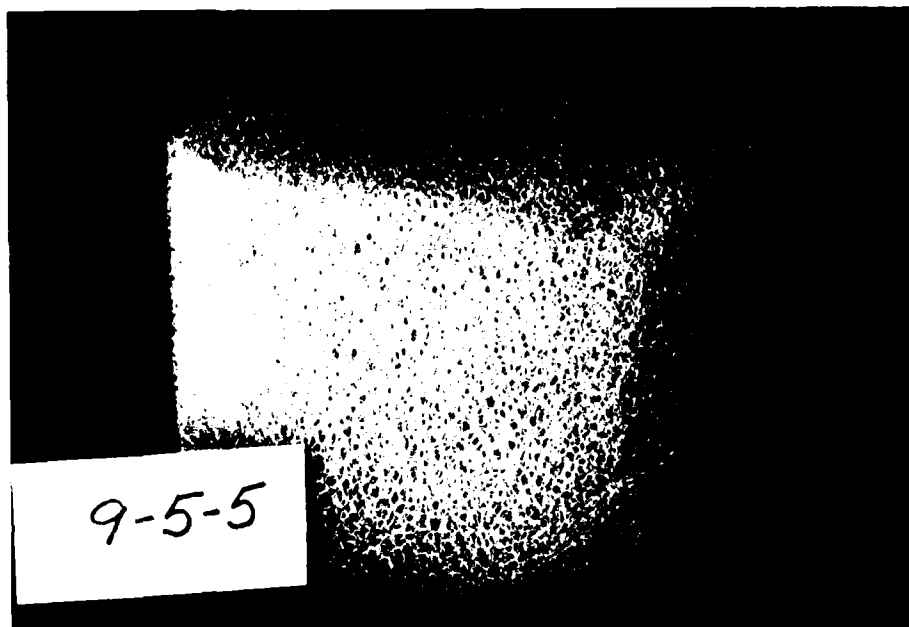


Figure A1-20. Cross-sectional view of blue, red, and yellow foam specimens, subjected to accelerated aging in JP-5 for five weeks.

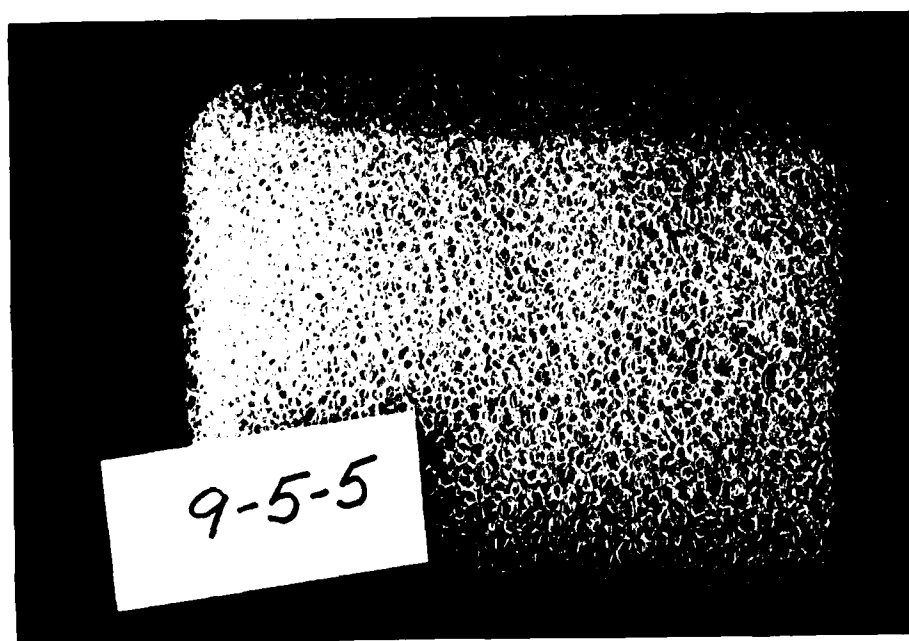


Figure A1-21. Specimens of blue foam, subjected to accelerated aging in JP-5 at 200°F (93°C) for one to five weeks.

A1.3. FIGURES DEPICTING FOAM SAMPLES FROM
ACCELERATED AGING TESTS IN JP-5

Foam sample identifications, from aging test in JP-5, are listed
in Table A1-2.

TABLE A1-2. CODE FOR FOAM SPECIMENS PRODUCED BY
ACCELERATED AGING TESTS IN JP-5^a

Foam	Sample size, in.	Exposure time, weeks				
		1	2	3	4	5
Blue, dry, new	3x3x2	9-1-1	9-2-1	9-3-1	9-4-1	9-5-1
	3x3x2	9-1-2	9-2-2	9-3-2	9-4-2	9-5-2
	3x3x2	9-1-3	9-2-3	9-3-3	9-4-3	9-5-3
	3x3x2	9-1-4	9-2-4	9-3-4	9-4-4	9-5-4
Red, dry, new	3x3x2	9-1-5	9-2-5	9-3-5	9-4-5	9-5-5
	3x3x2	9-1-6	9-2-6	9-3-6	9-4-6	9-5-6
Yellow, dry, new	3x3x2	9-1-7	9-2-7	9-3-7	9-4-7	9-5-7
	3x3x2	9-1-8	9-2-8	9-3-8	9-4-8	9-5-8

^aSamples were tested at 200°F (93°C).

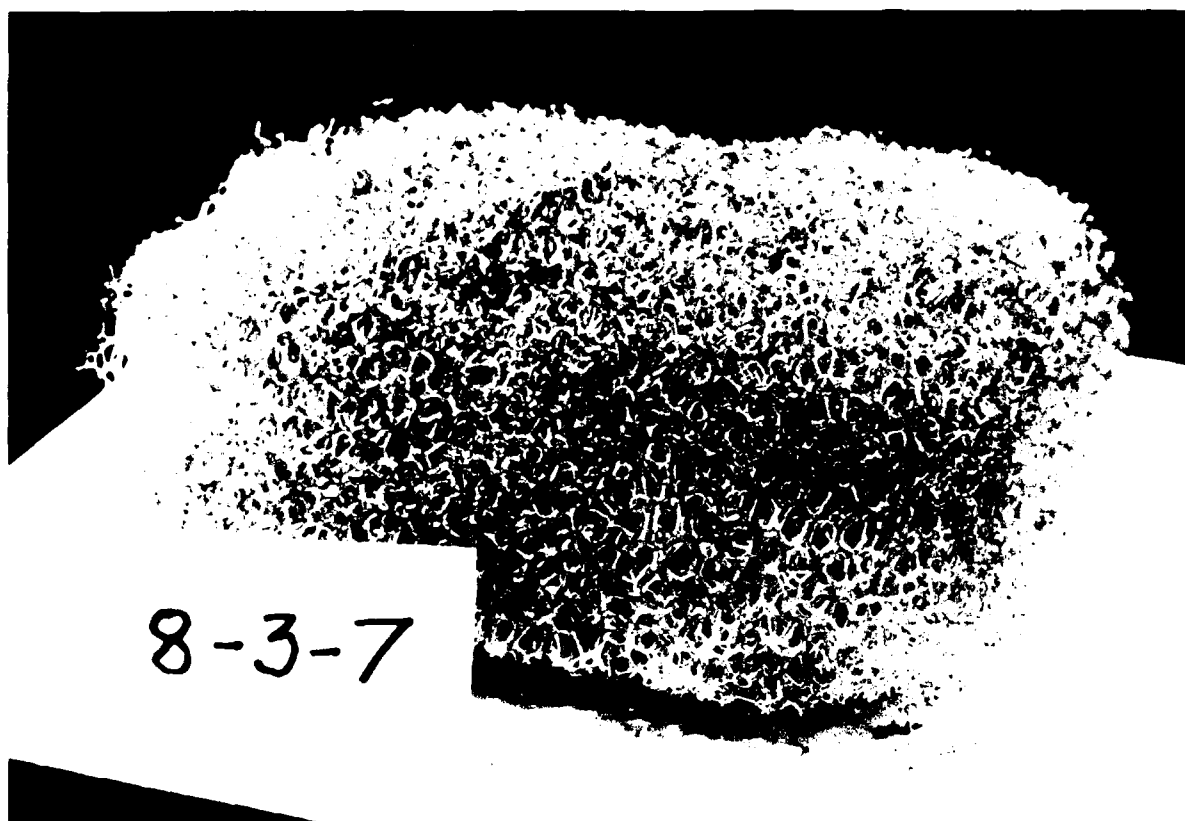


Figure A1-19. Yellow foam specimen 8-3-7, after three weeks of accelerated aging in air at 200°F (93°C).



Figure A1-17. Sample 8-2-7, perspective view.

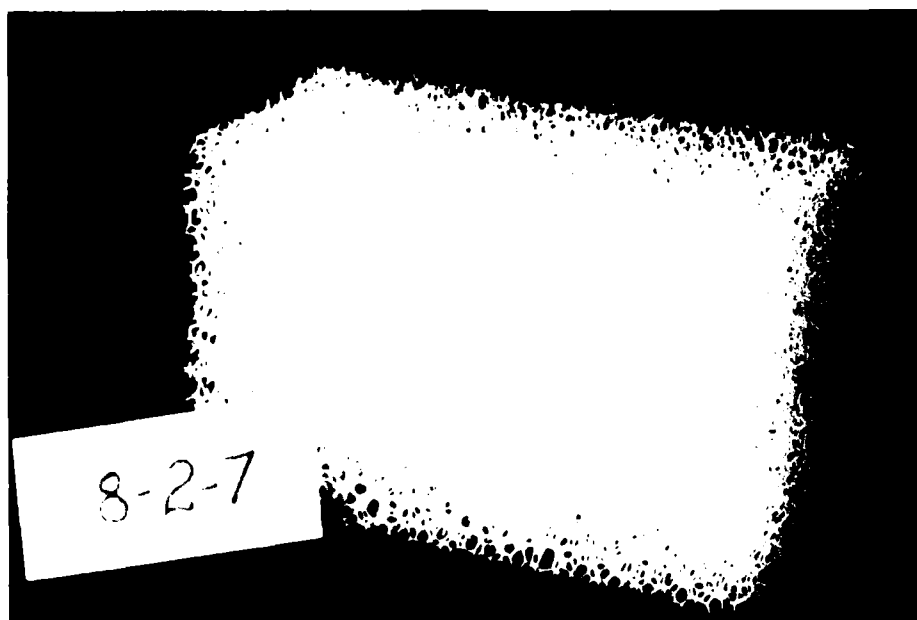


Figure A1-18. Sample 8-2-7, cross-sectional view.

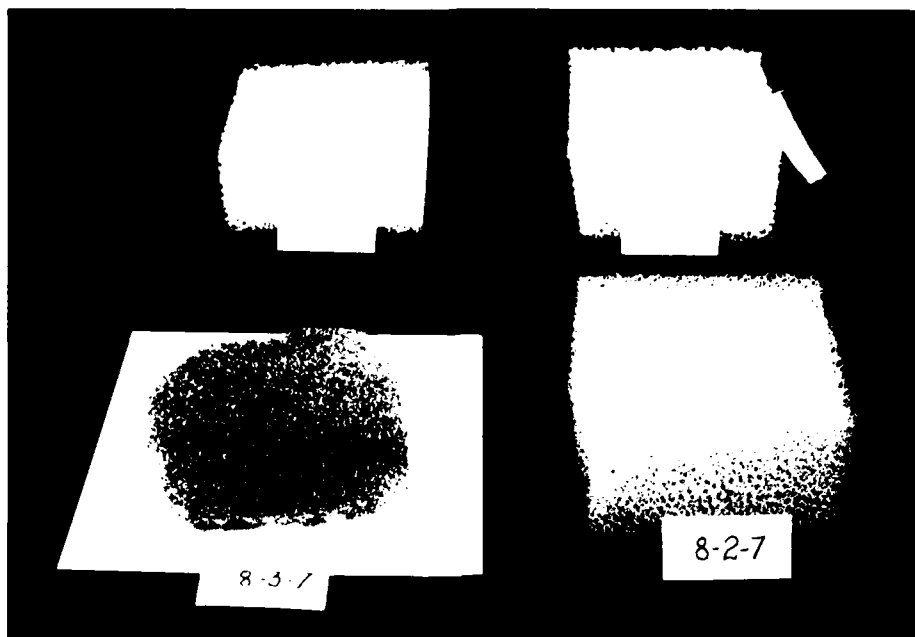


Figure A1-15. Specimens of yellow foam, subjected to accelerated aging in air at 200°F (93°C) for one to three weeks.

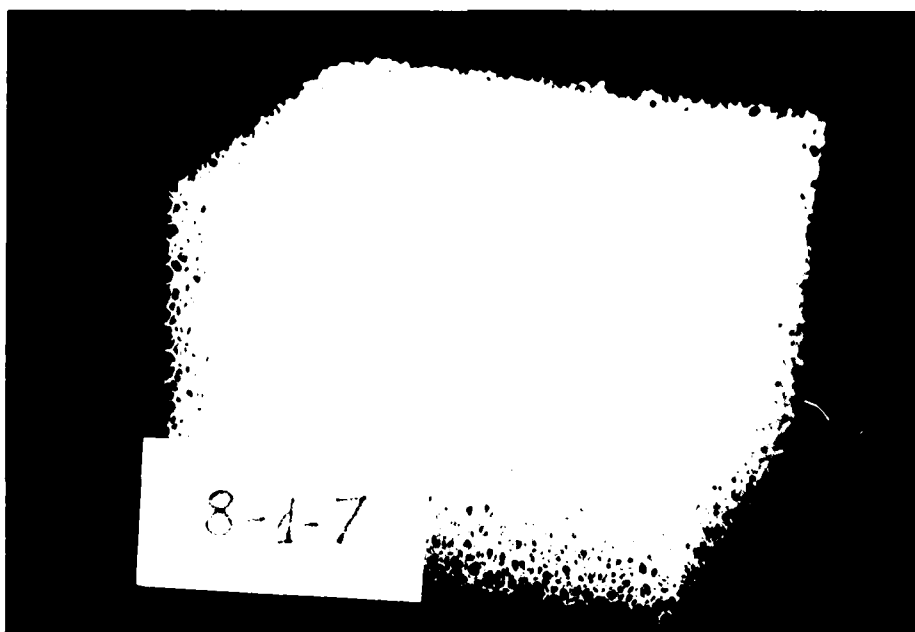


Figure A1-16. Sample 8-1-7, perspective view.

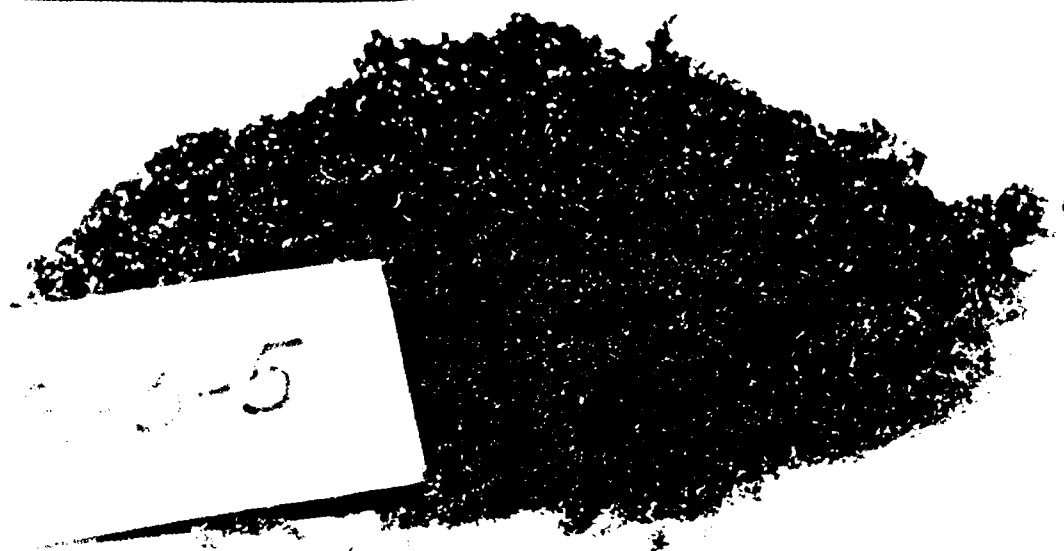


Figure A1-14. Red foam specimen 8-3-5, after three weeks of accelerated aging in air at 200°F (93°C).

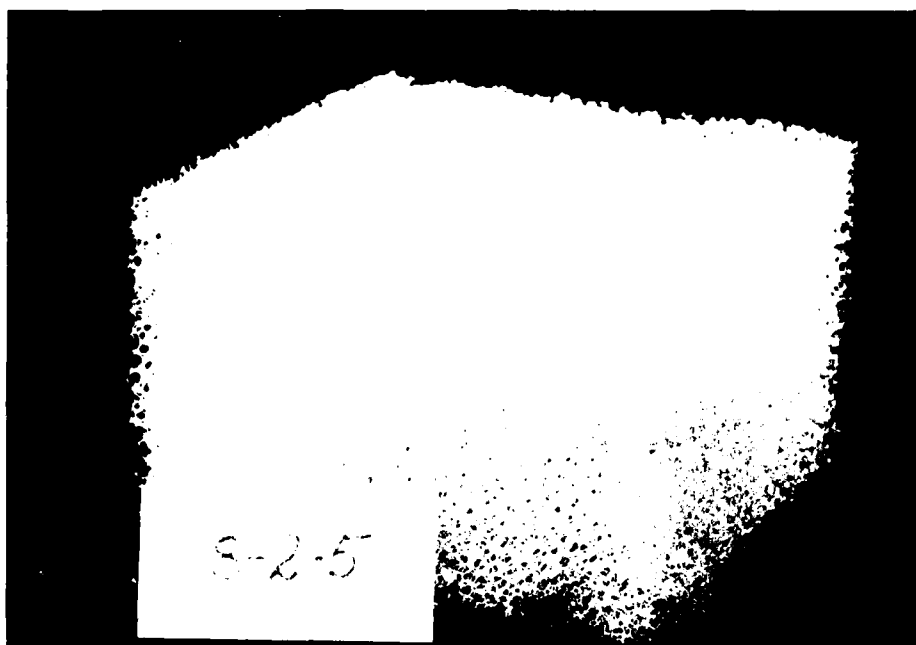


Figure A1-12. Sample 8-2-5, perspective view.

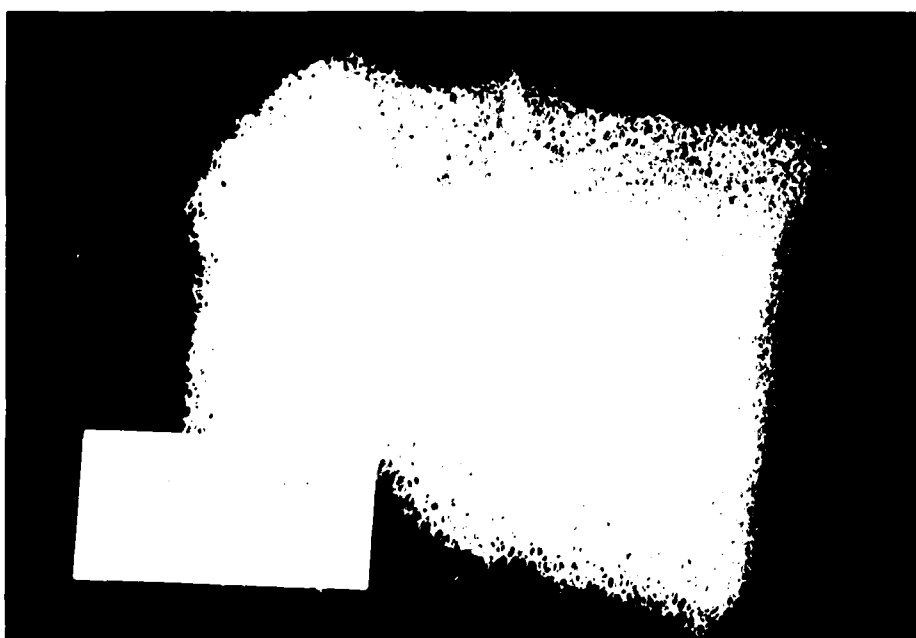


Figure A1-13. Sample 8-2-5, cross-sectional view.

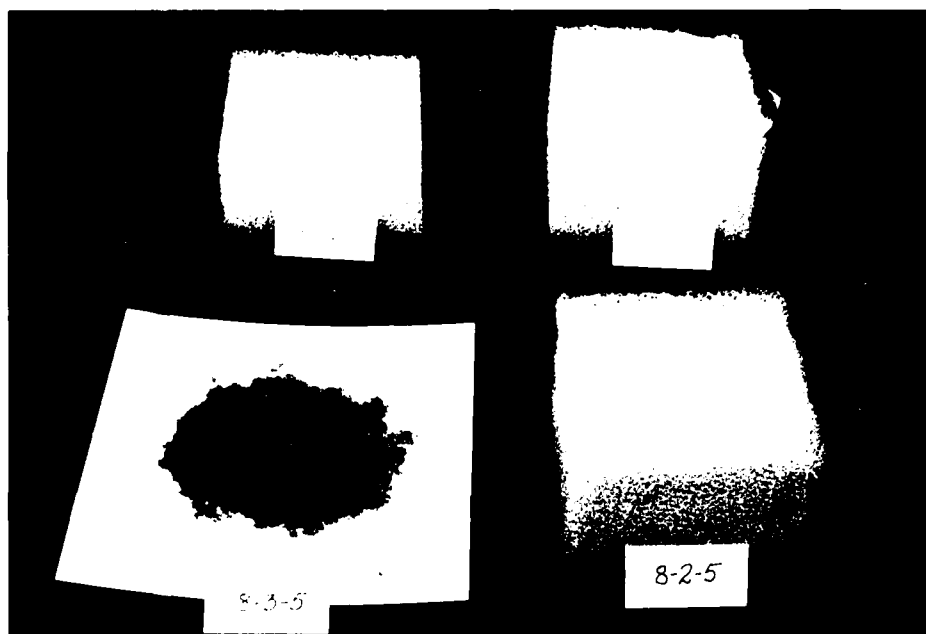


Figure A1-10. Specimens of red foam, subjected to accelerated aging in air at 200°F (93°C) for one to three weeks.

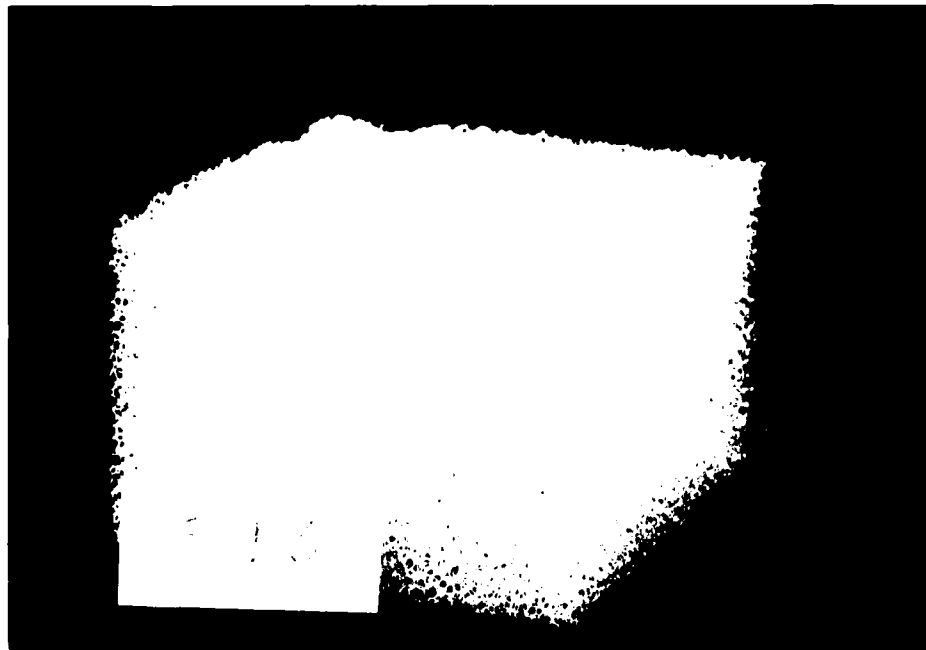


Figure A1-11. Sample 8-1-5, perspective view.



Figure A1-8. Sample 8-5-1, perspective view.

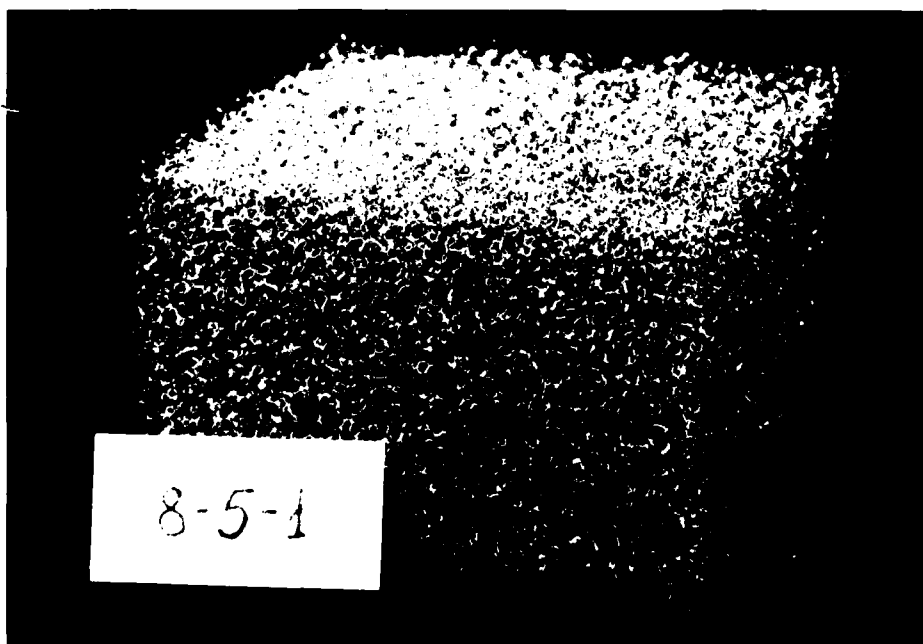


Figure A1-9. Sample 8-5-1, cross-sectional view.

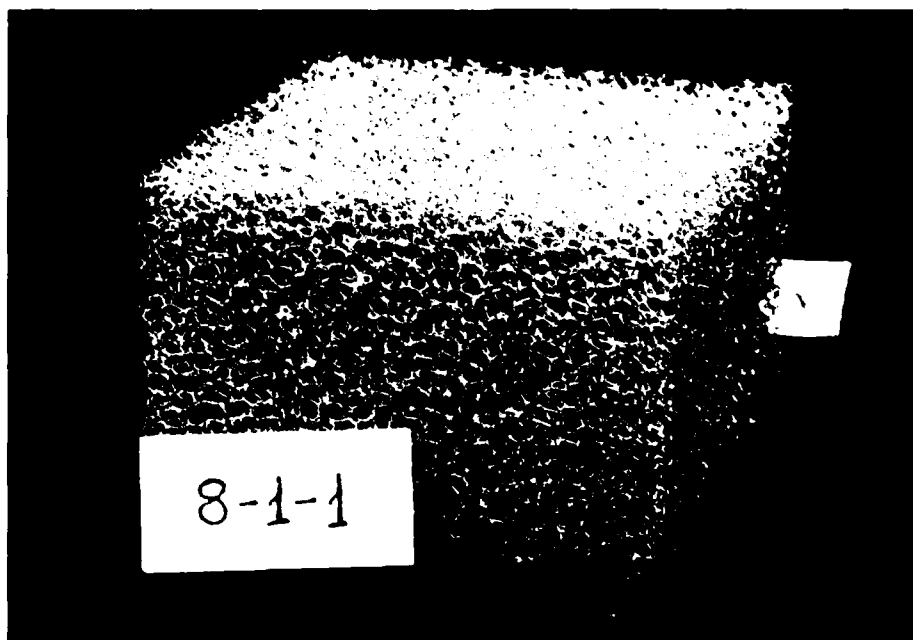


Figure A1-6. Sample 8-1-1, perspective view.

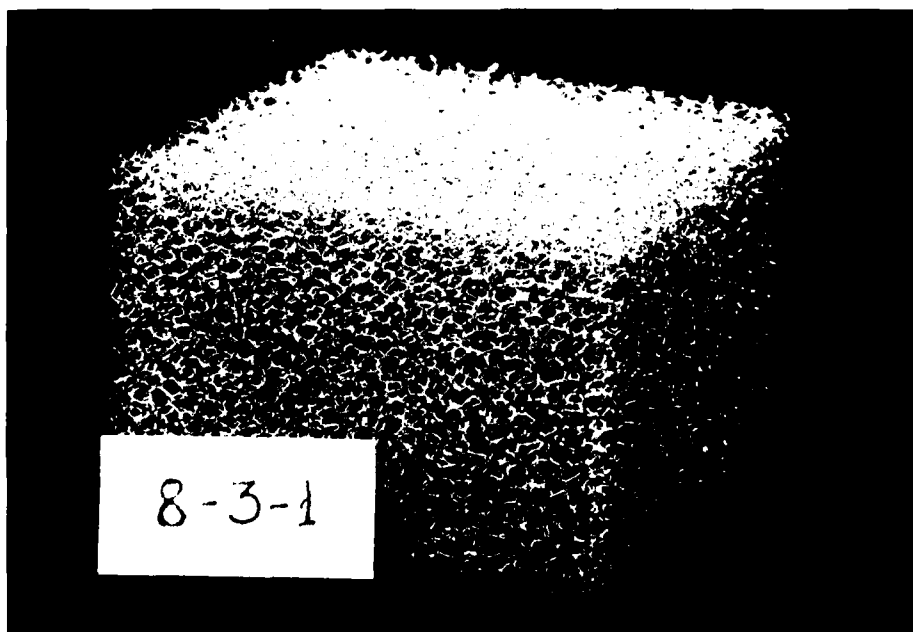


Figure A1-7. Sample 8-3-1, perspective view.

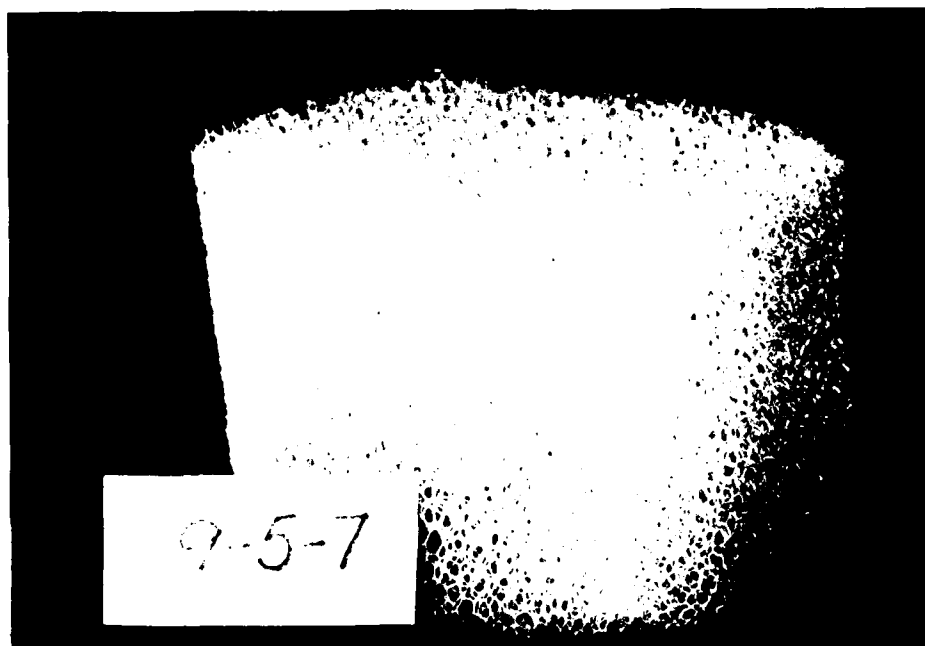


Figure A1-28. Sample 9-5-7, perspective view.

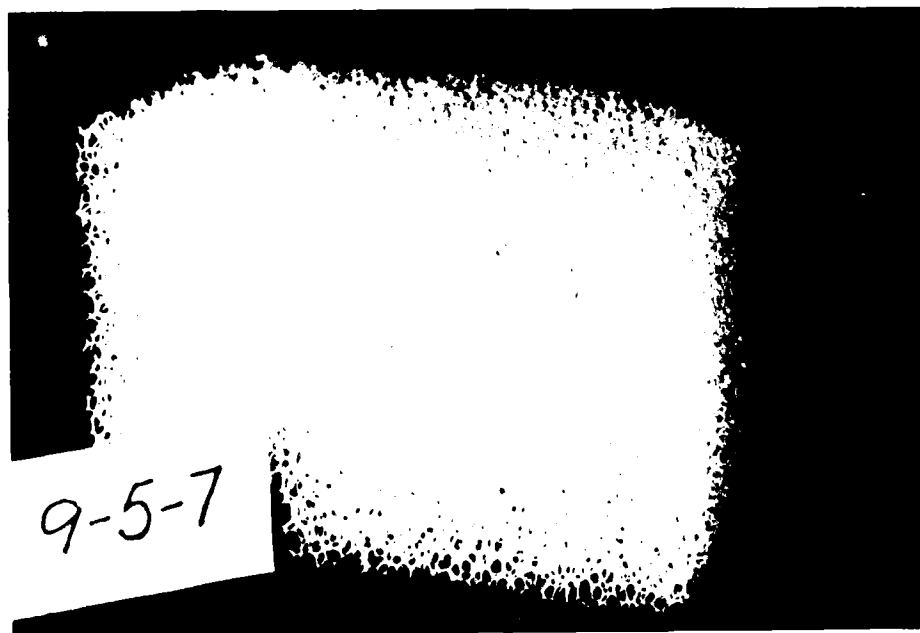


Figure A1-29. Sample 9-5-7, cross-sectional view.

A1.4. FIGURES DEPICTING FOAM SAMPLES FROM
SIMULATED SUNLIGHT EXPOSURE TEST

Identifications of samples, subjected to simulated sunlight exposure, are shown in Table A1-3.

TABLE A1-3. CODE FOR SPECIMENS PRODUCED BY SIMULATED
SUNLIGHT EXPOSURE OF FOAM

Foam	Sample size, in.	Exposure time, hours				
		40	80	120	160	200
Blue, dry, new	3x3x2	7-1-1	7-2-1	7-3-1	7-4-1	7-5-1
	3x3x2	7-1-2	7-2-2	7-3-2	7-4-2	7-5-2
	3x3x2	7-1-3	7-2-3	7-3-3	7-4-3	7-5-3
	3x3x2	7-1-4	7-2-4	7-3-4	7-4-4	7-5-4
Red, dry, new	3x3x2	7-1-5	7-2-5	7-3-5	7-4-5	7-5-5
	3x3x2	7-1-6	7-2-6	7-3-6	7-4-6	7-5-6
Yellow, dry, new	3x3x2	7-1-7	7-2-7	7-3-7	7-4-7	7-5-7
	3x3x2	7-1-8	7-2-8	7-3-8	7-4-8	7-5-8

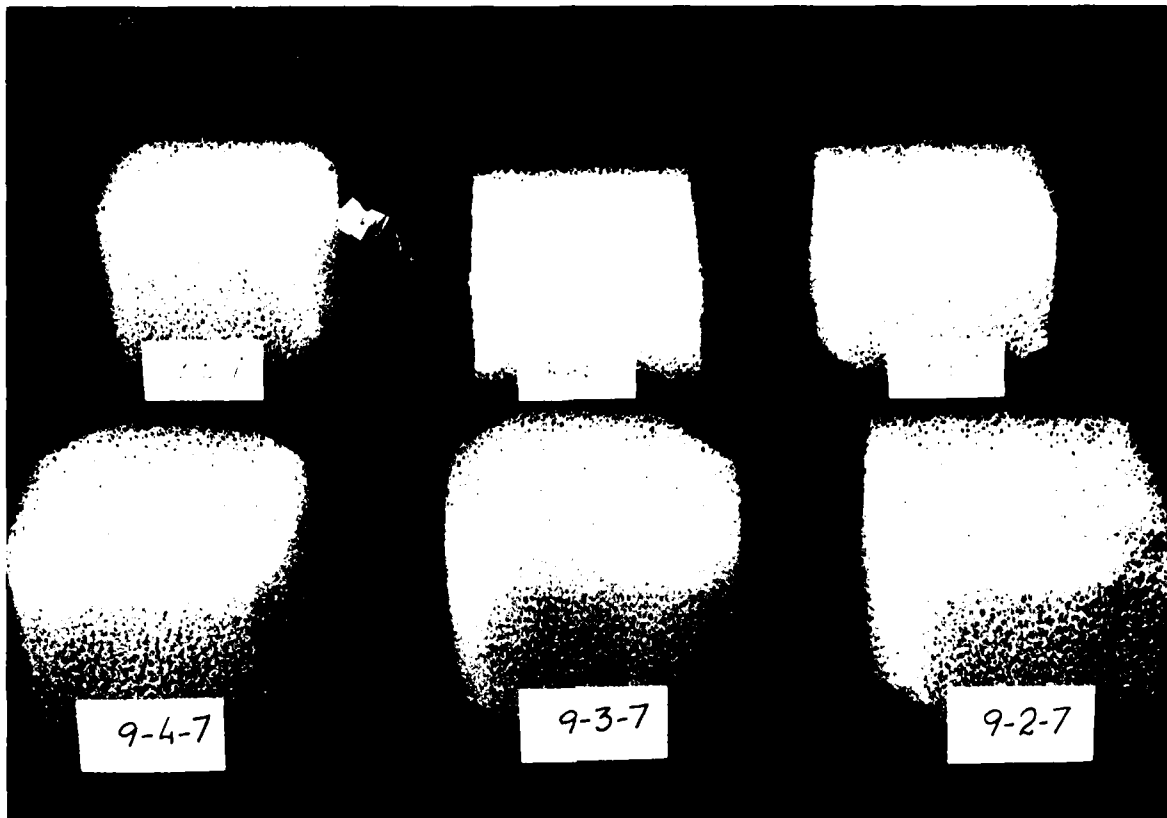


Figure A1-30. Cross-sectional view of blue, red, and yellow foam specimens, subjected to 200 hours of simulated sunlight exposure.

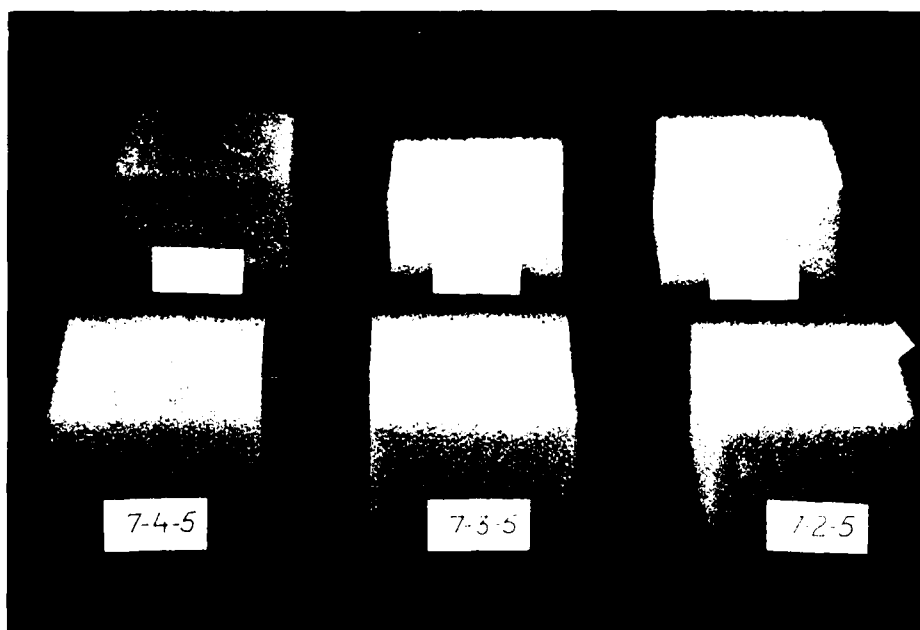


Figure A1-31. Specimens of blue foam, subjected to 40-200 hours of simulated sunlight exposure.

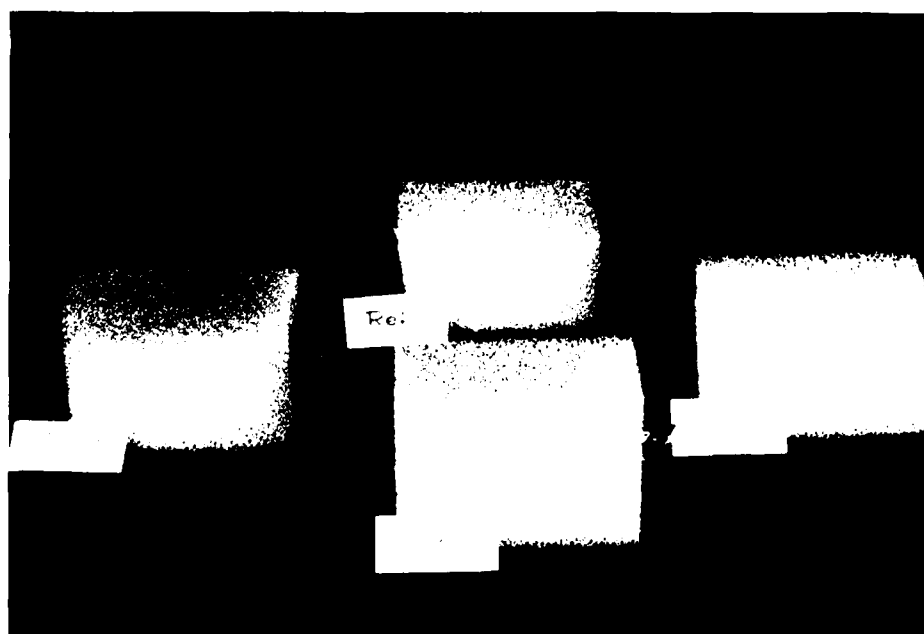


Figure A1-32. Cross-sectional view of blue foam specimens, subjected to 40, 120, and 200 hours of simulated sunlight exposure.

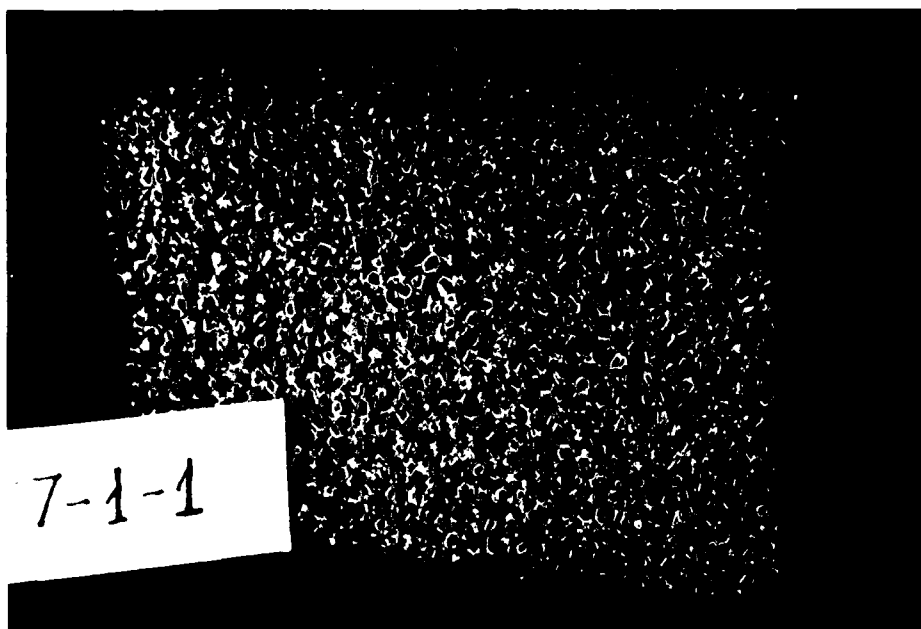


Figure A1-33. Sample 7-1-1, cross-sectional view.

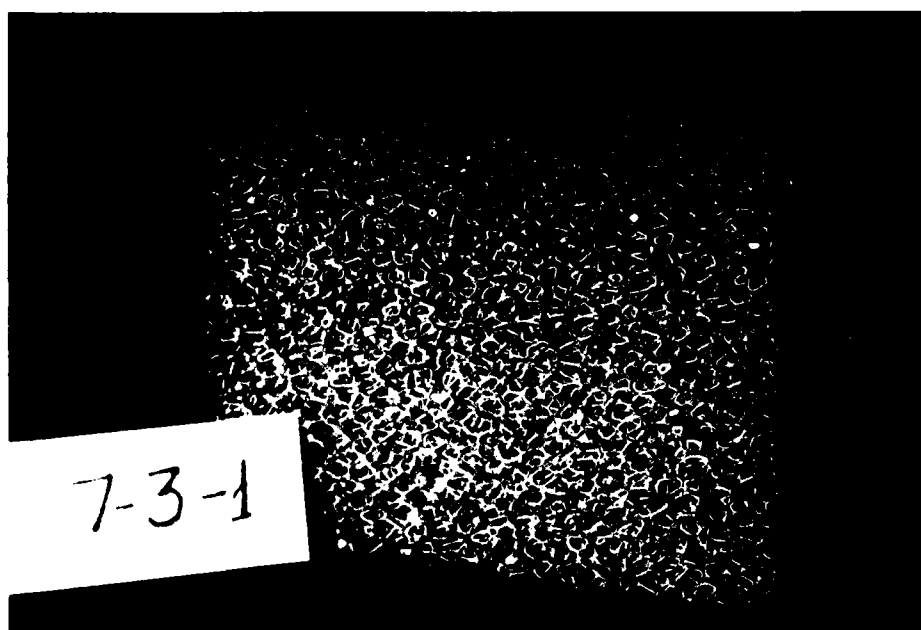


Figure A1-34. Sample 7-3-1, cross-sectional view.

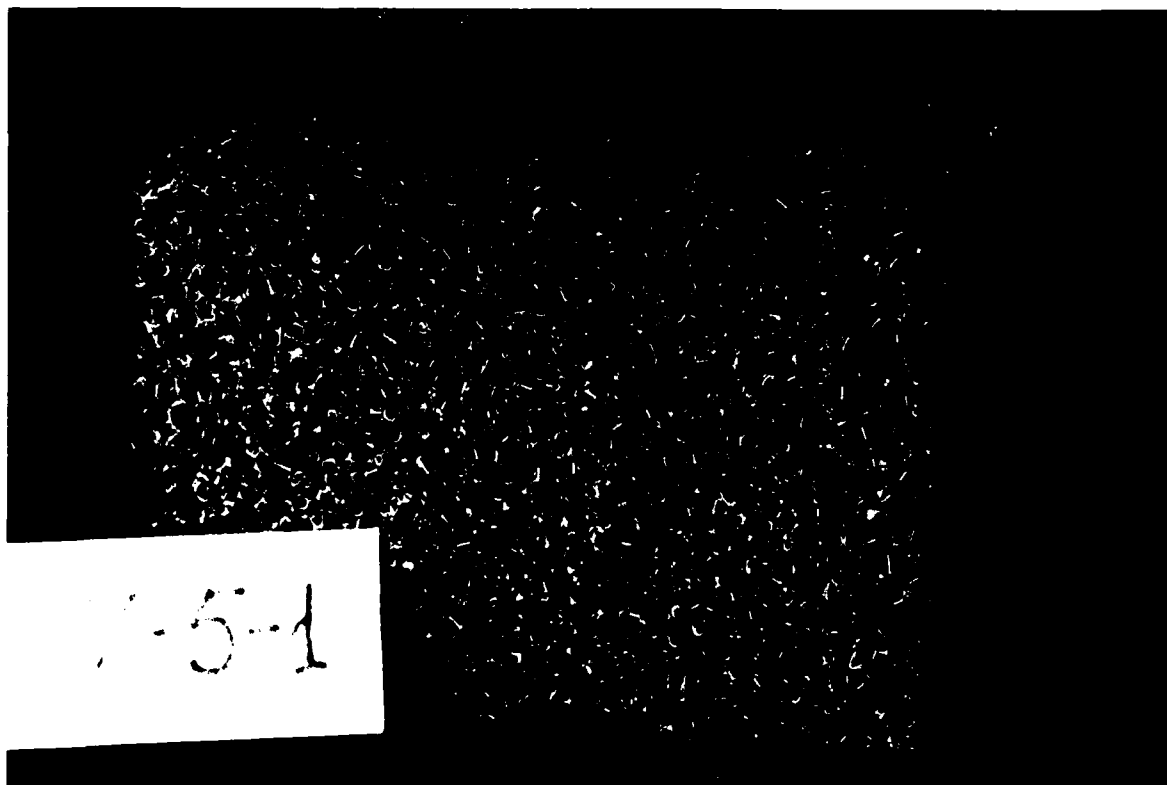


Figure A1-35. Sample 7-5-1, cross-sectional view.

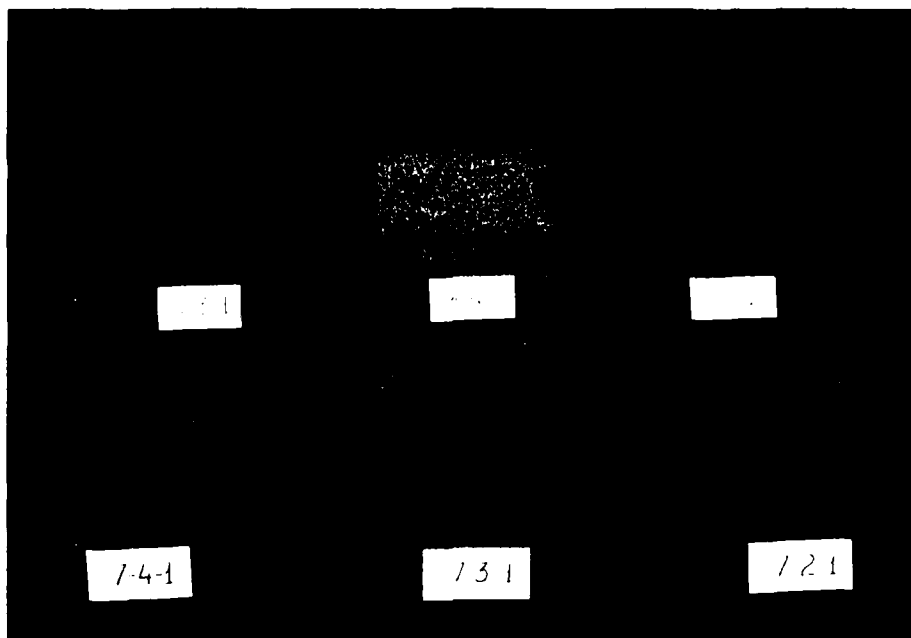


Figure A1-36. Specimens of red foam, subjected to 40-200 hours of simulated sunlight exposure.

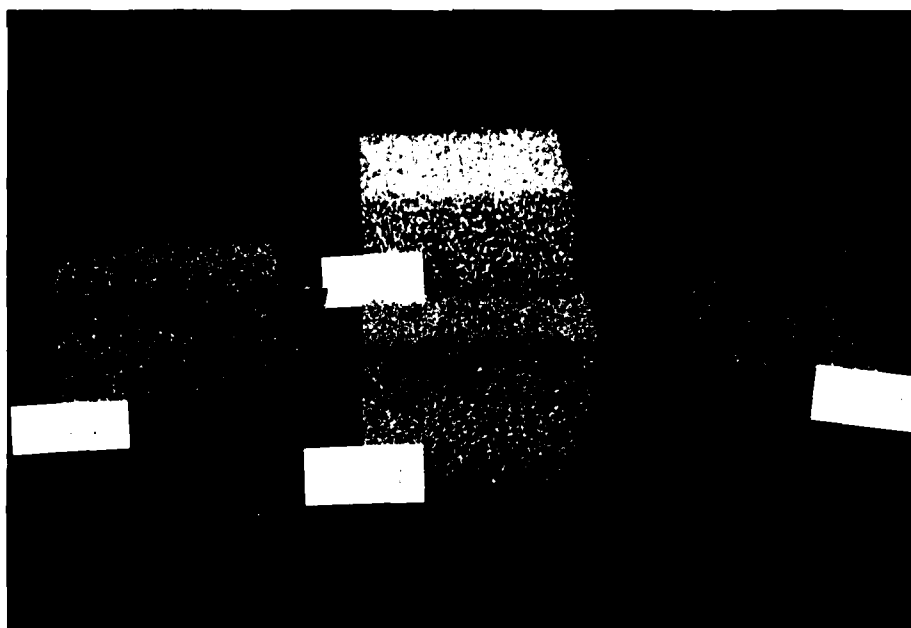


Figure A1-37. Cross-sectional view of red foam specimens, subjected to 40, 120, and 200 hours of simulated sunlight exposure.

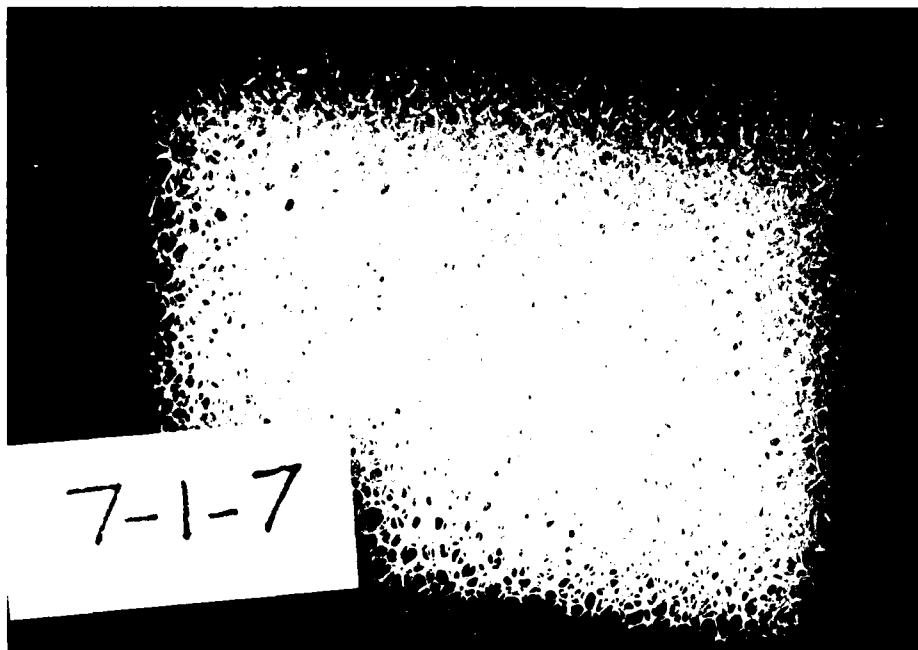


Figure A1-38. Sample 7-1-5, cross-sectional view.

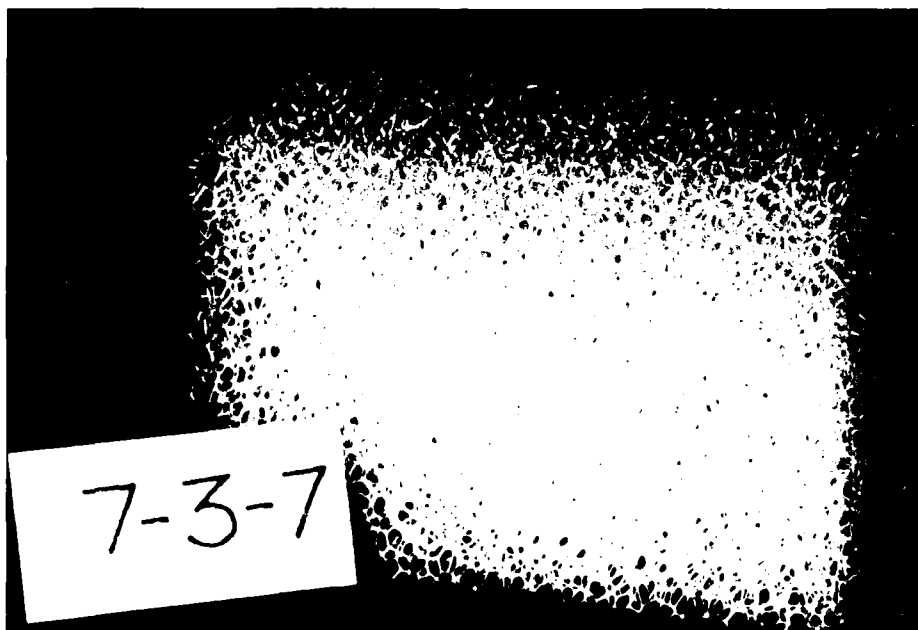


Figure A1-39. Sample 7-3-5, cross-sectional view.

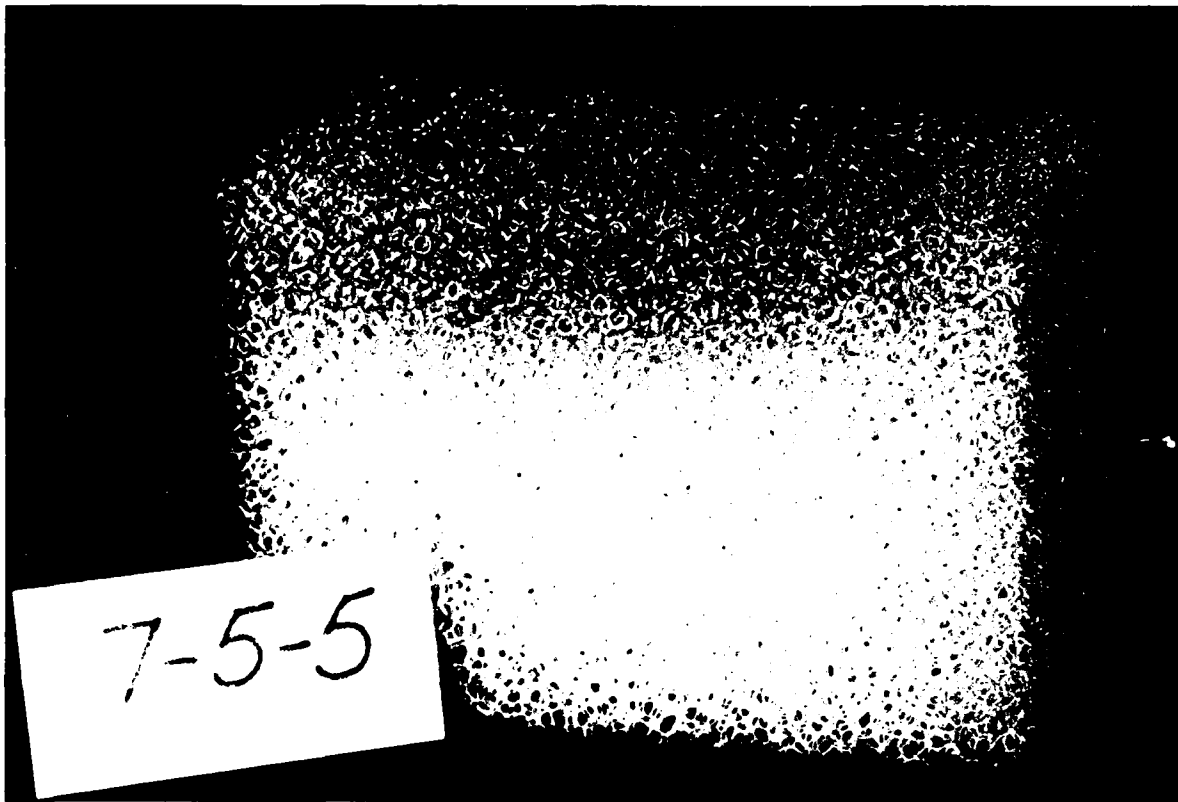


Figure A1-40. Sample 7-5-5, cross-sectional view.

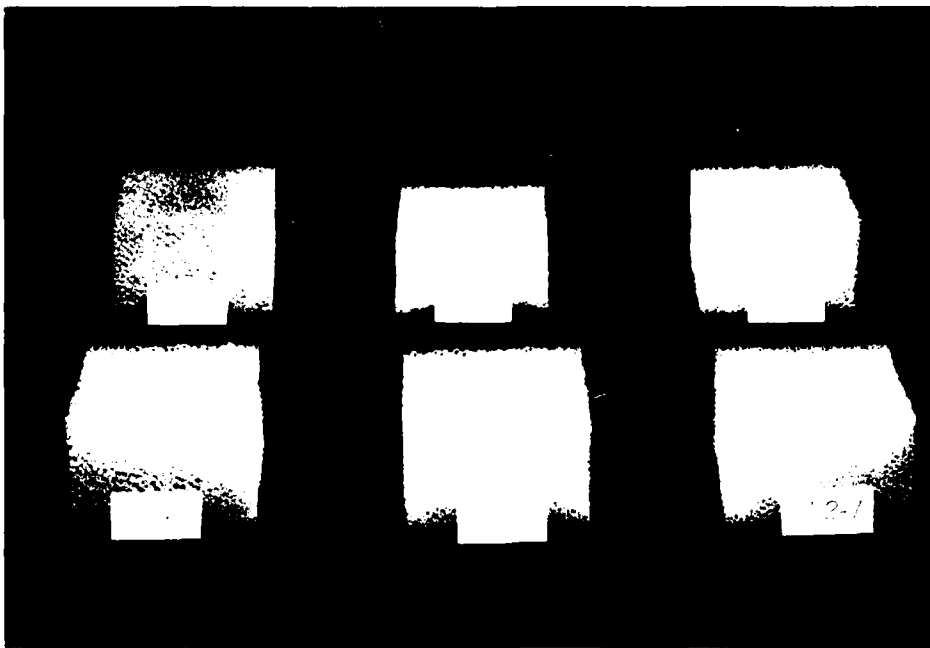


Figure A1-41. Specimens of yellow foam, subjected to 40-200 hours of simulated sunlight exposure.

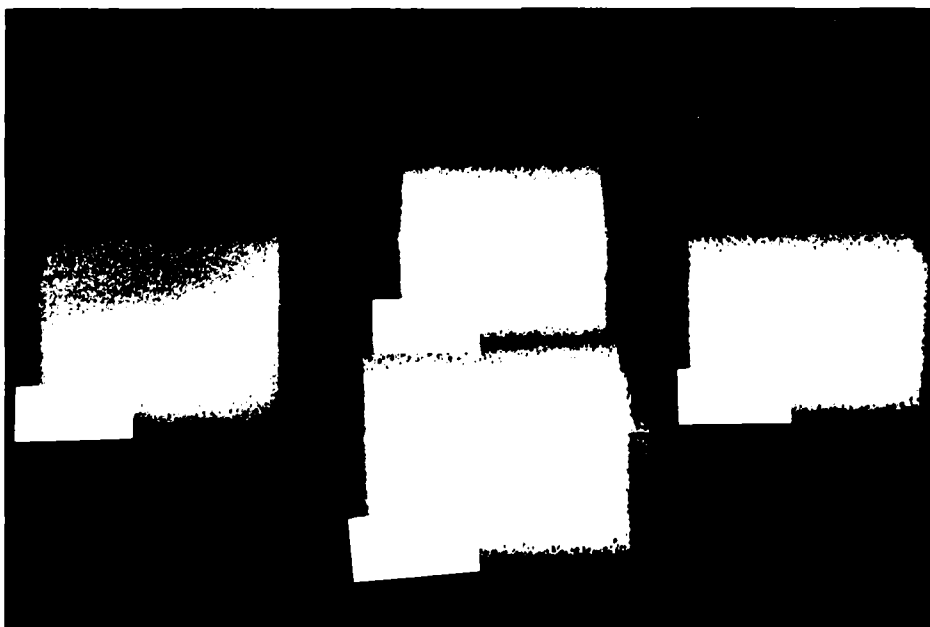


Figure A1-42. Cross-sectional view of yellow foam specimens, subjected to 40, 120, and 200 hours of simulated sunlight exposure.

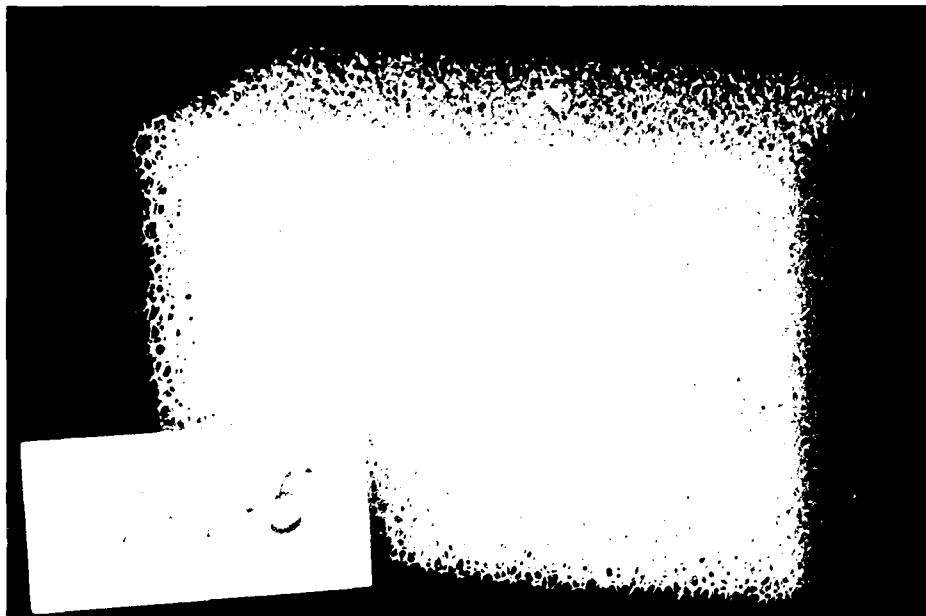


Figure A1-43. Sample 7-1-7, cross-sectional view.

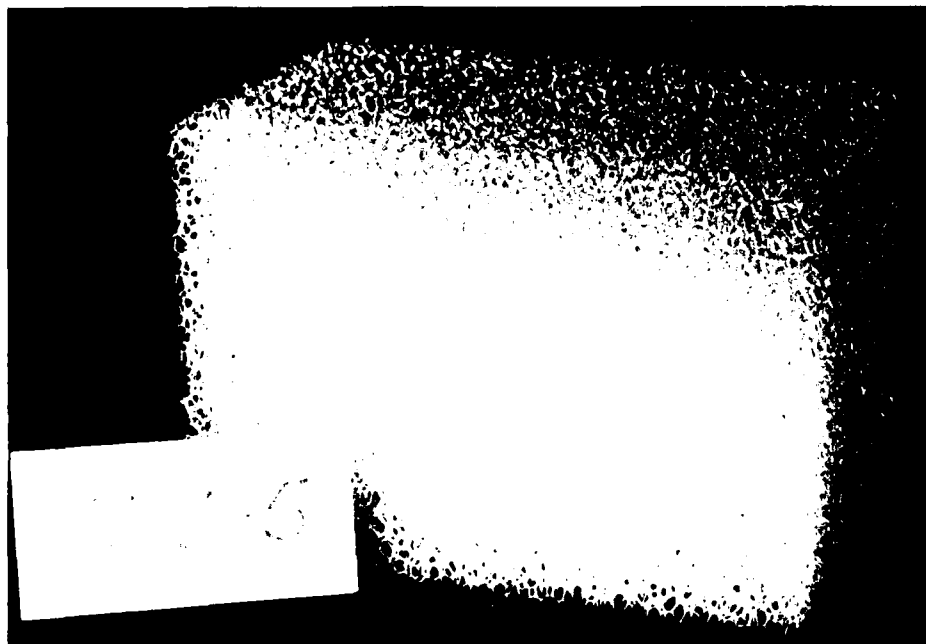


Figure A1-44. Sample 7-3-7, cross-sectional view.



Figure A1-45. Sample 7-5-7, cross-sectional view.

A1-5. FIGURES DEPICTING FOAM SAMPLES FROM
HOT WIRE CUTTING EXPERIMENTS

Identification code for samples produced in hot wire cutting experiments is presented in the table below.

TABLE A1-4. CODE FOR FOAM SPECIMENS PRODUCED BY HOT WIRE CUTTING

Foam	Sample size, in. ^a	Cutting speed, ft/min		
		10	5	2.5
Blue, dry, new	12x12x2	2-1-1	2-2-1	2-3-1
Red, dry, new	12x12x2	2-1-2	2-2-2	2-3-2
Yellow, dry, new	12x12x2	2-1-3	2-2-3	2-3-3

^aSize after hot wire cutting.

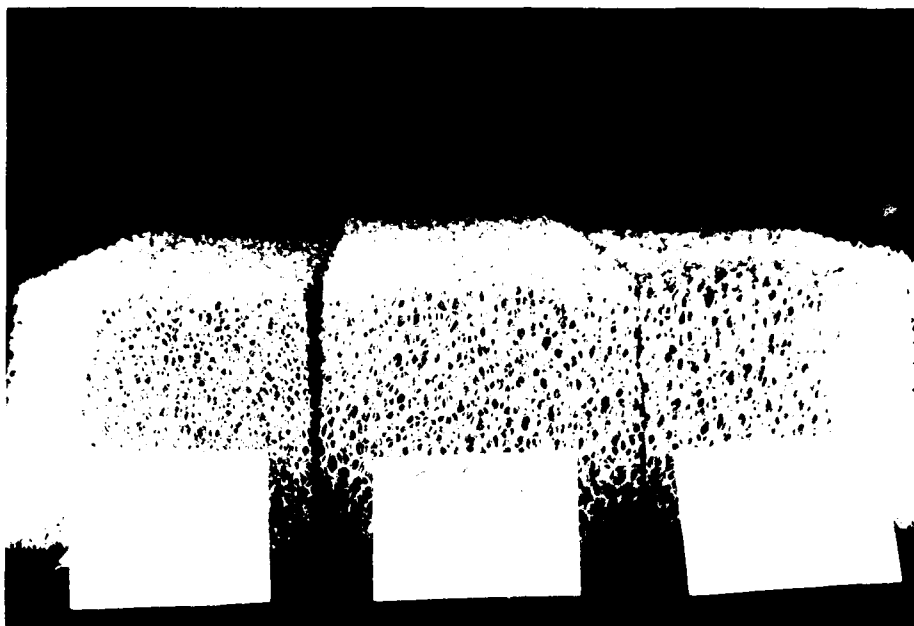


Figure A1-46. Specimens of blue foam, cut along the upper surface at 10, 5, and 2.5 ft/min, respectively.

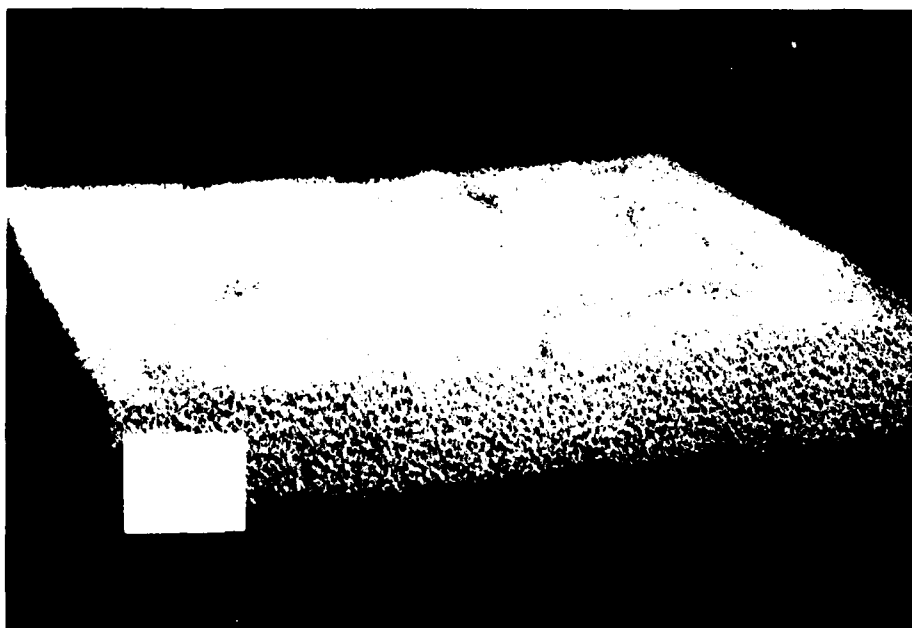


Figure A1-47. Sample 2-3-1, perspective view.

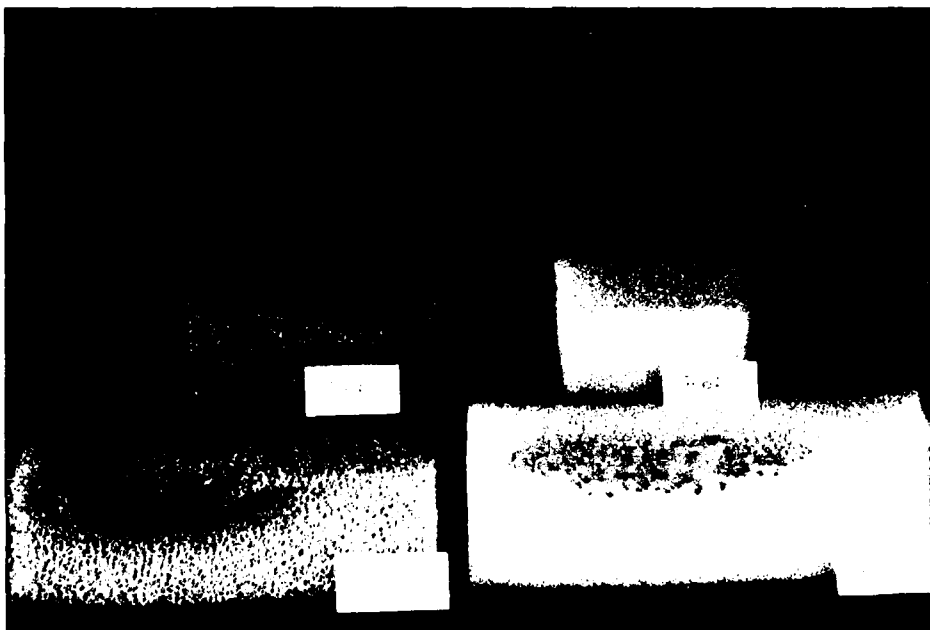


Figure A1-69. Cross-sectional view of blue and red foam specimens, subjected to radiant heat exposure for 10 seconds.

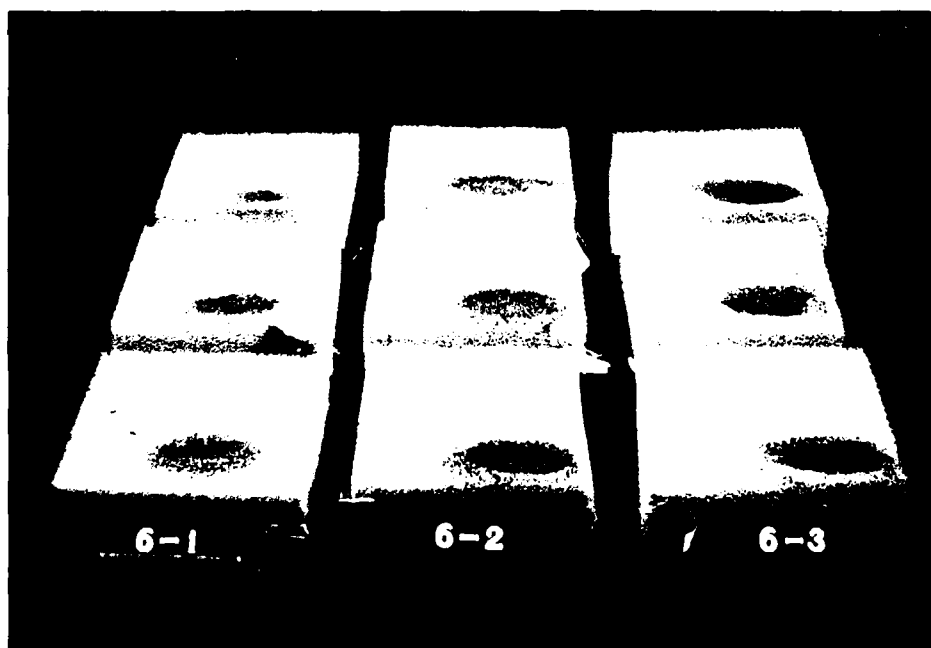


Figure A1-70. Perspective view of blue foam specimens, subjected to radiant heat exposure for 10, 20, and 30 seconds, respectively.

A1.7. FIGURES DEPICTING FOAM SAMPLES FROM
RADIANT HEAT EXPOSURE EXPERIMENTS

Samples from radiant heat exposure experiments are identified in
Table A1-6.

TABLE A1-6. CODE FOR FOAM SPECIMENS PRODUCED
BY RADIANT HEAT EXPOSURE

Foam	Sample size, in.	Exposure time, sec		
		10	15	20
Blue, dry, new	6x6x2	6-1-1	6-2-1	6-3-1
	6x6x2	6-1-2	6-2-2	6-3-2
	6x6x2	6-1-3	6-2-3	6-3-3
Blue, dry, aged	3x3x2	6-1-4 ^a		
Red, dry, new	6x6x2	6-1-7	6-2-7	6-3-7
	6x6x2	6-1-8	6-2-8	6-3-8
	6x6x2	6-1-9	6-2-9	6-3-9

^aThis sample had been subjected to accelerated
aging in air at 200°F (93°C) for five weeks.

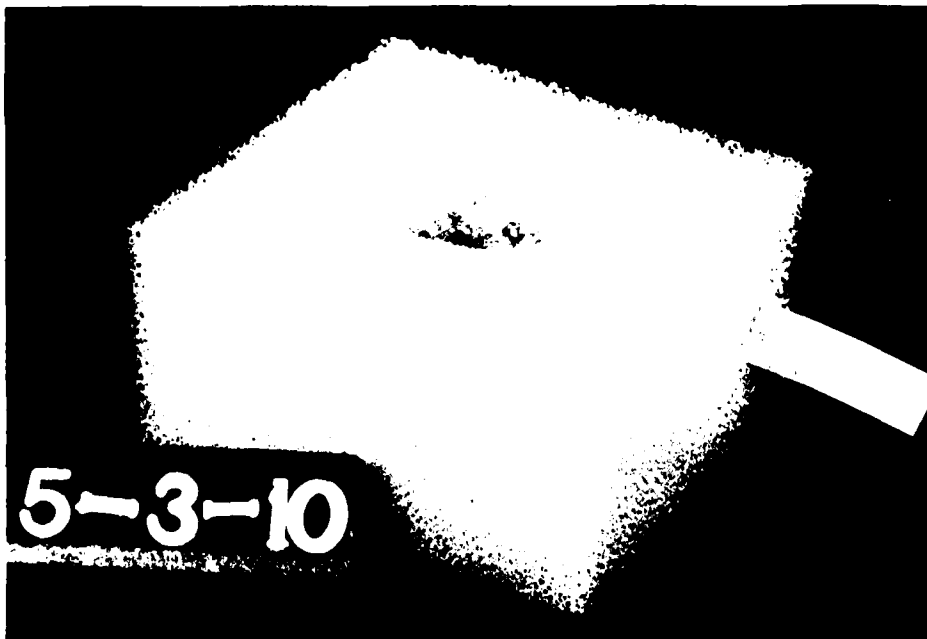


Figure A1-67. Sample 5-3-10, perspective view.

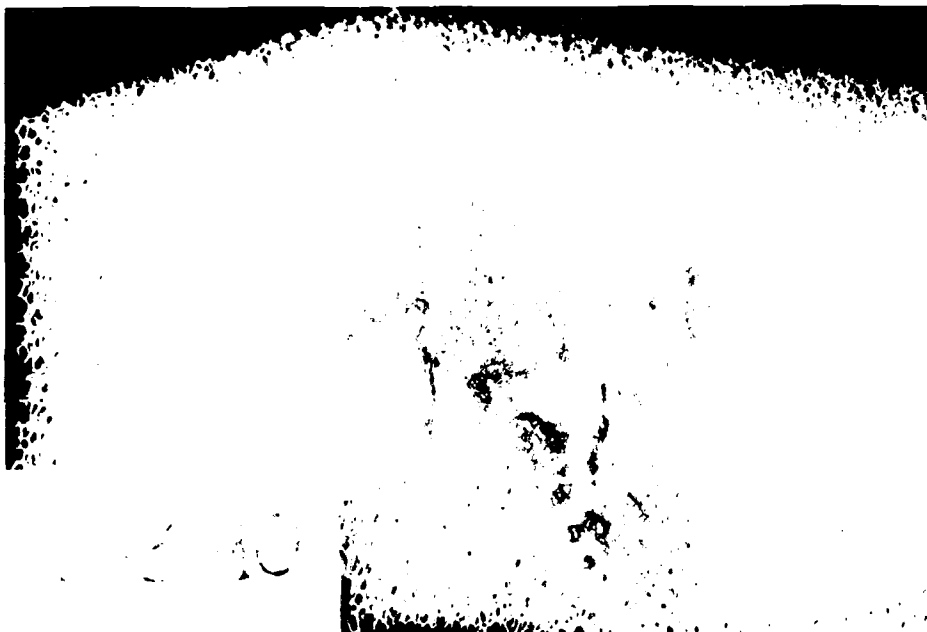


Figure A1-68. Sample 5-3-10, cross-sectional view.

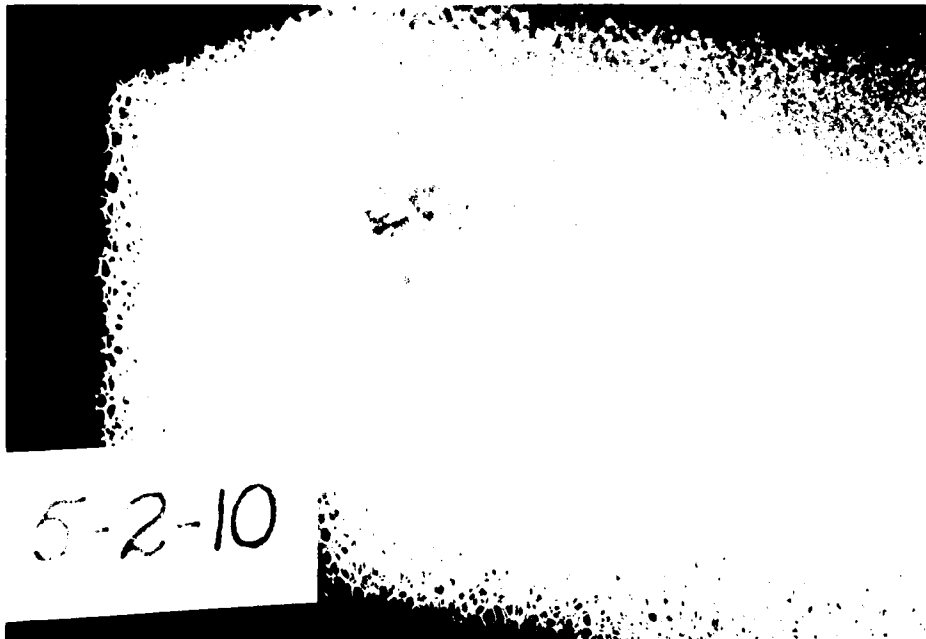


Figure A1-65. Sample 5-2-10, perspective view.

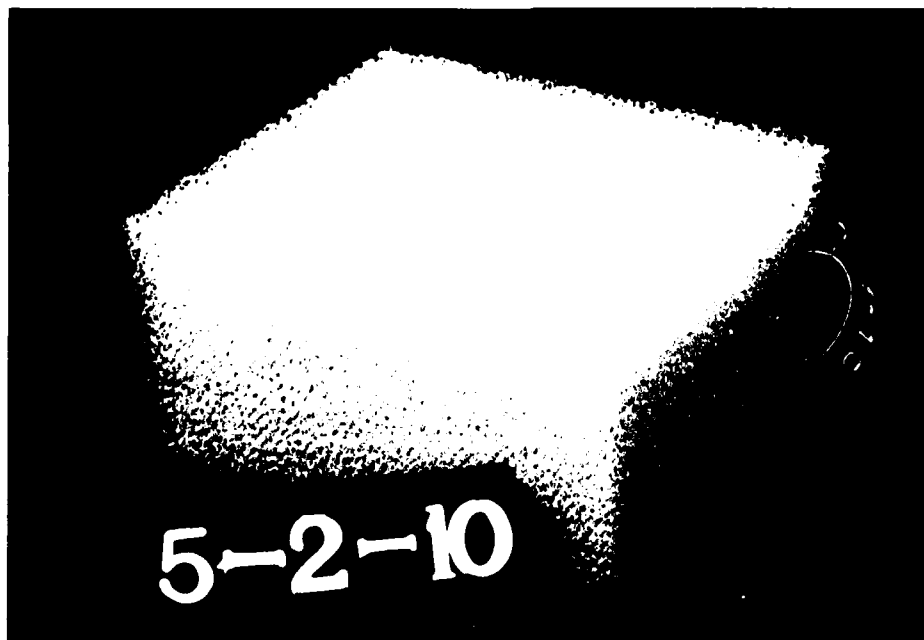


Figure A1-66. Sample 5-2-11, cross-sectional view.

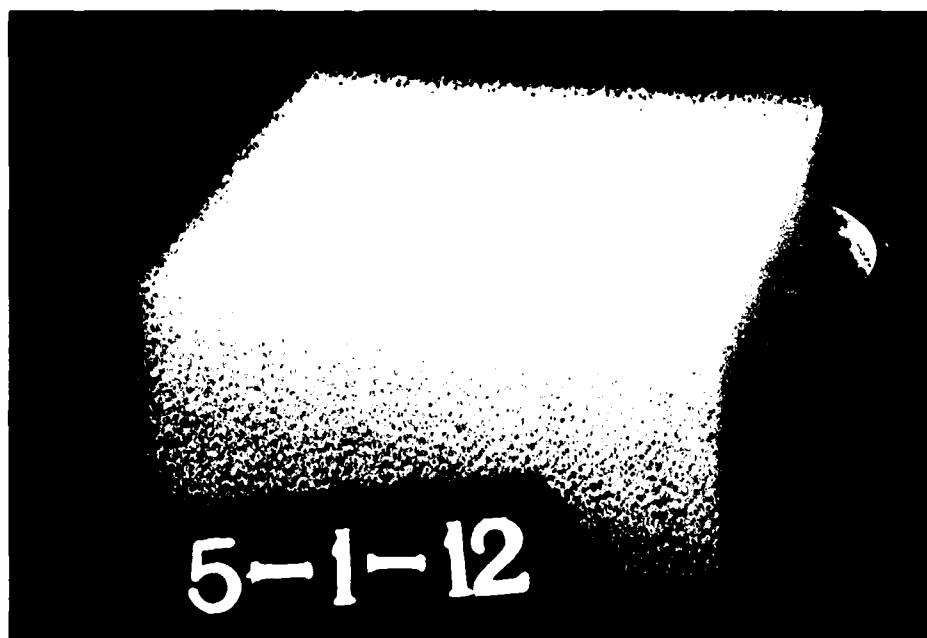


Figure A1-63. Sample 5-1-12, perspective view.

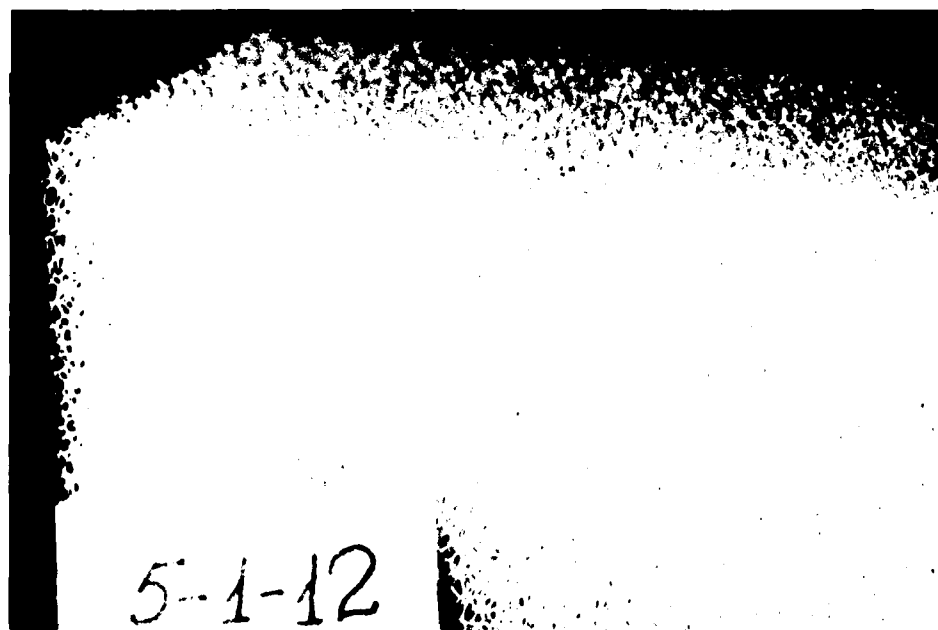


Figure A1-64. Sample 5-1-12, cross-sectional view.

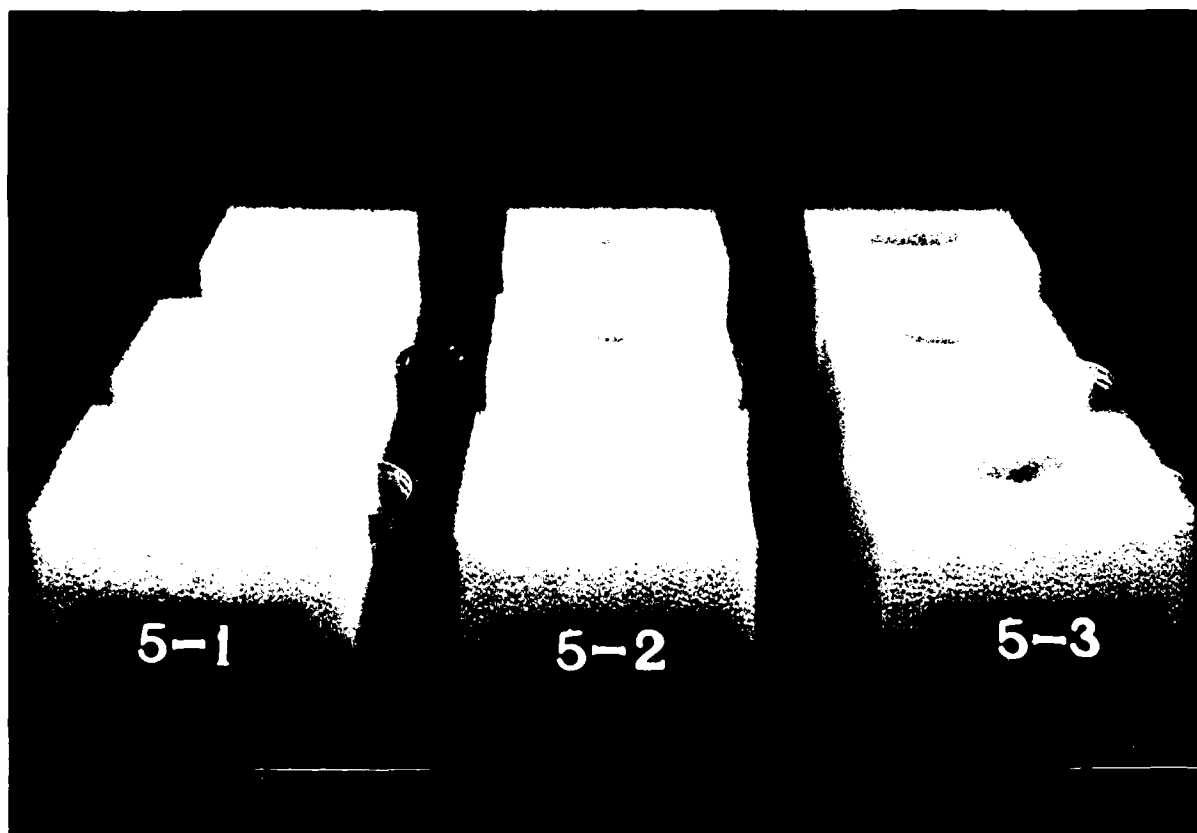


Figure A1-62. Perspective view of red foam specimens, subjected to hot air impingement for ~2, ~3.5, and ~5 seconds, respectively.

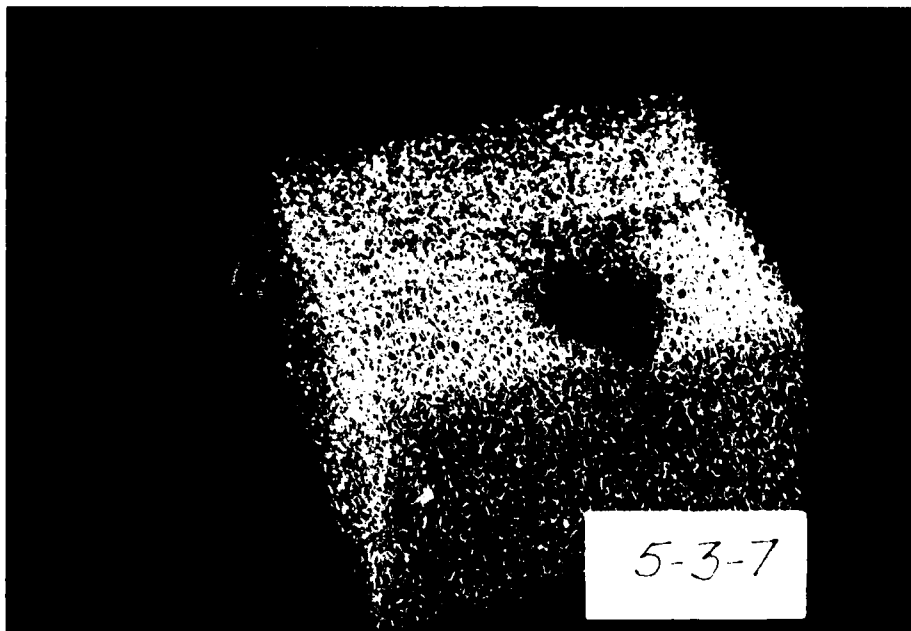


Figure A1-60. Sample 5-3-7 (aged foam), perspective view.

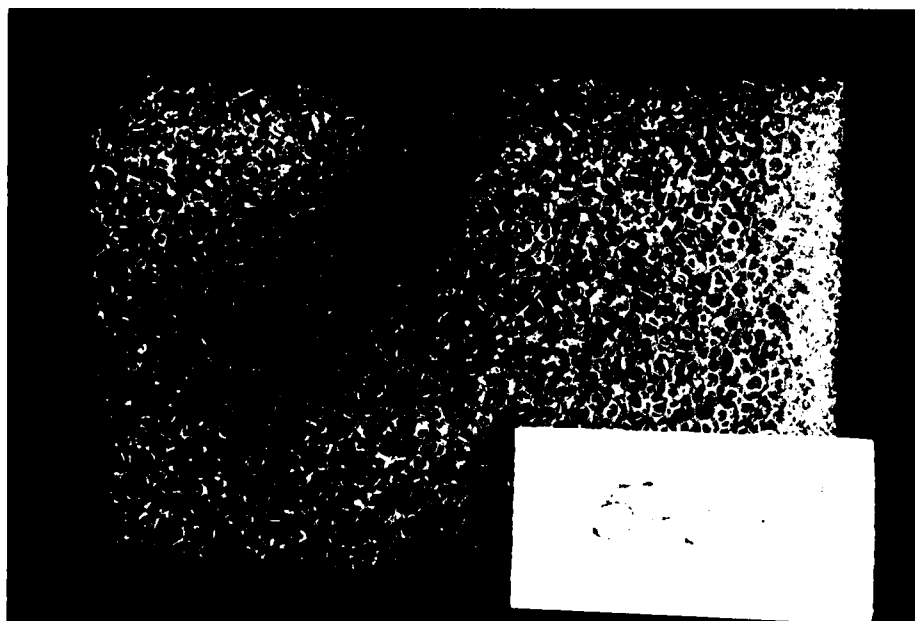


Figure A1-61. Sample 5-3-7 (aged foam), cross-sectional view.

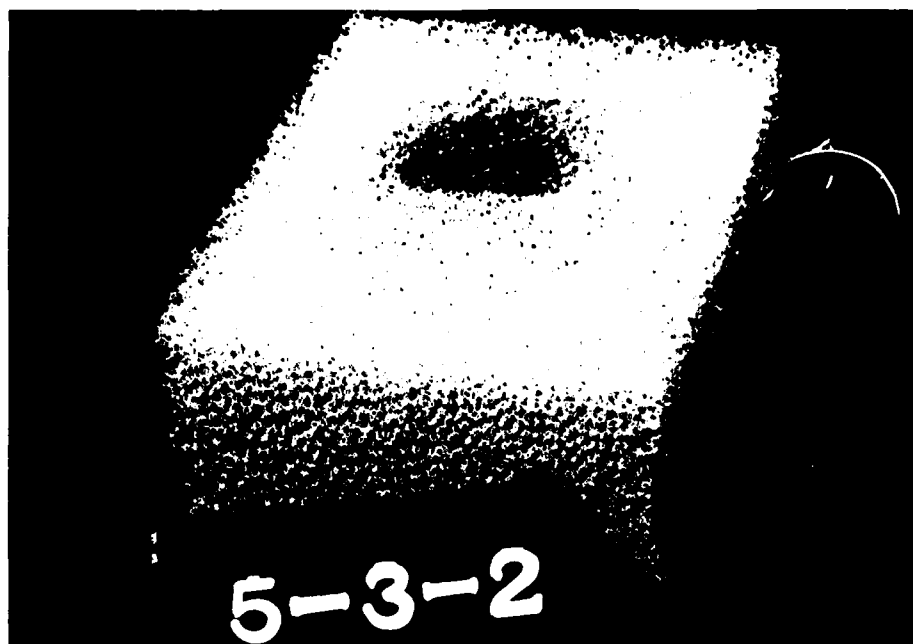


Figure A1-58. Sample 5-3-2, perspective view.

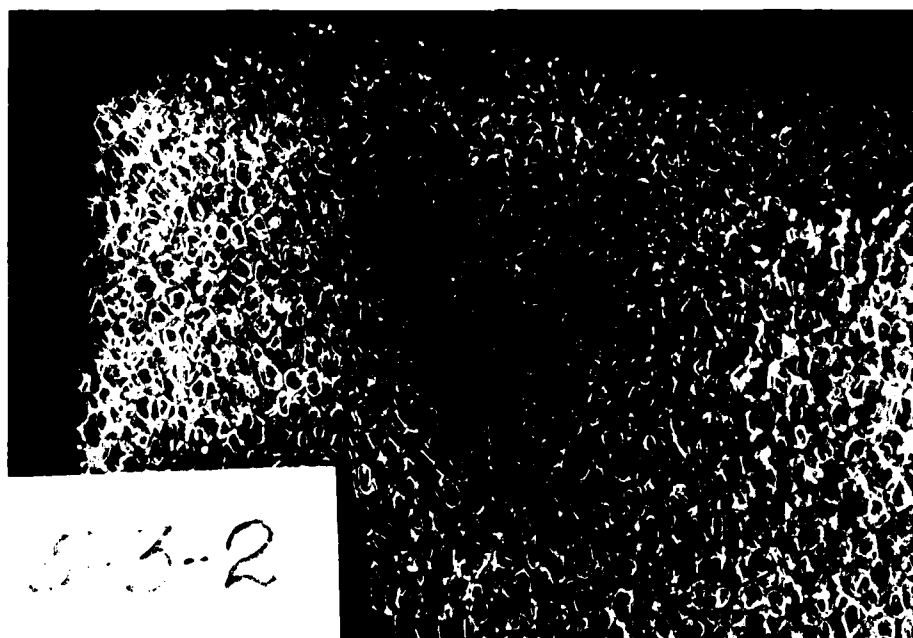


Figure A1-59. Sample 5-3-2, cross-sectional view.

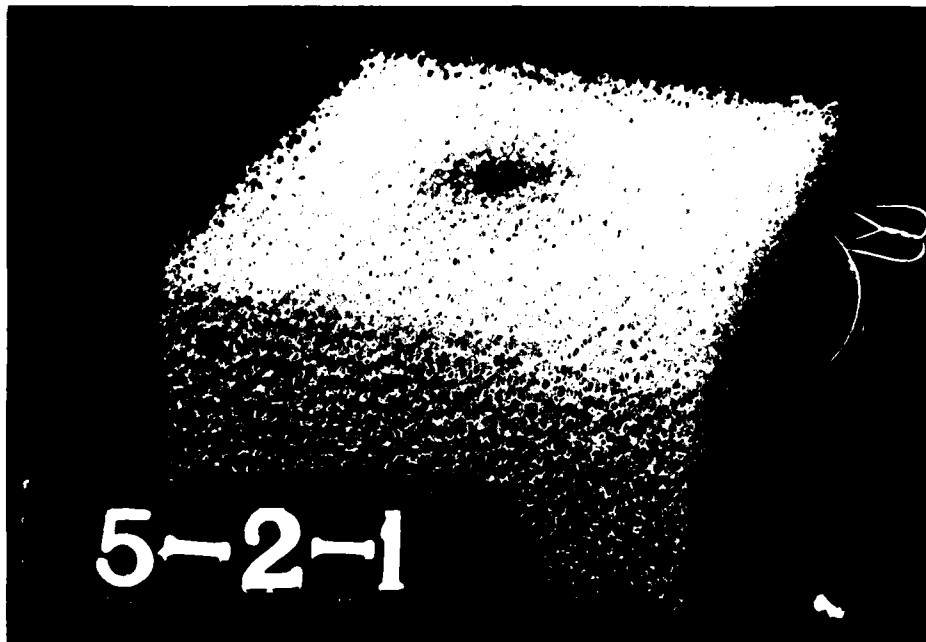


Figure A1-56. Sample 5-2-1, perspective view.

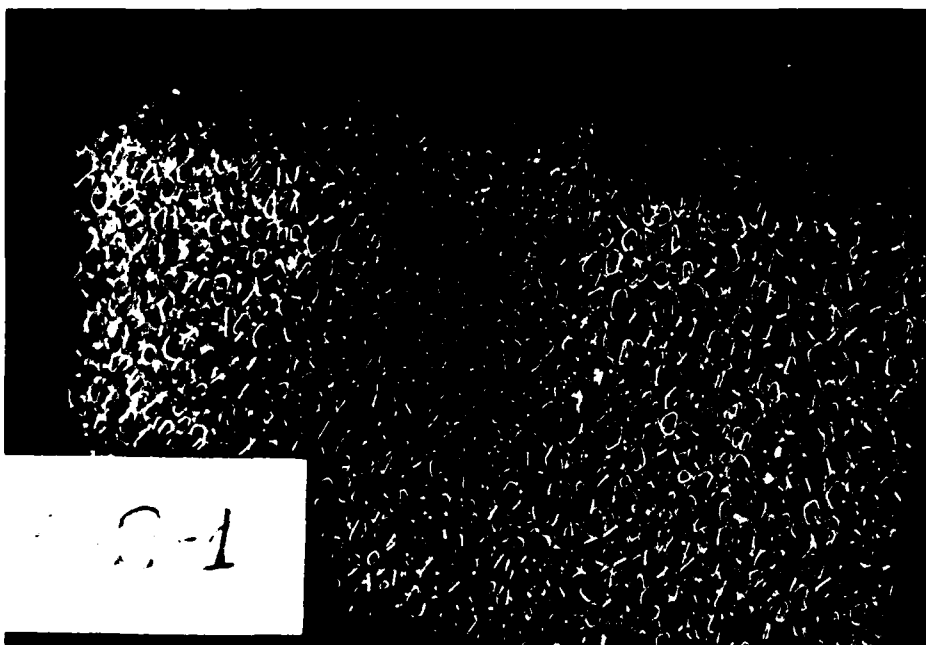


Figure A1-57. Sample 5-2-1, cross-sectional view.

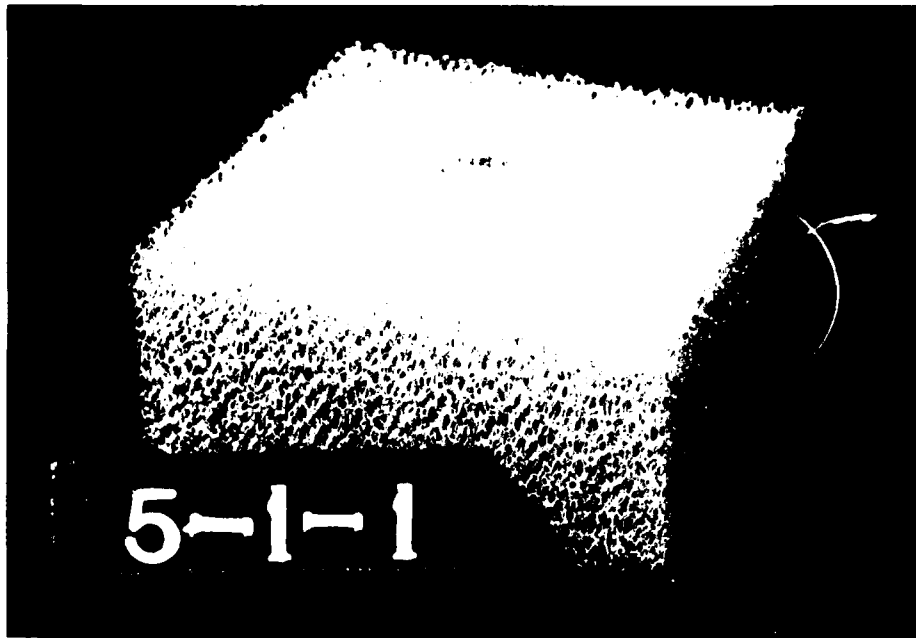


Figure A1-54. Sample 5-1-1, perspective view.

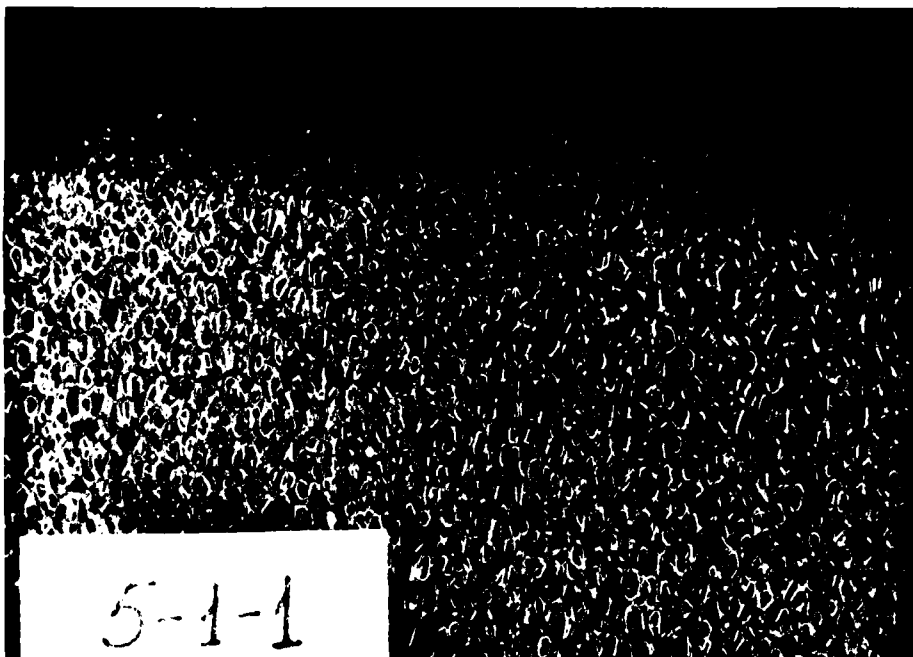


Figure A1-55. Sample 5-1-1, cross-sectional view.

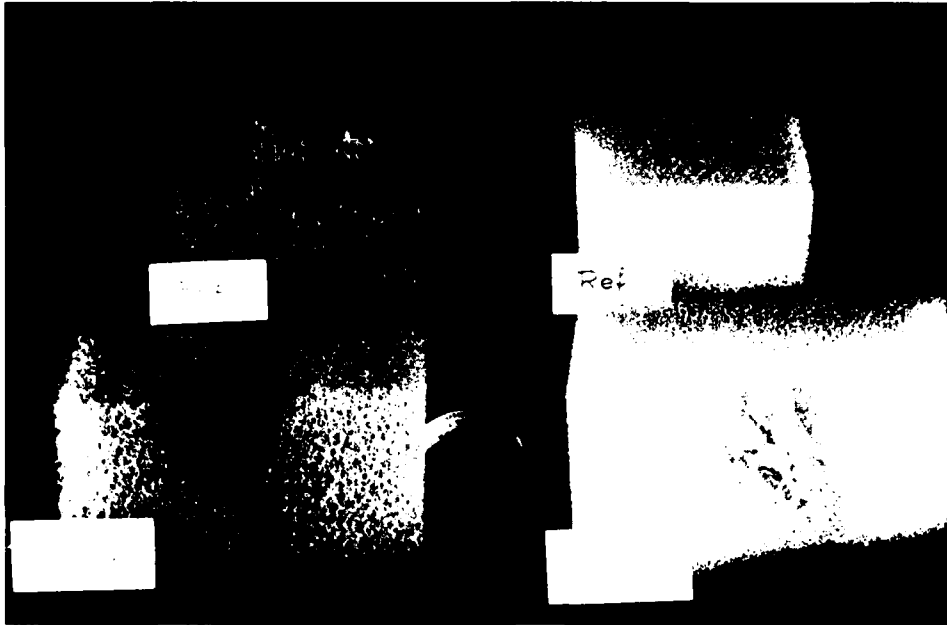


Figure A1-52. Cross-sectional view of blue and red foam specimens, subjected to hot air impingement for five seconds.

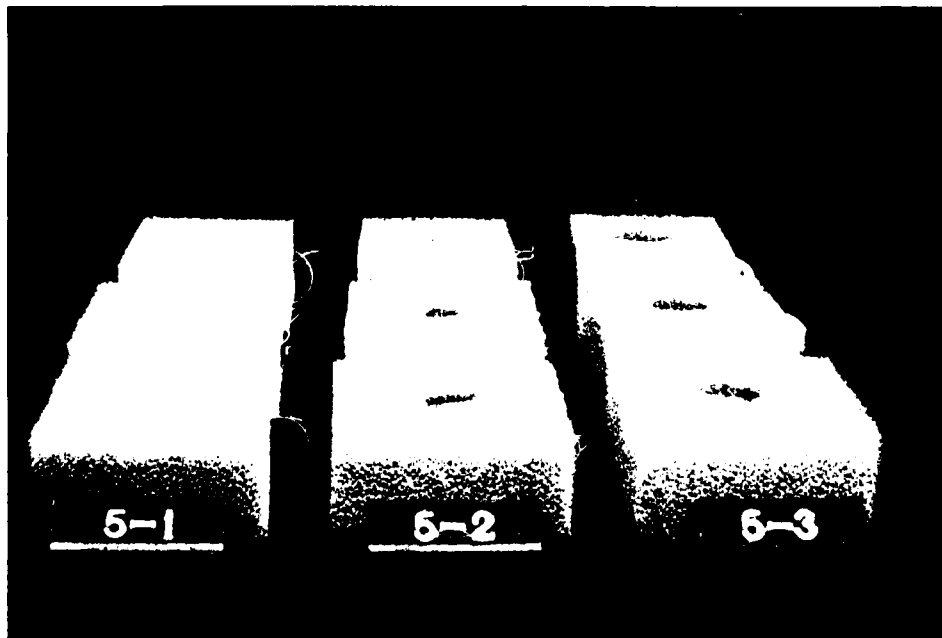


Figure A1-53. Perspective view of blue foam specimens, subjected to hot air impingement for ~2, ~3.5, and ~5 seconds, respectively.

A1.6. FIGURES DEPICTING SAMPLES FROM HOT
AIR IMPINGEMENT EXPERIMENTS

Specimens produced in hot air impingement experiments are identified in Table A1-5.

TABLE A1-5. CODE FOR FOAM SPECIMENS PRODUCED
BY HOT AIR IMPINGEMENT

Foam	Sample size, in.	Exposure duration, sec		
		~2	~3.5	~5
Blue, dry, new	4x4x2	5-1-1	5-2-1	5-3-1
	4x4x2	5-1-2	5-2-2	5-3-2
	4x4x2	5-1-3	5-2-3	5-3-3
Blue, dry, aged	3x3x2			5-3-7 ^a
Red, dry, new	4x4x2	5-1-10	5-2-10	5-3-10
	4x4x2	5-1-11	5-2-11	5-3-11
	4x4x2	5-1-12	5-2-12	5-3-12

^aThis sample had been subjected to accelerated aging
in air at 200°F (93°C) for five weeks.

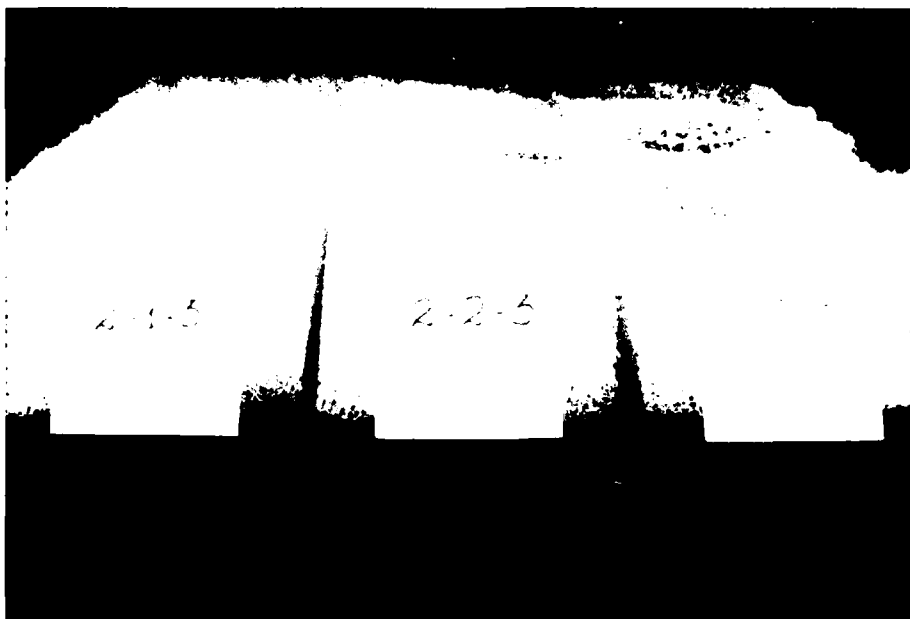


Figure A1-50. Specimens of yellow foam, cut along the upper surface at 10, 5, and 2.5 ft/min, respectively.

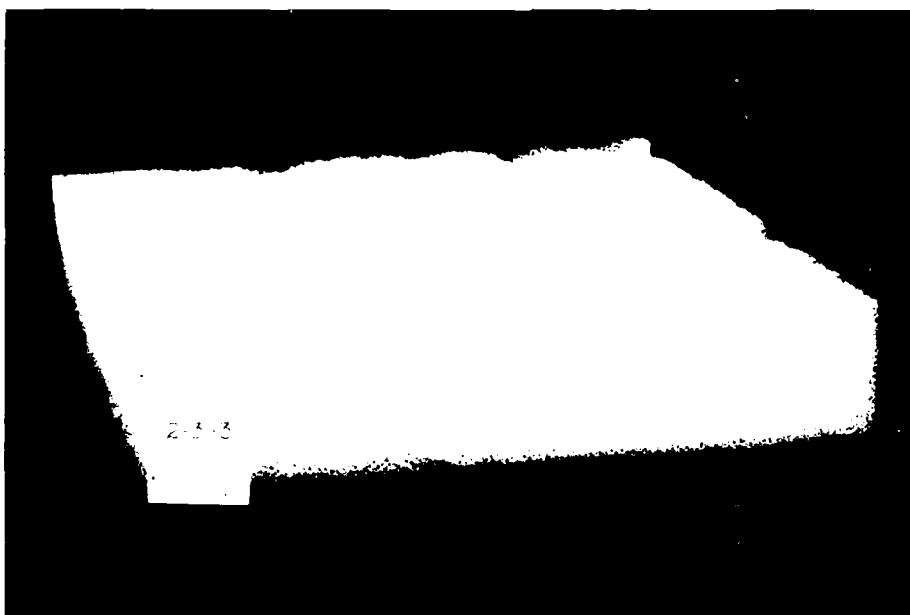


Figure A1-51. Sample 2-3-3, perspective view.

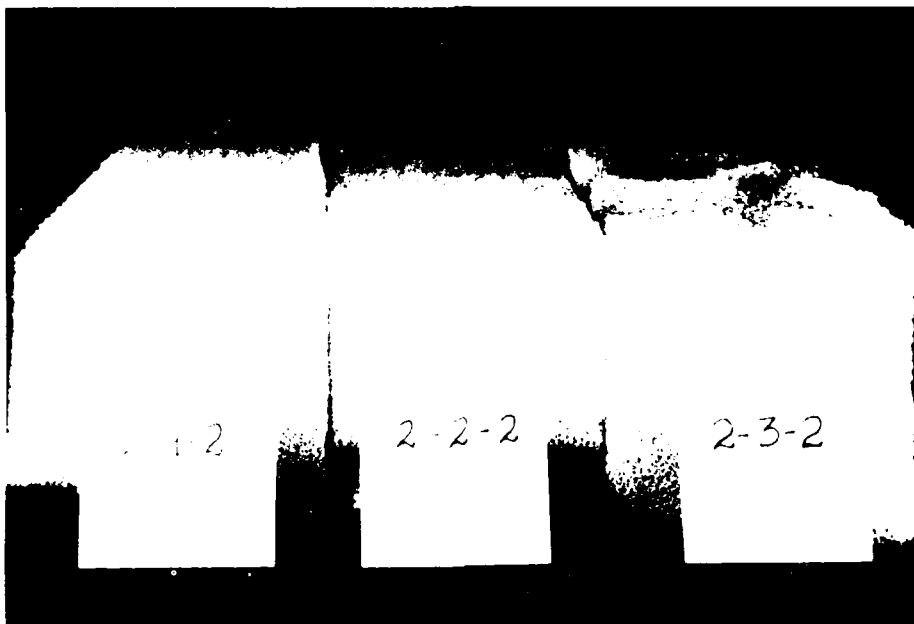


Figure A1-48. Specimens of red foam, cut along the upper surface at 10, 5, and 2.5 ft/min, respectively.

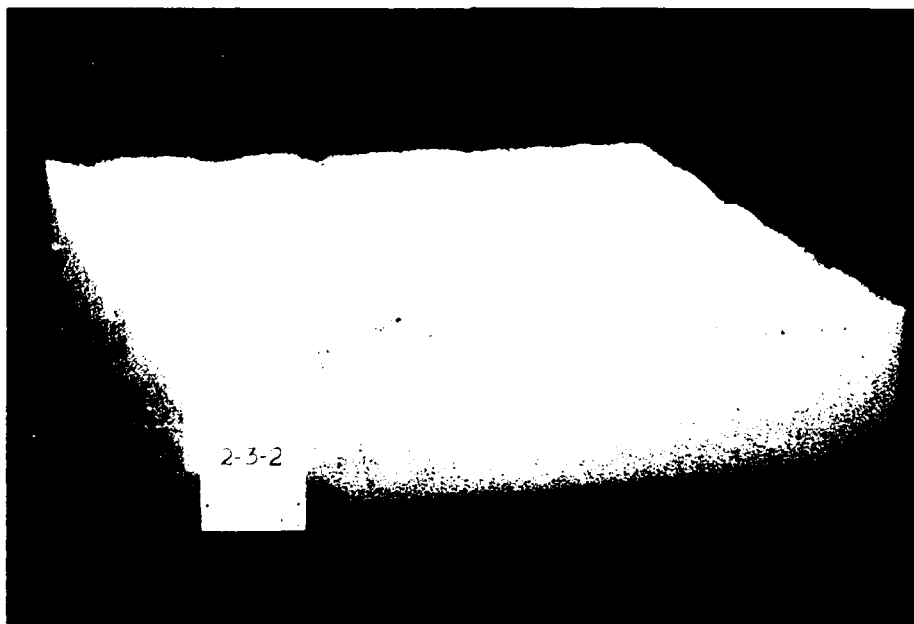


Figure A1-49. Sample 2-3-2, perspective view.

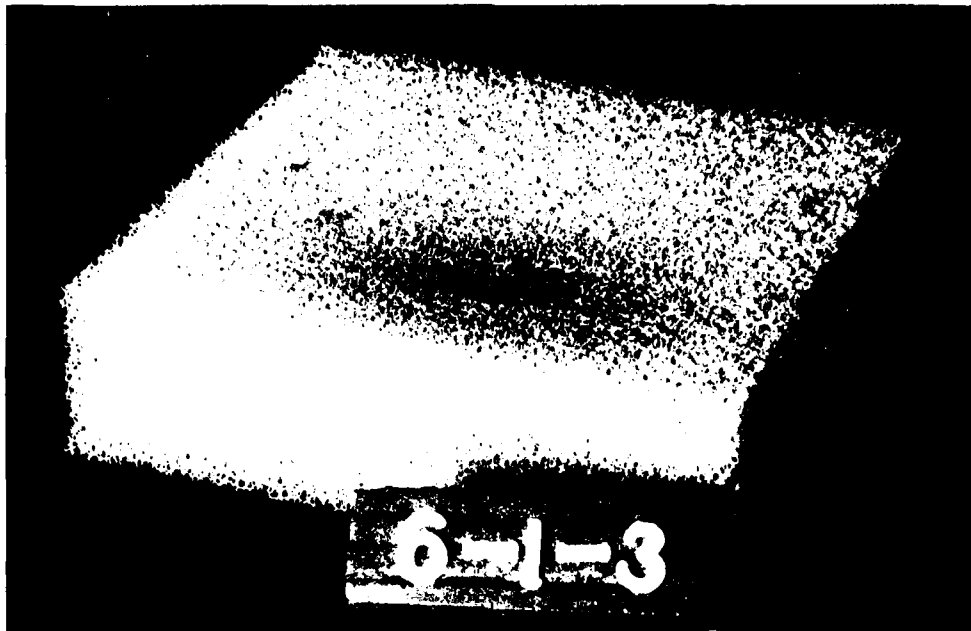


Figure A1-71. Sample 6-1-3, perspective view.

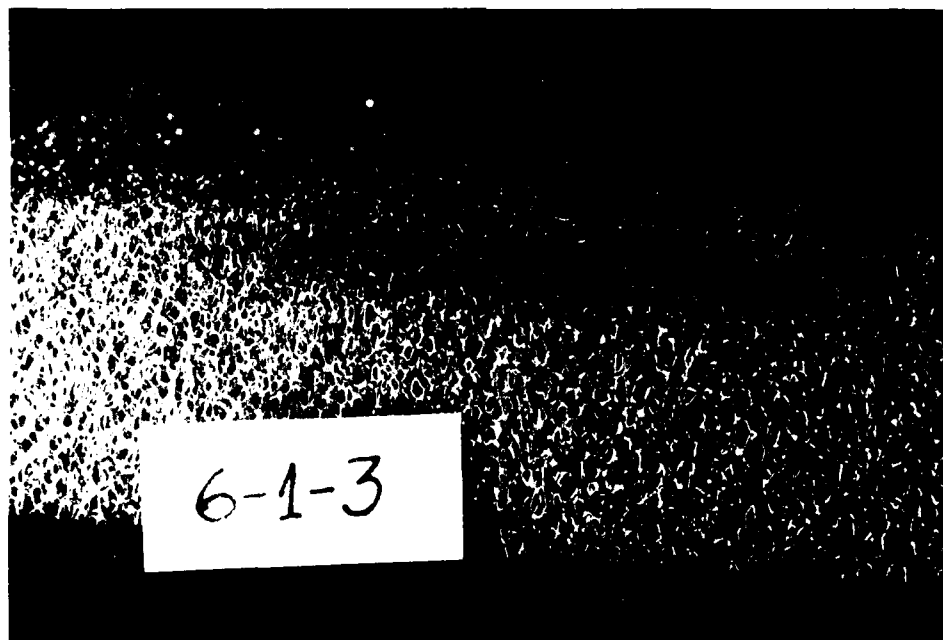


Figure A1-72. Sample 6-1-3, cross-sectional view.

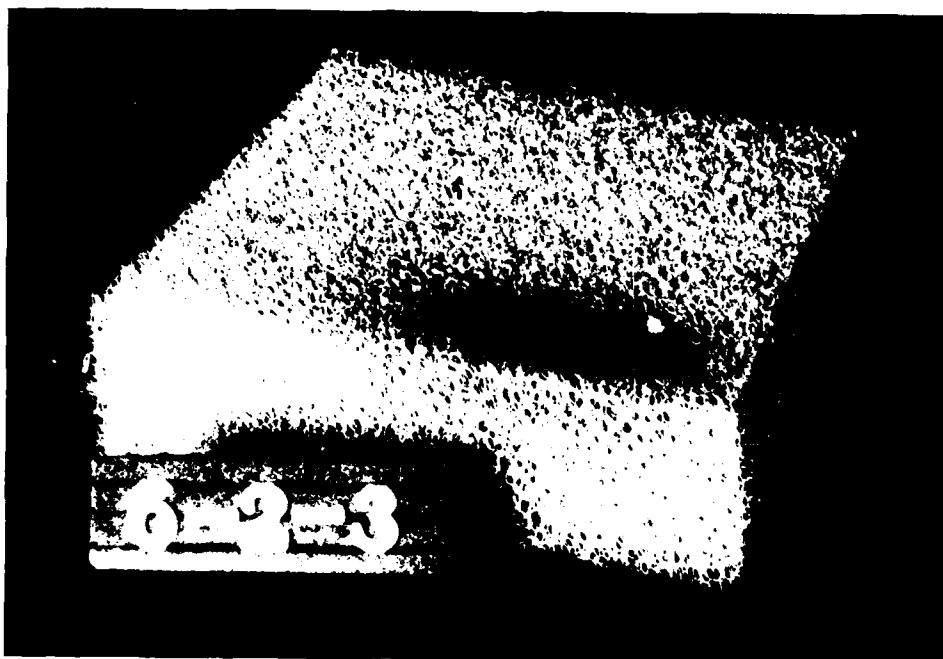


Figure A1-73. Sample 6-2-3, perspective view.

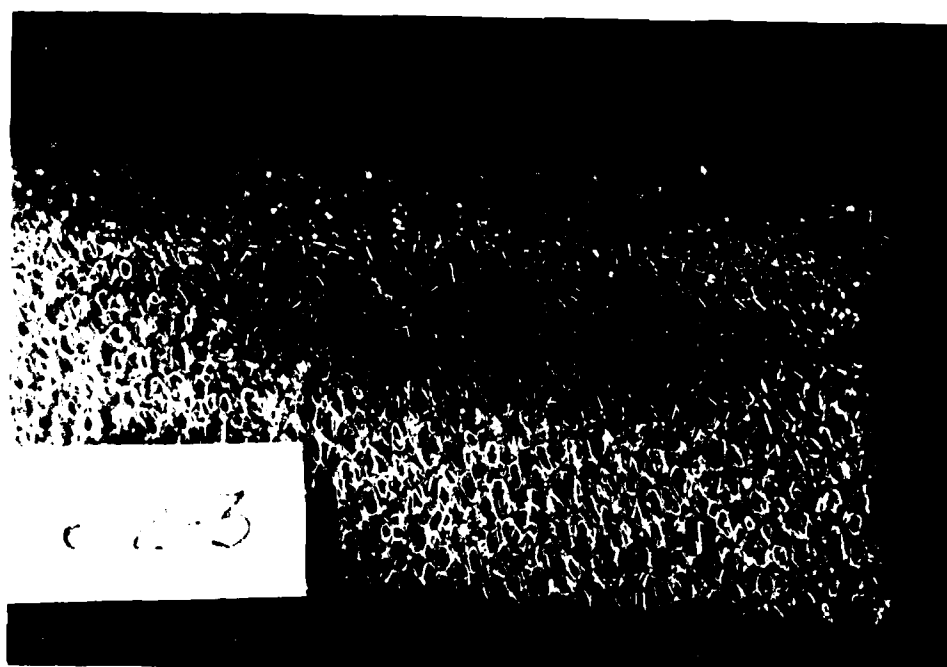


Figure A1-74. Sample 6-2-3, cross-sectional view.

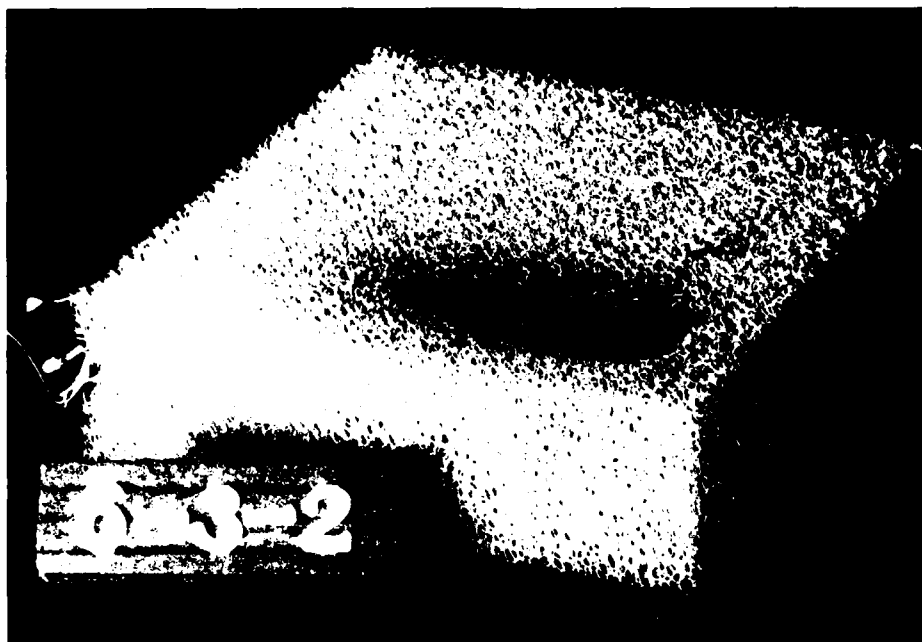


Figure A1-75. Sample 6-3-2, perspective view.



Figure A1-76. Sample 6-3-2, cross-sectional view.

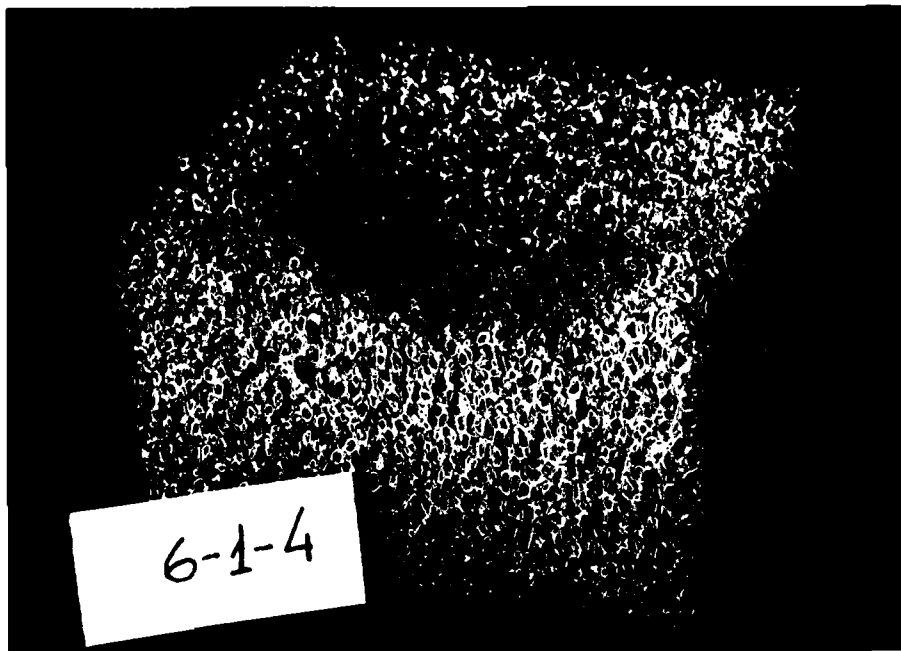


Figure A1-77. Sample 6-1-4 (aged foam), perspective view.

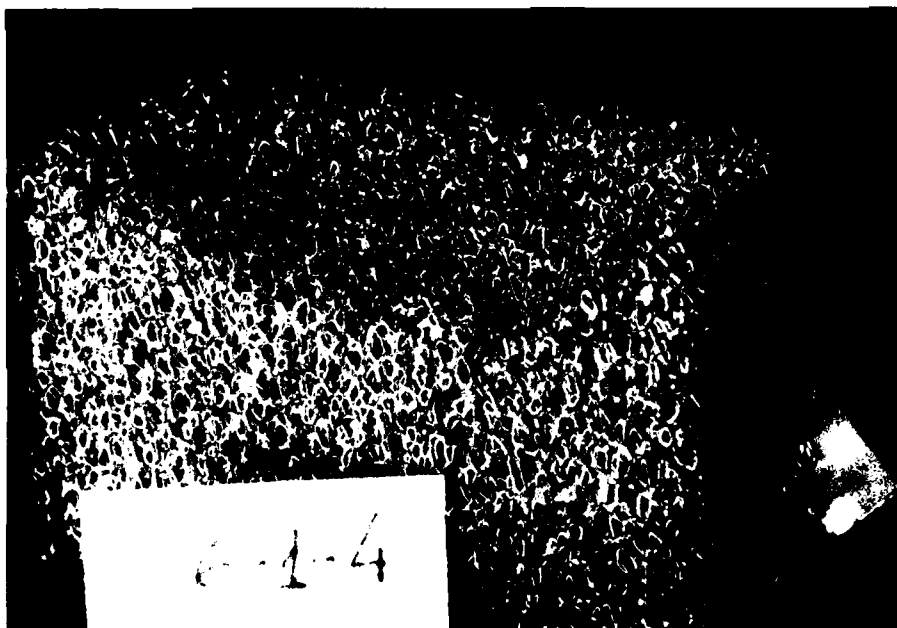


Figure A1-78. Sample 6-1-4 (aged foam), cross-sectional view.

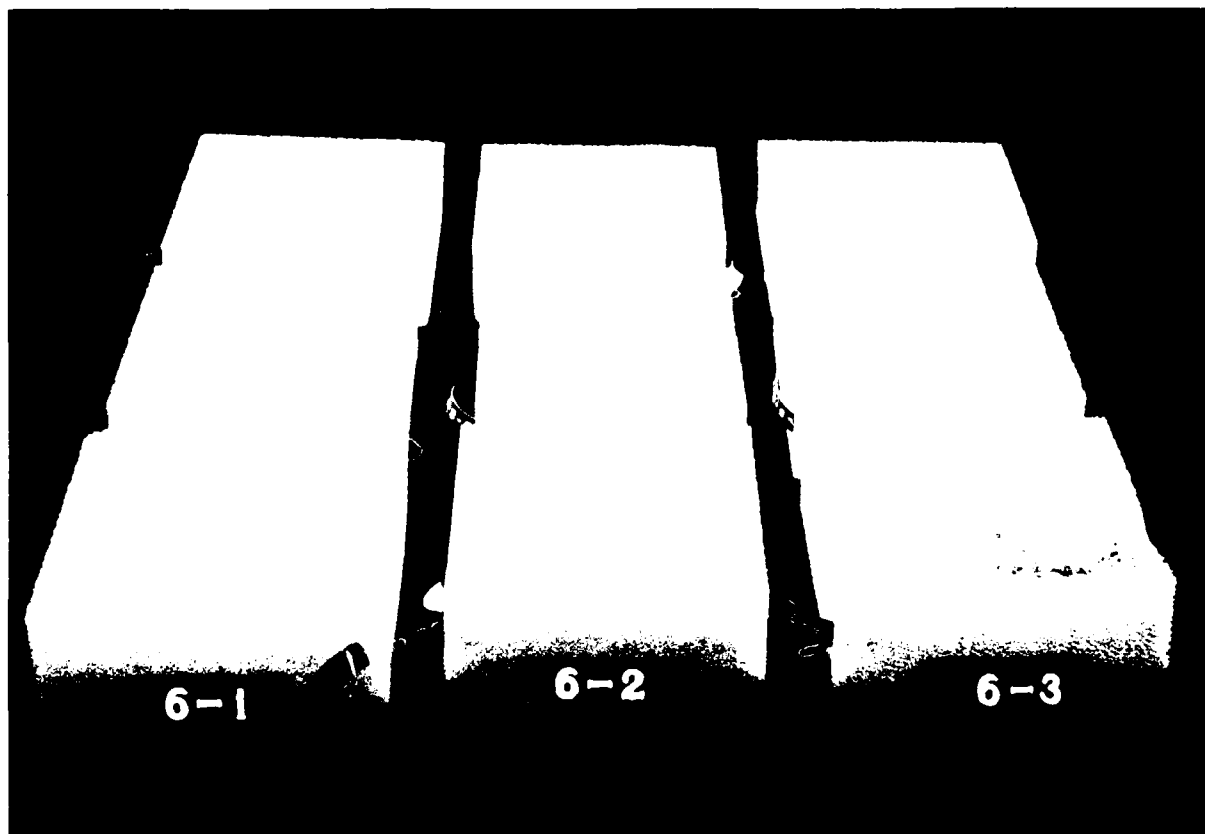


Figure A1-79. Perspective view of red foam specimens, subjected to radiant heat exposure for 10, 20, and 30 seconds, respectively.

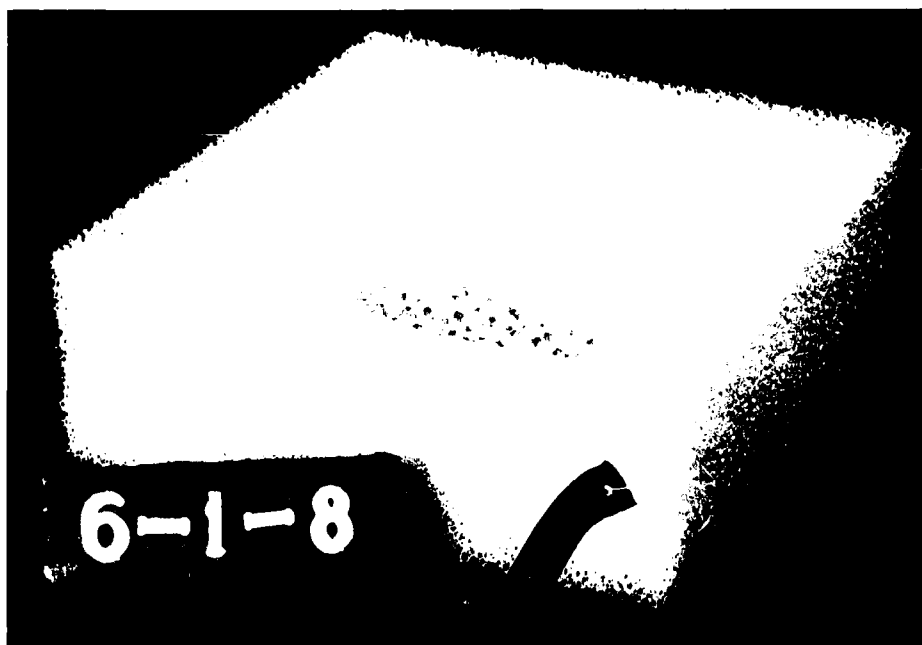


Figure A1-80. Sample 6-1-8, perspective view.

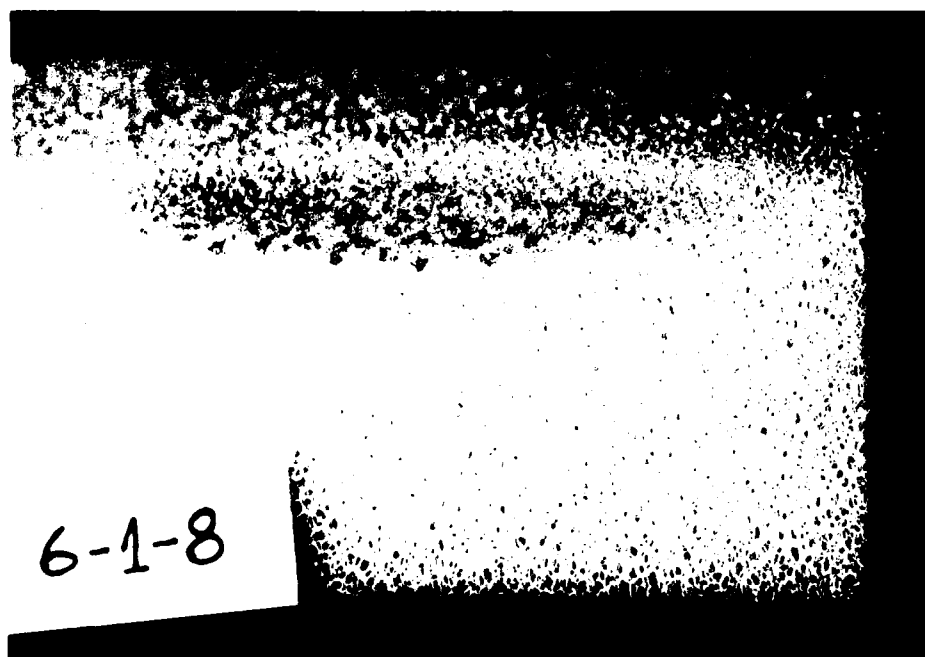


Figure A1-81. Sample 6-1-8, cross-sectional view.

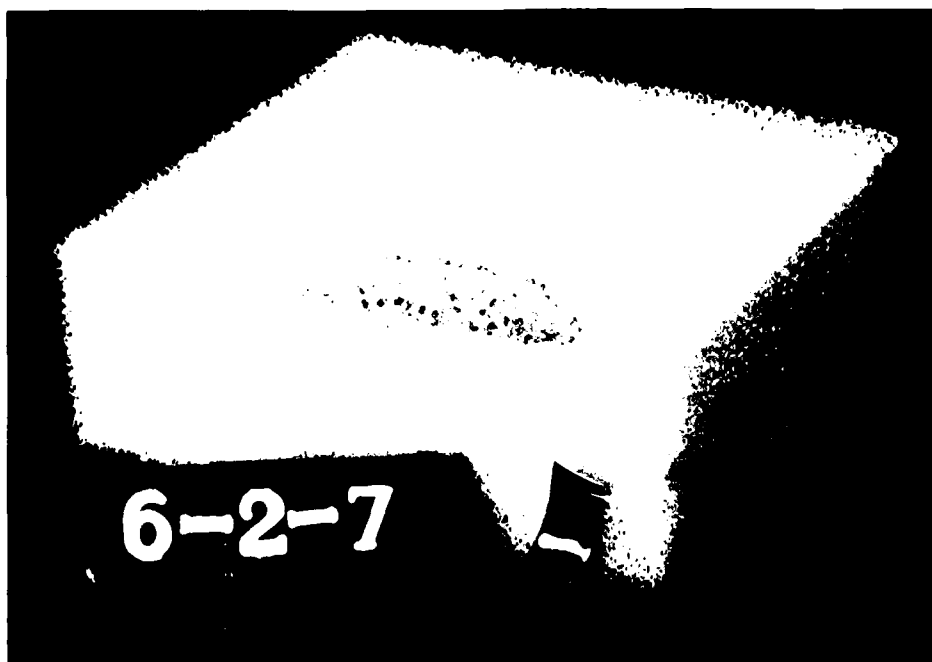


Figure A1-82. Sample 6-2-7, perspective view.

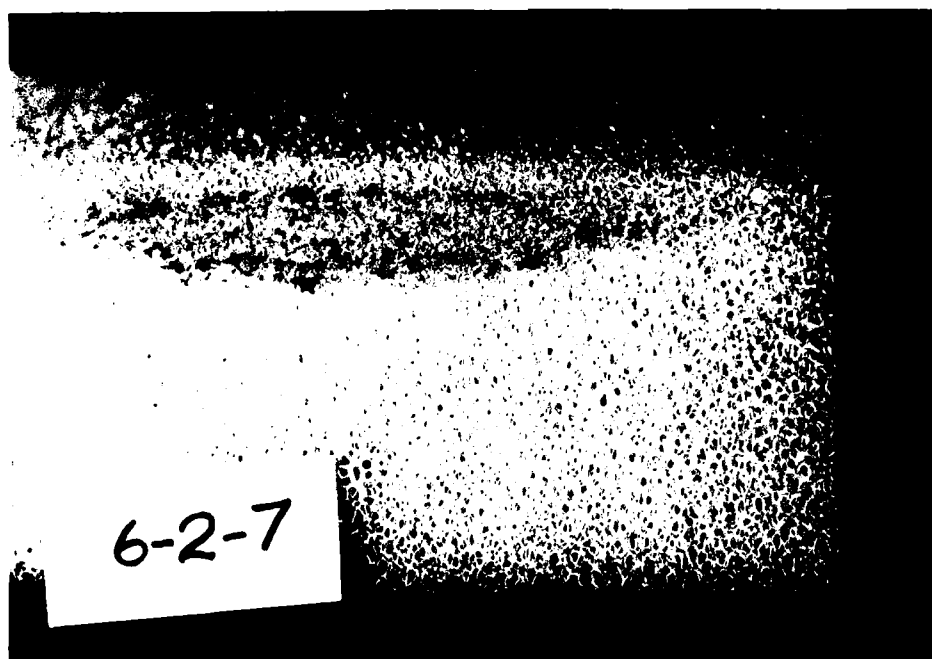


Figure A1-83. Sample 6-2-7, cross-sectional view.

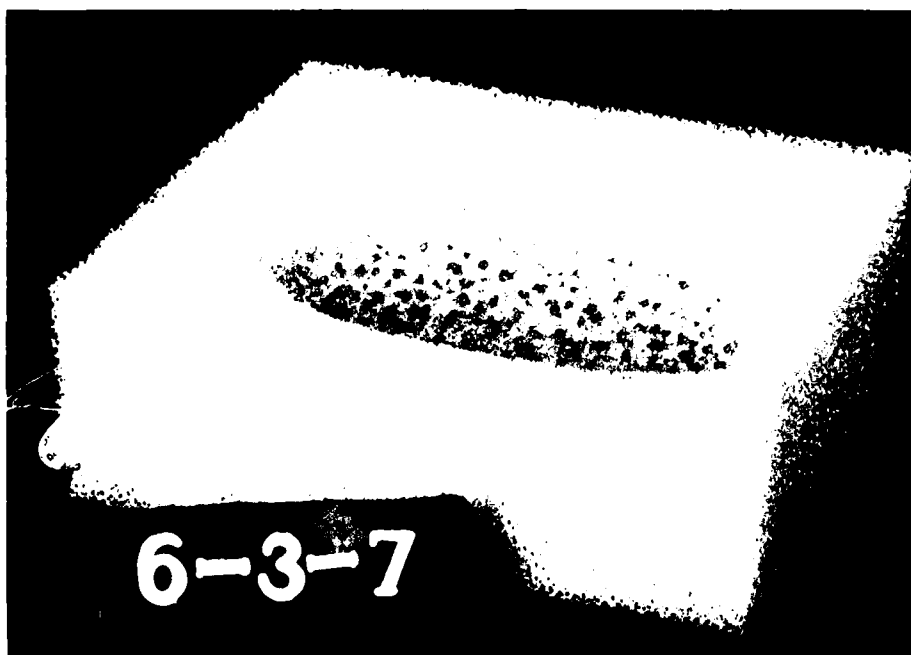


Figure A1-84. Sample 6-3-7, perspective view.

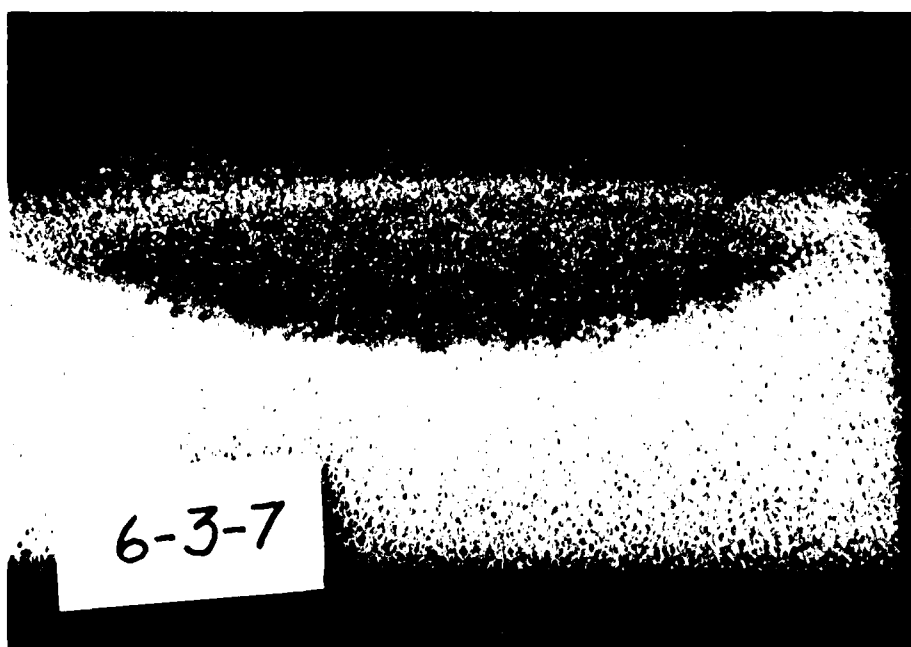


Figure A1-85. Sample 6-3-7, cross-sectional view.

A1.8. FIGURES DEPICTING FOAM SAMPLES FROM
BRIEF FLAME IMPINGEMENT EXPERIMENTS

Designation of samples produced in brief flame impingement experiments is shown in Table A1-7.

TABLE A1-7. CODE FOR FOAM SPECIMENS PRODUCED
BY BRIEF FLAME IMPINGEMENT

<u>Foam</u>	<u>Sample size, in.</u>	<u>Horizontal, top ignition</u>	<u>Vertical, bottom ignition</u>	<u>Horizontal, bottom ignition</u>
Blue, dry, new	6x6x2	3-1-1	3-2-1	3-3-1
	6x6x2	3-1-2	3-2-2	3-3-2
	6x6x2	3-1-3	3-2-3	3-3-3
Blue, wet, new	6x6x2	3-1-4	3-2-4	
	6x6x2	3-1-5	3-2-5	
Blue, dry, aged	3x3x2	3-1-9		
Red, dry, new	6x6x2	3-1-10	3-2-10	3-3-10
	6x6x2	3-1-11	3-2-11	3-3-11
	6x6x2	3-1-12	3-2-12	3-3-12
Yellow, dry, new	6x6x2	3-1-13	3-2-13	3-3-13
	6x6x2	3-1-14	3-2-14	3-3-14
	6x6x2	3-1-15	3-2-15	3-3-15

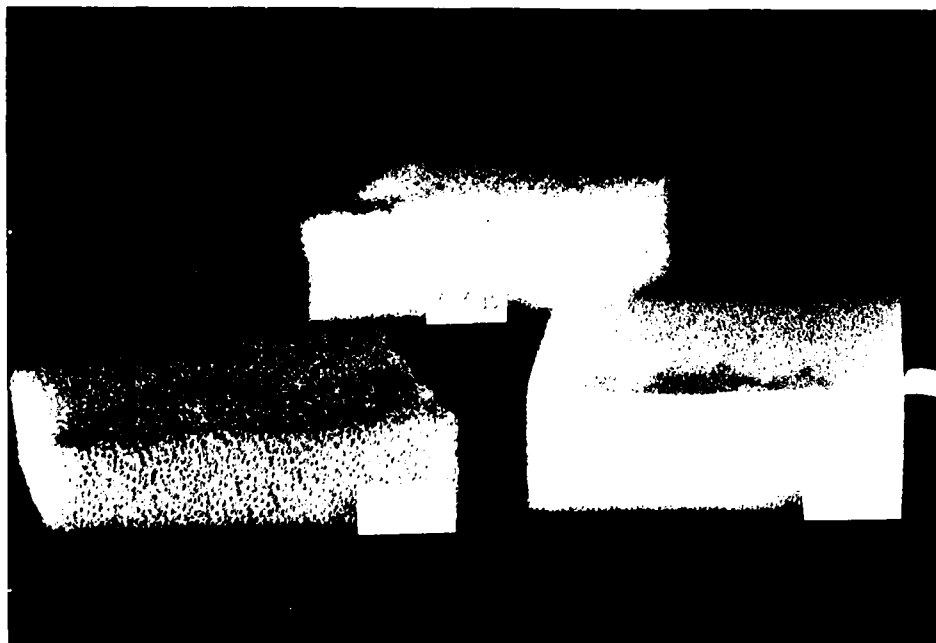


Figure A1-86. Cross-sectional view of blue, red, and yellow foam specimens, subjected to brief flame impingement at the bottom while in horizontal position.

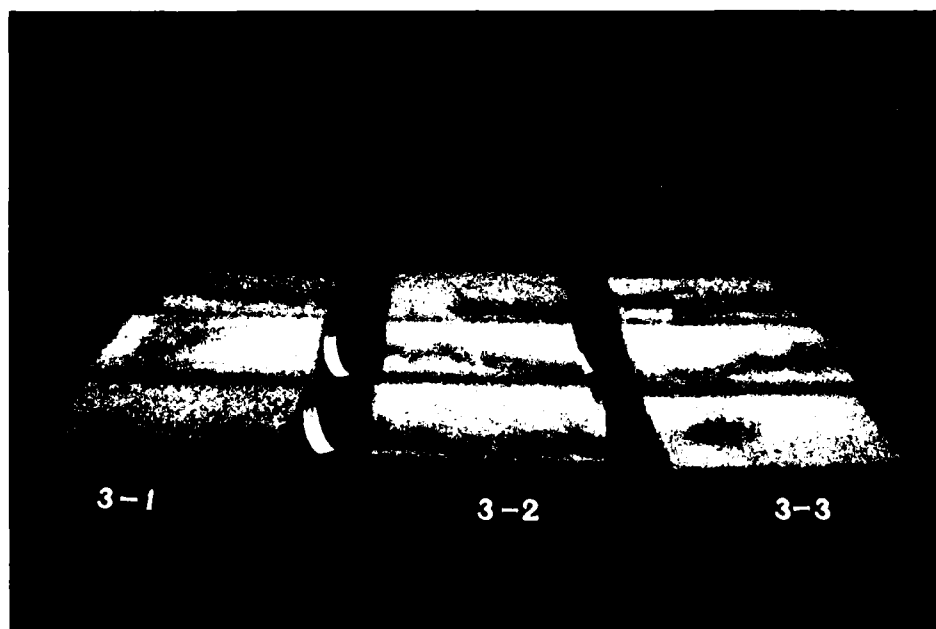


Figure A1-87. Perspective view of blue foam specimens, subjected to brief flame impingement from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively.

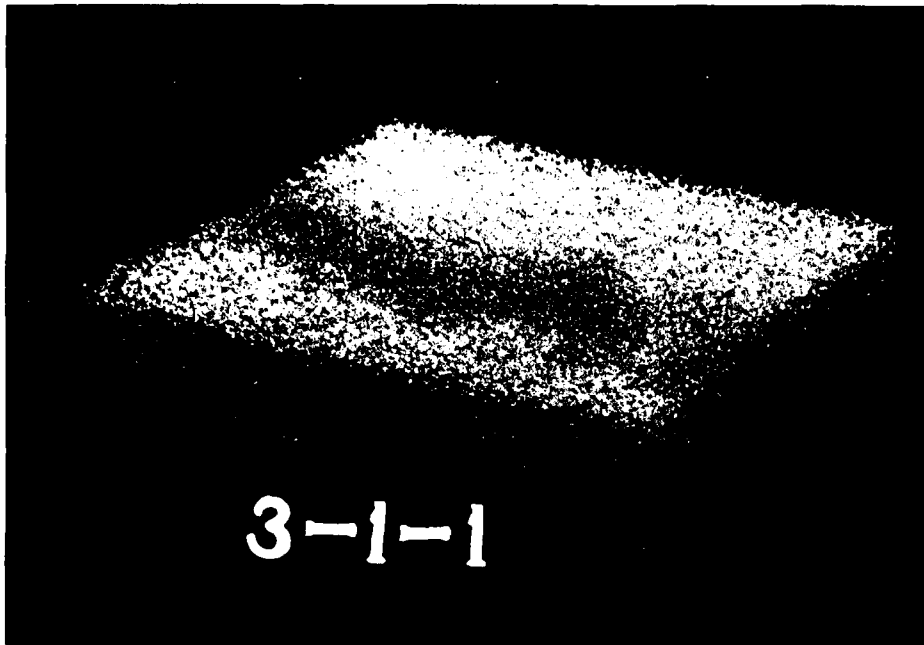


Figure A1-88. Sample 3-1-1, perspective view.

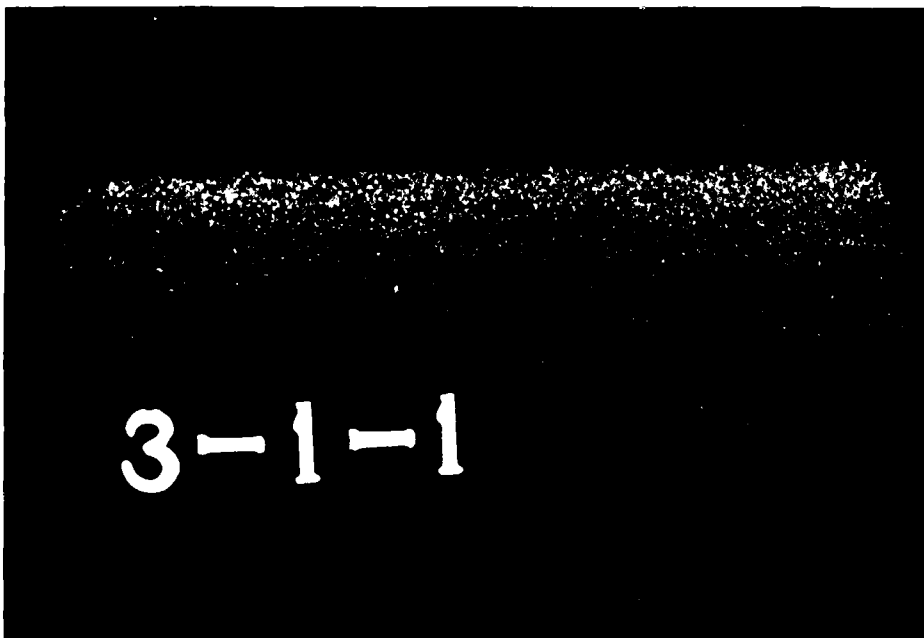


Figure A1-89. Sample 3-1-1, cross-sectional view.

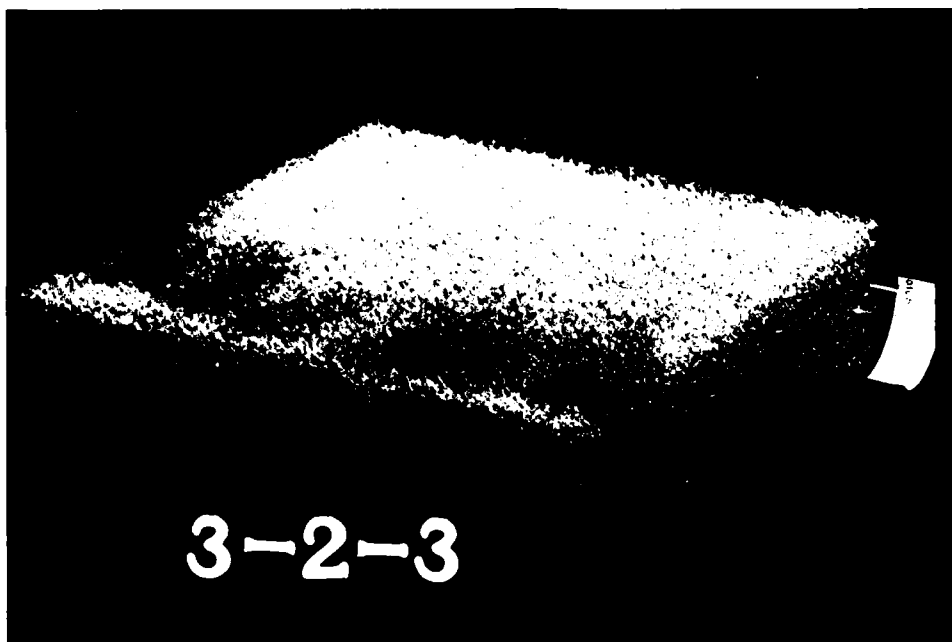


Figure A1-90. Sample 3-2-3, perspective view.

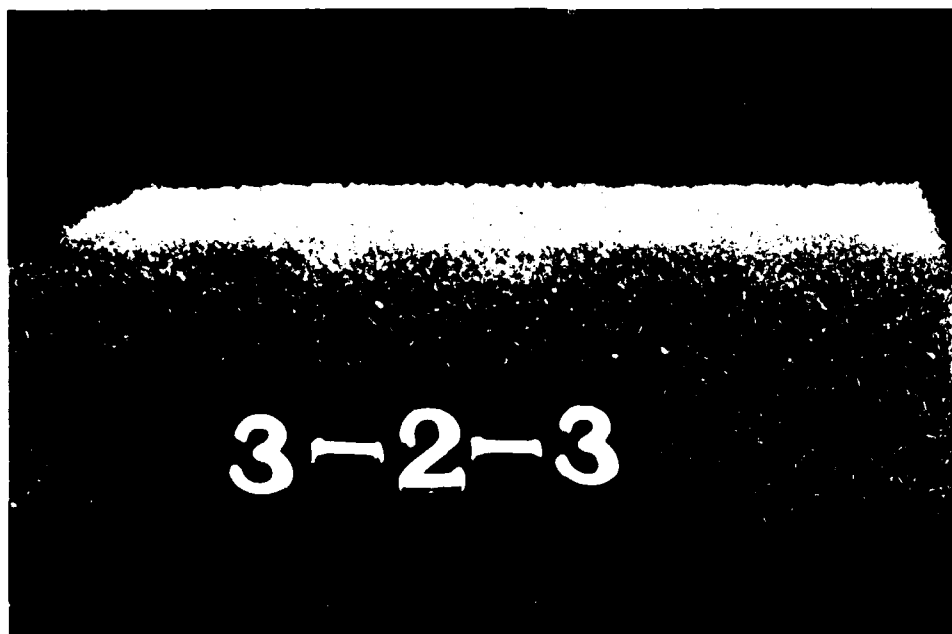


Figure A1-91. Sample 3-2-3, cross-sectional view.

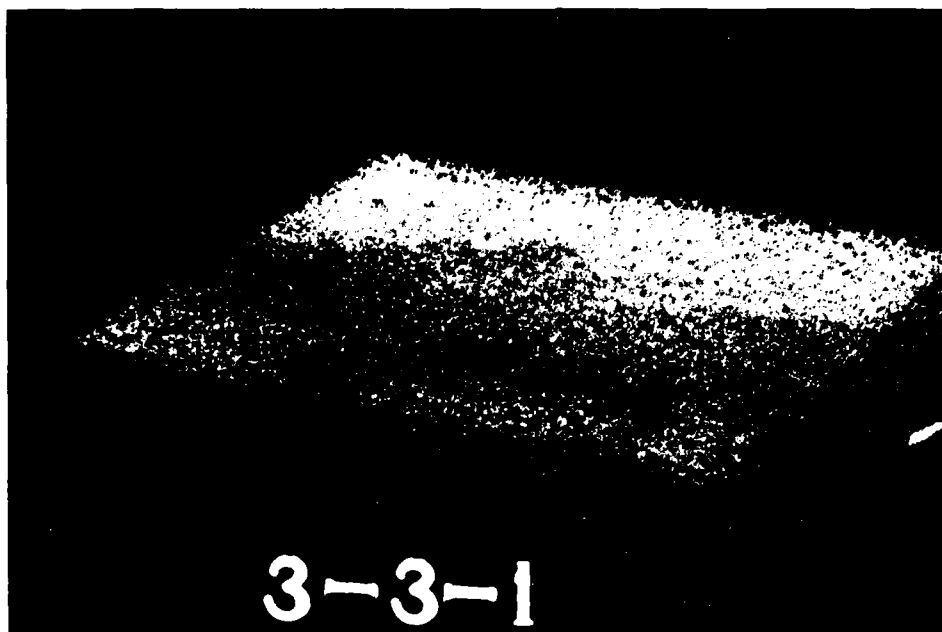


Figure A1-92. Sample 3-3-1, perspective view.

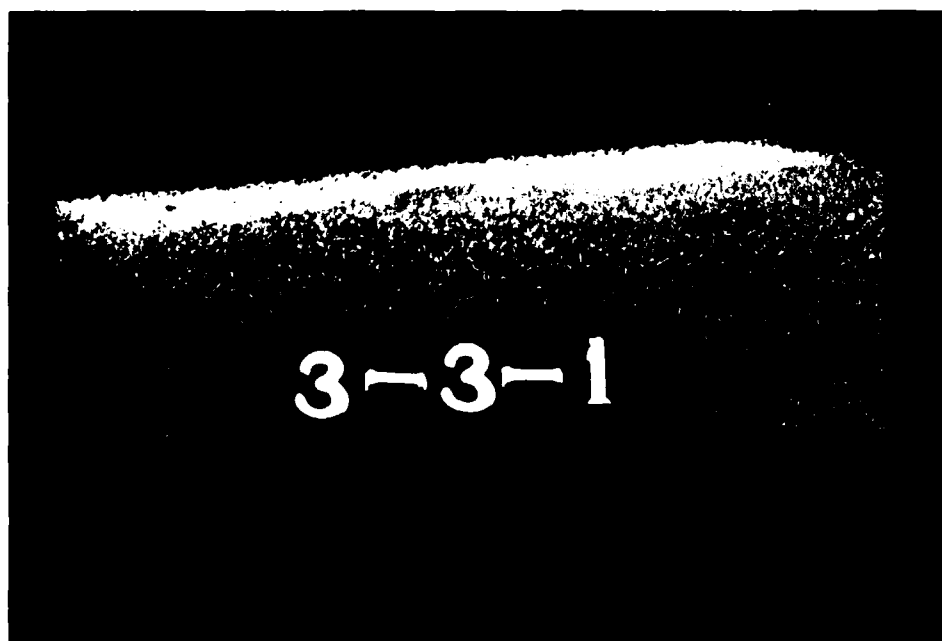


Figure A1-93. Sample 3-3-1, cross-sectional view.

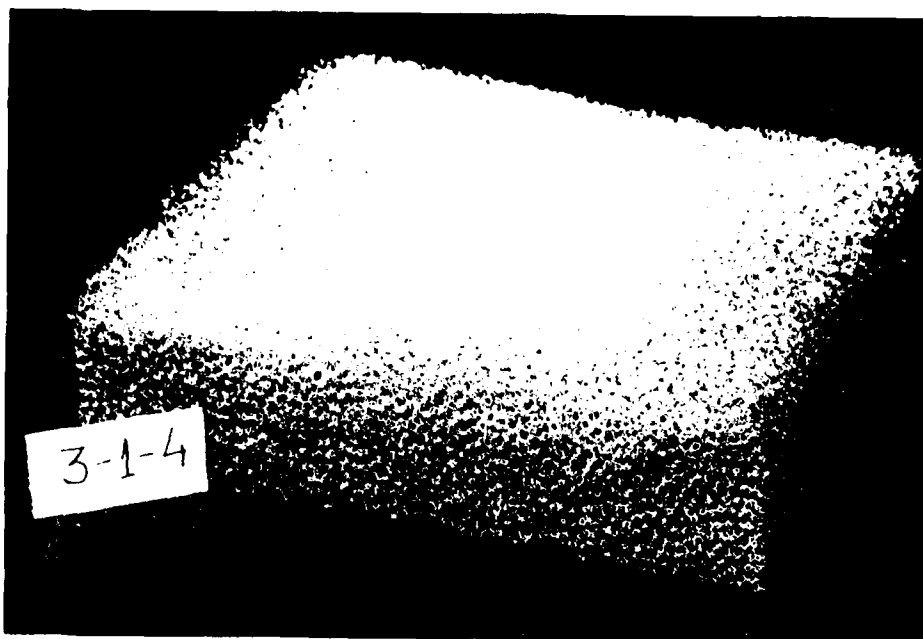


Figure A1-94. Sample 3-1-4 (wet, new foam), perspective view.

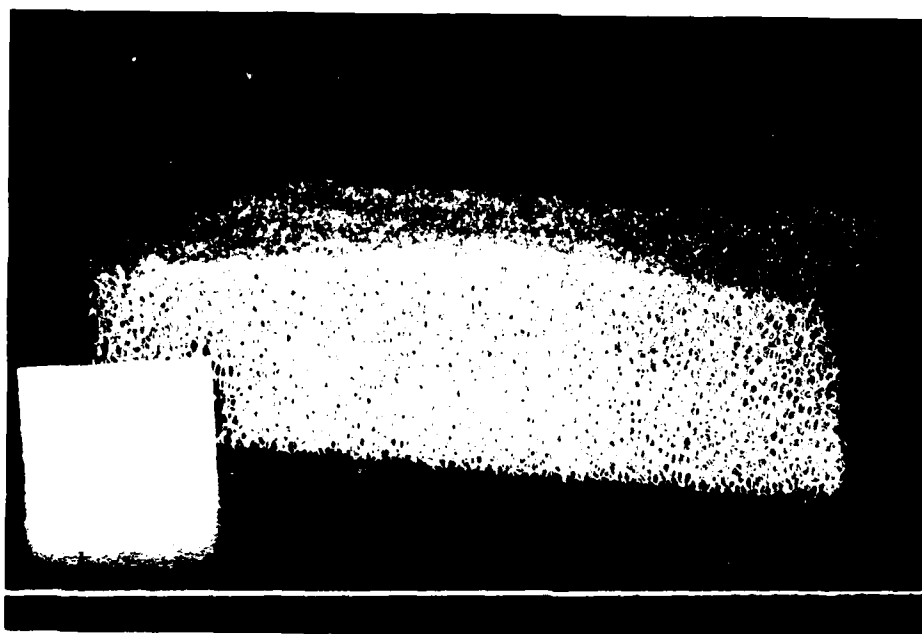


Figure A1-95. Sample 3-1-4 (wet, new foam), cross-sectional view.

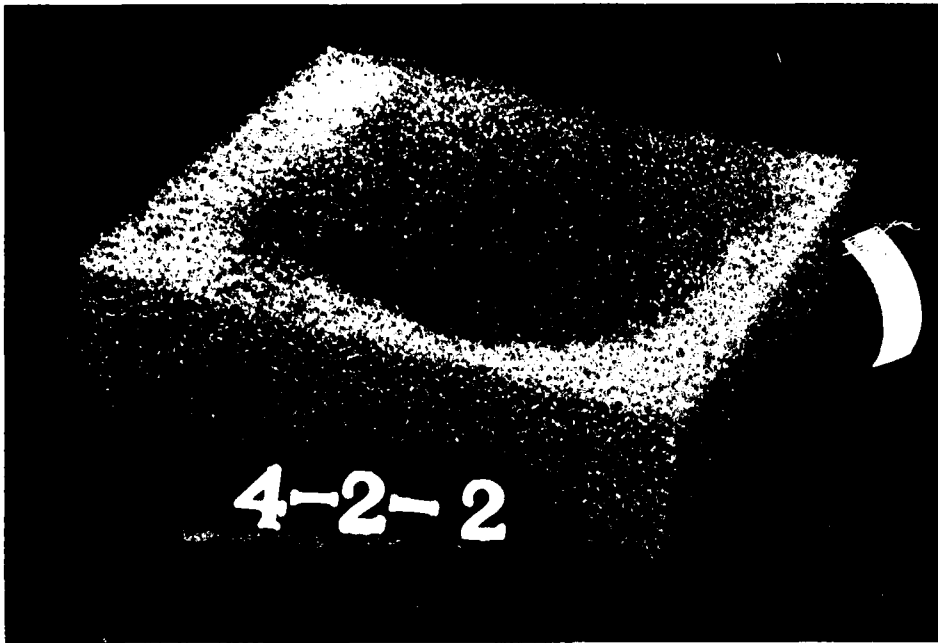


Figure A1-118. Sample 4-2-2, perspective view.

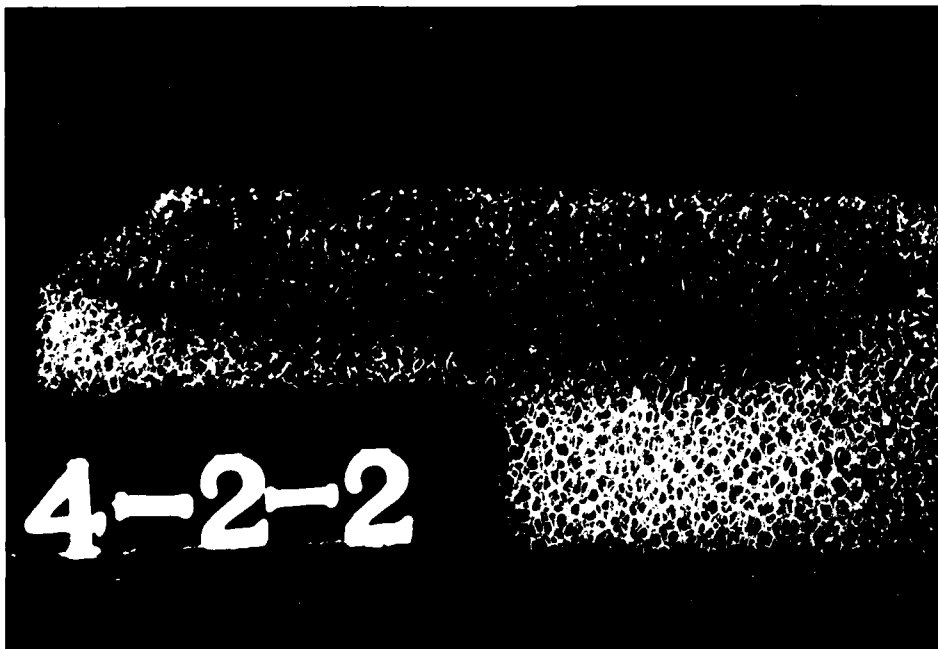


Figure A1-119. Sample 4-2-2, cross-sectional view.

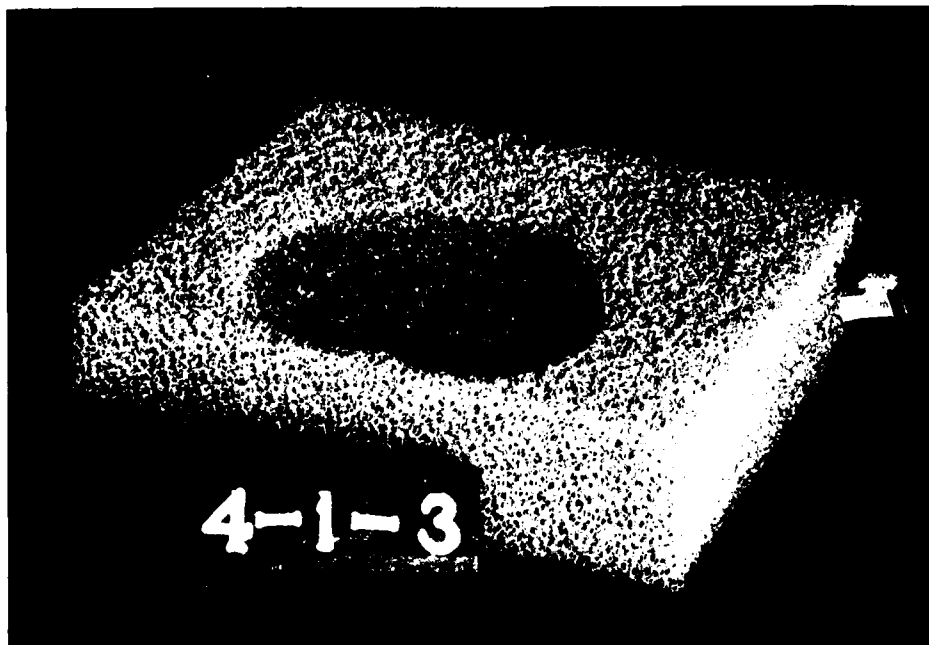


Figure A1-116. Sample 4-1-3, perspective view.

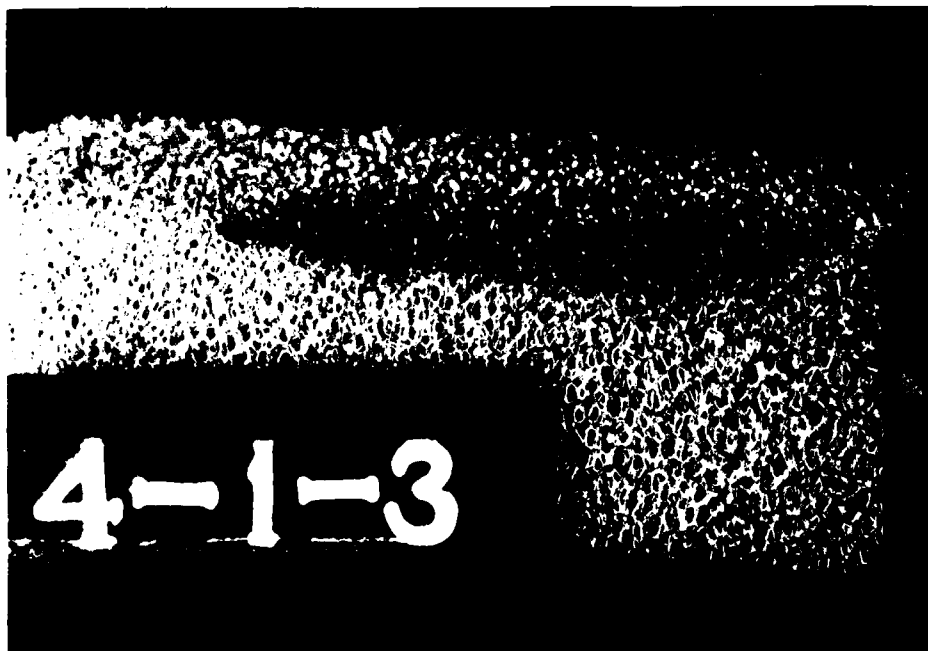


Figure A1-117. Sample 4-1-3, cross-sectional view.

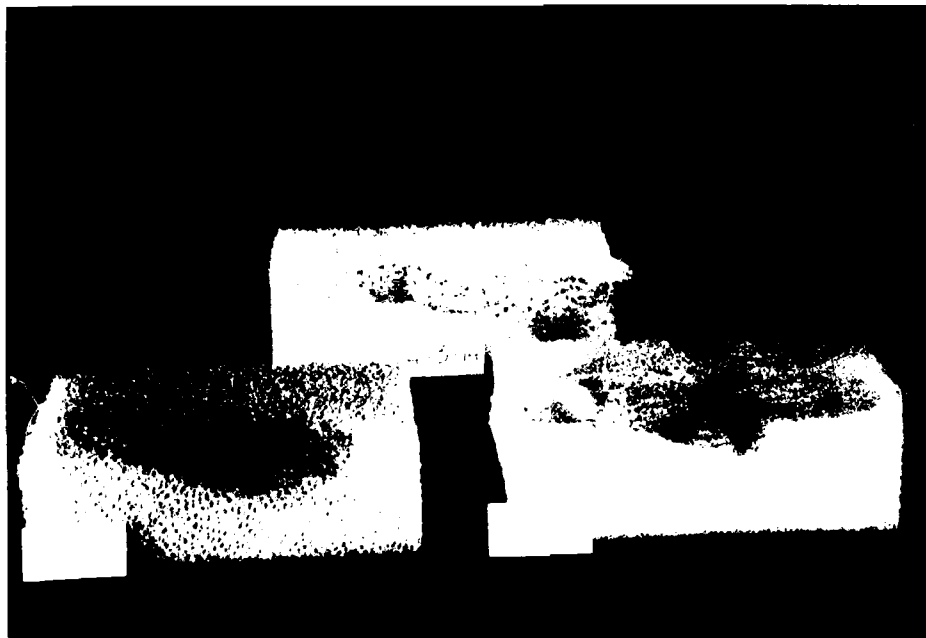


Figure A1-114. Cross-sectional view of blue, red, and yellow foam specimens, subjected to sustained burning by bottom ignition while in horizontal position.

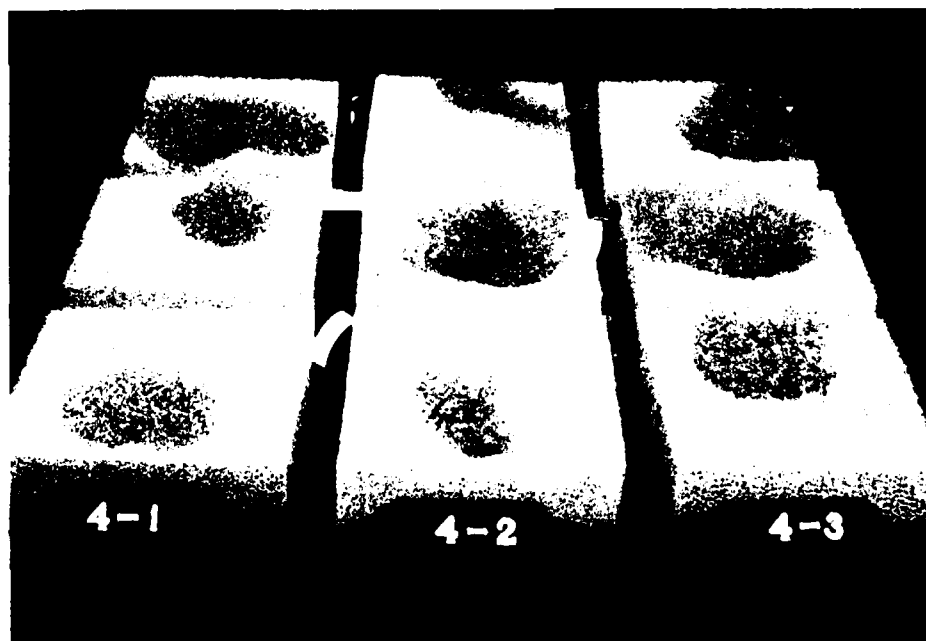


Figure A1-115. Perspective view of blue foam specimens, subjected to sustained burning. Samples ignited by flame from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively.

A1.9. FIGURES DEPICTING FOAM SAMPLES FROM
SUSTAINED BURNING EXPERIMENTS

Samples produced in sustained burning experiments, designated by code in figures, are identified in the following table.

TABLE A1-8. CODE FOR FOAM SPECIMENS PRODUCED
BY SUSTAINED BURNING

<u>Foam</u>	<u>Sample size, in.</u>	<u>Horizontal, top ignition</u>	<u>Vertical, bottom ignition</u>	<u>Horizontal, bottom ignition</u>
Blue, dry, new	6x6x2	4-1-1	4-2-1	4-3-1
	6x6x2	4-1-2	4-2-2	4-3-2
	6x6x2	4-1-3	4-2-3	4-3-3
Blue, wet, new	6x6x2	4-1-4	4-2-4	
	6x6x2	4-1-5	4-2-5	
Blue, dry, aged	3x3x2	4-1-9		
Red, dry, new	6x6x2	4-1-10	4-2-10	4-3-10
	6x6x2	4-1-11	4-2-11	4-3-11
	6x6x2	4-1-12	4-2-12	4-3-12
Yellow, dry, new	6x6x2	4-1-13	4-2-13	4-3-13
	6x6x2	4-1-14	4-2-14	4-3-14
	6x6x2	4-1-15	4-2-15	4-3-15

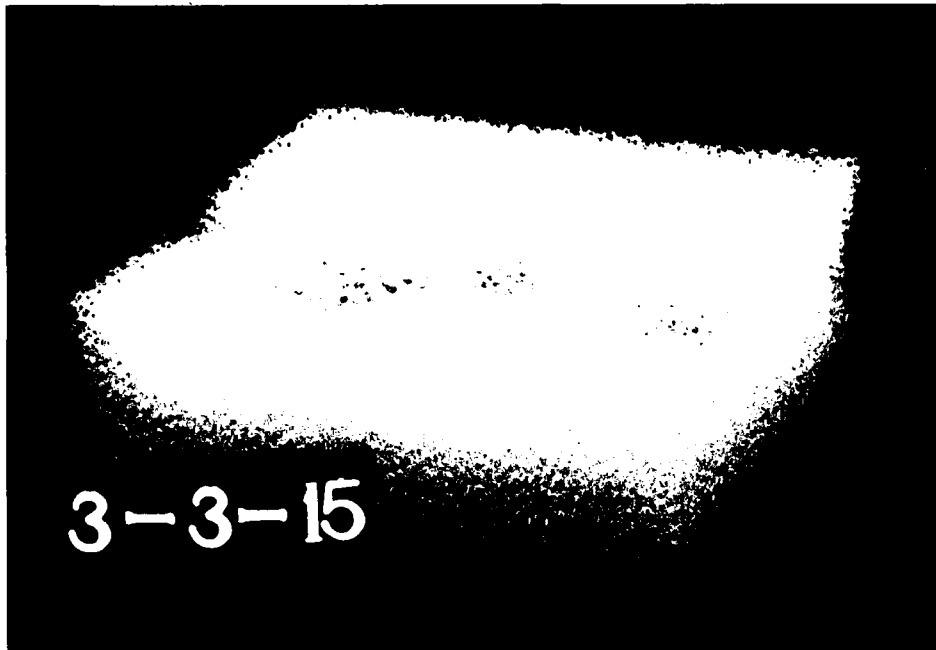


Figure A1-112. Sample 3-3-15, perspective view.

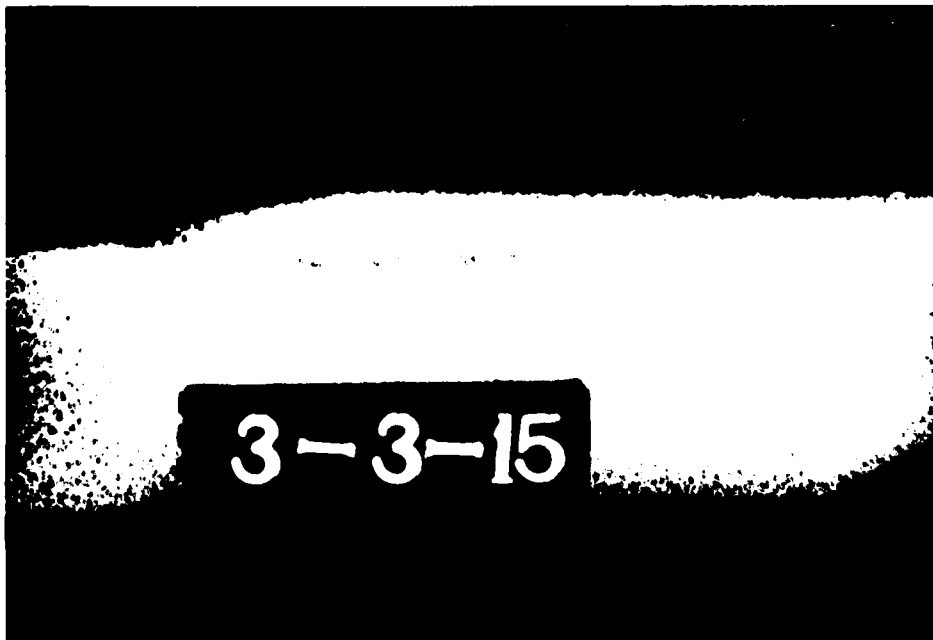


Figure A1-113. Sample 3-3-15, cross-sectional view.

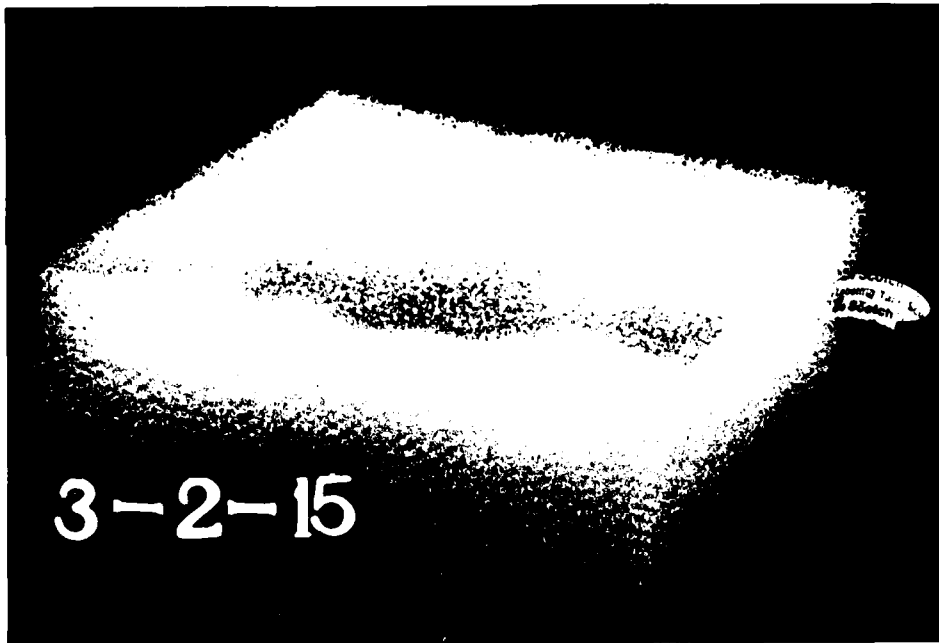


Figure A1-110. Sample 3-2-15, perspective view.

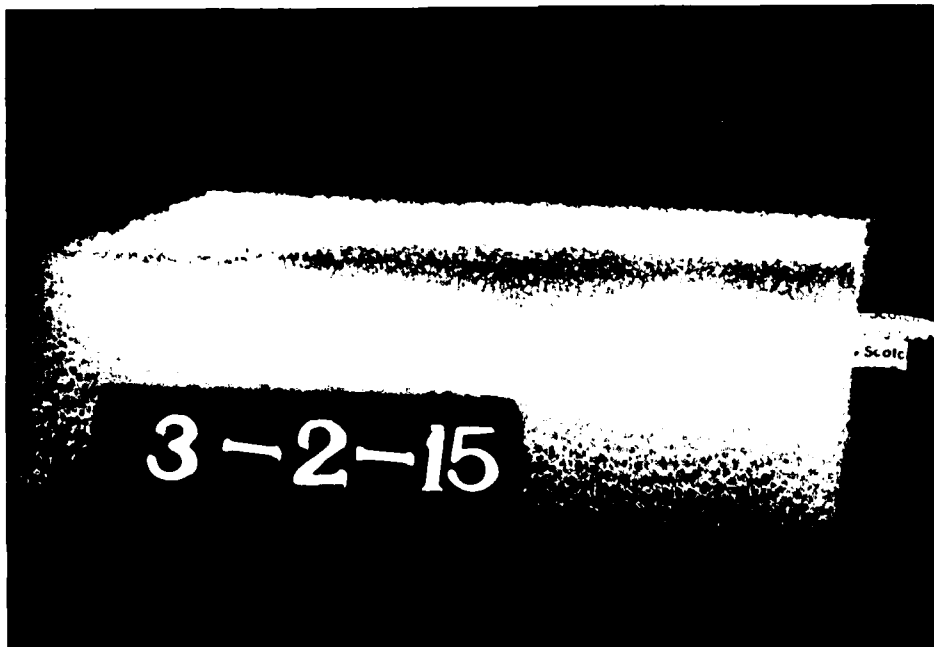


Figure A1-111. Sample 3-2-15, cross-sectional view.

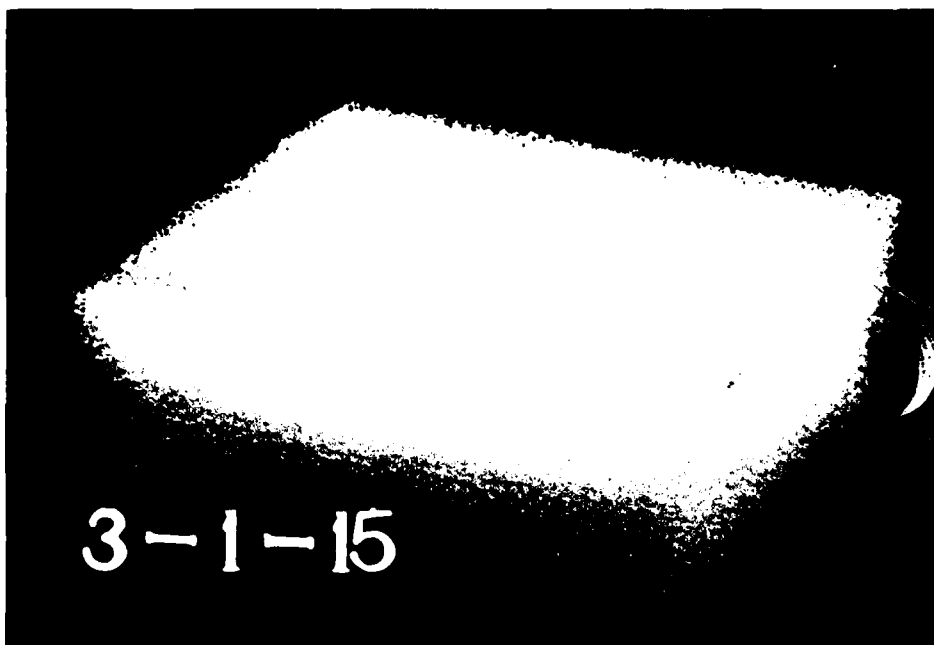


Figure A1-108. Sample 3-1-15, perspective view.

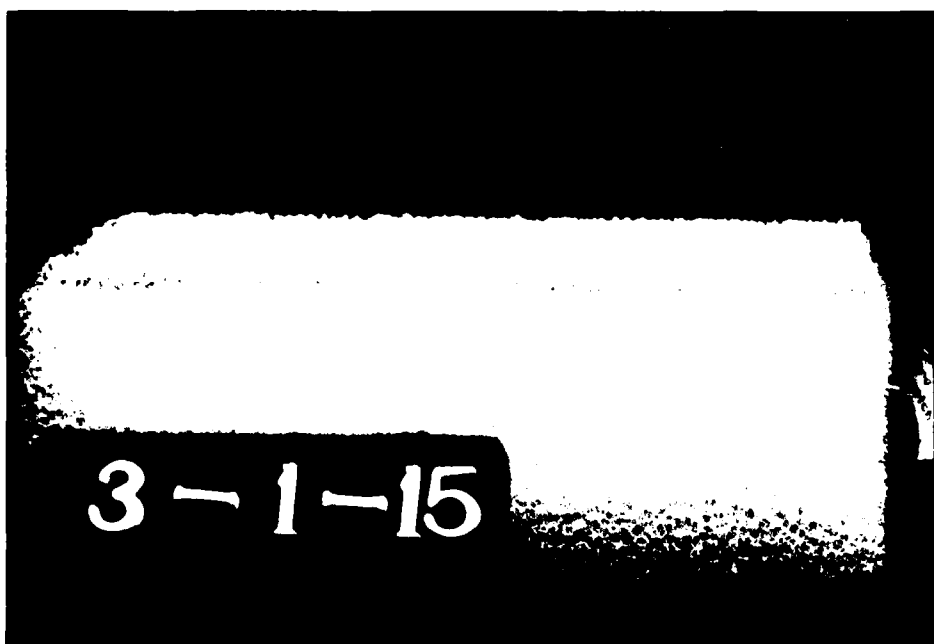


Figure A1-109. Sample 3-1-15, cross-sectional view.



Figure A1-107. Perspective view of yellow foam specimens, subjected to brief flame impingement from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively.

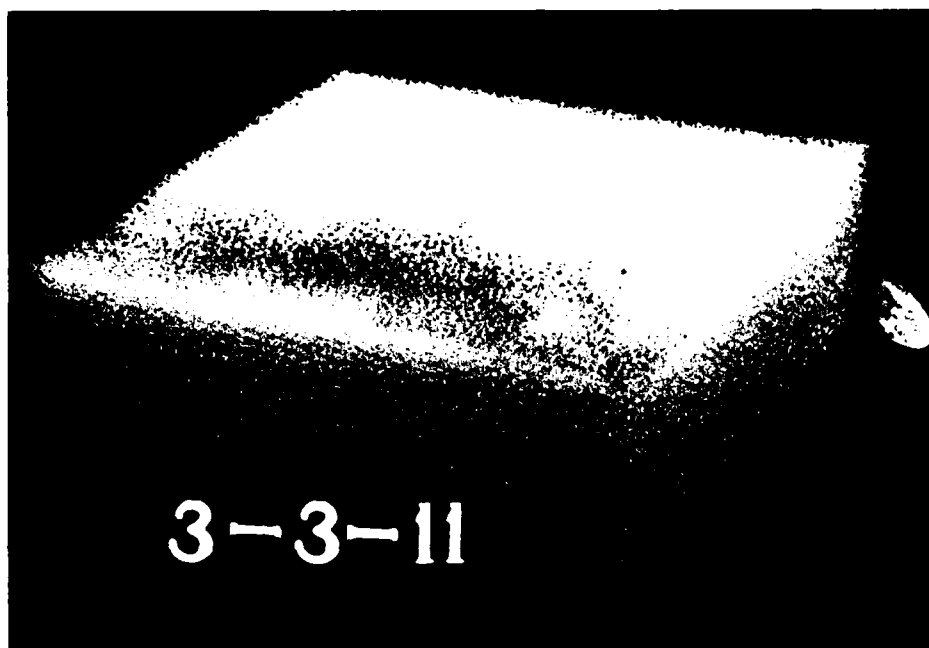


Figure A1-105. Sample 3-3-11, perspective view.

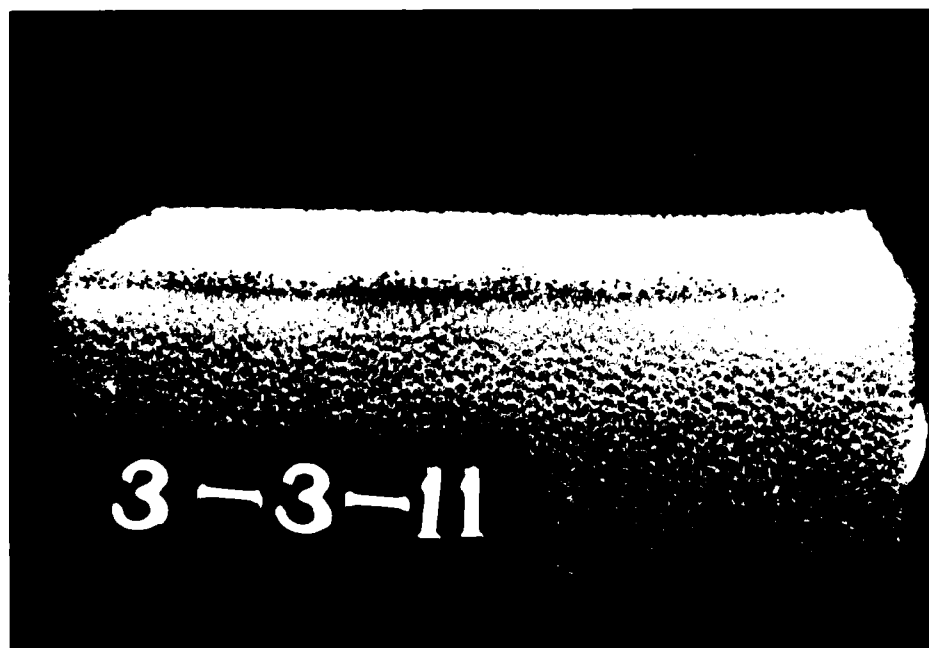


Figure A1-106. Sample 3-3-11, cross-sectional view.

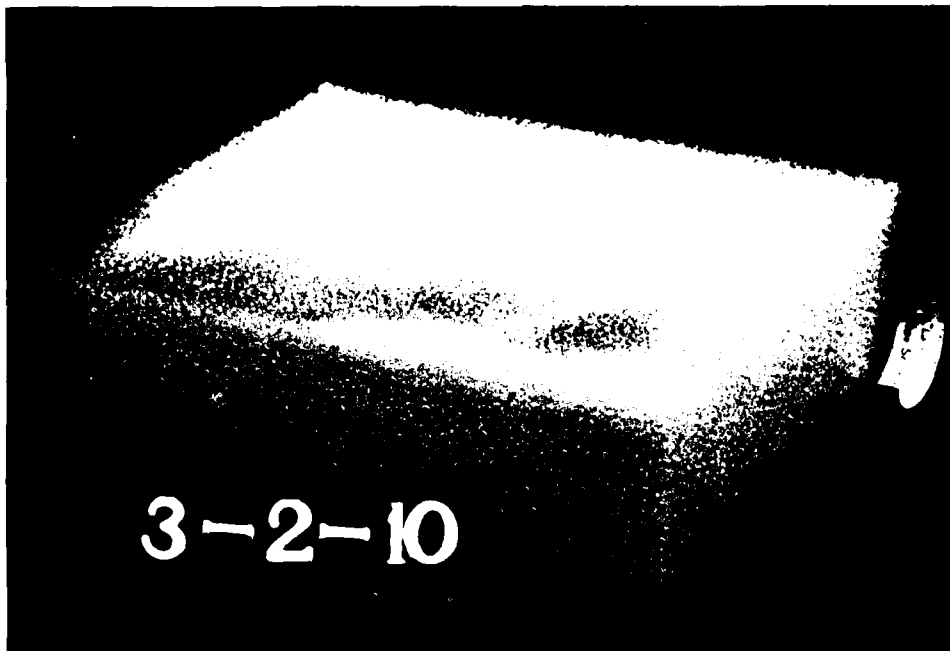


Figure A1-103. Sample 3-2-10, perspective view.

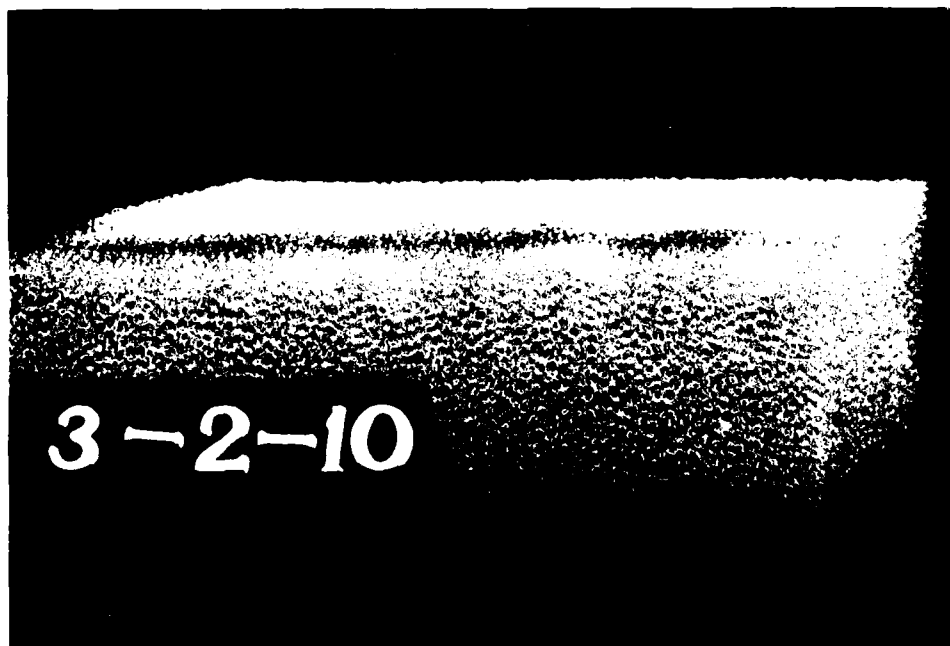


Figure A1-104. Sample 3-2-10, cross-sectional view.

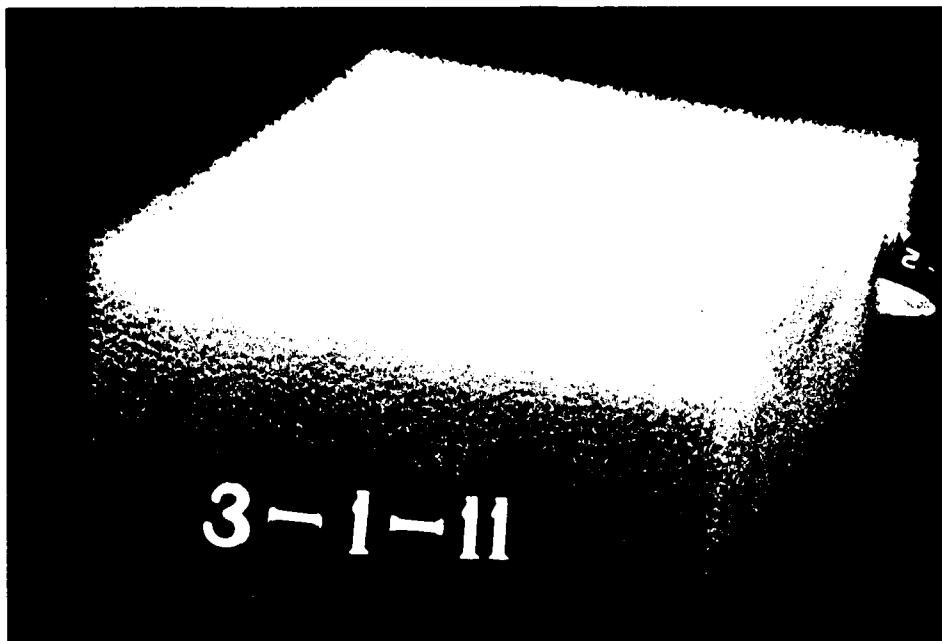


Figure A1-101. Sample 3-1-11, perspective view.

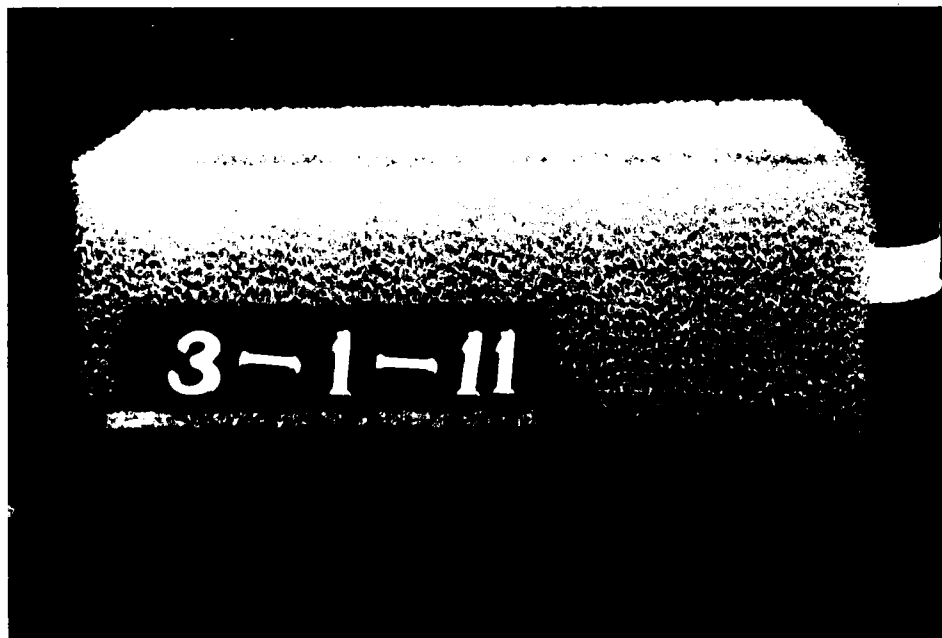


Figure A1-102. Sample 3-1-11, cross-sectional view.

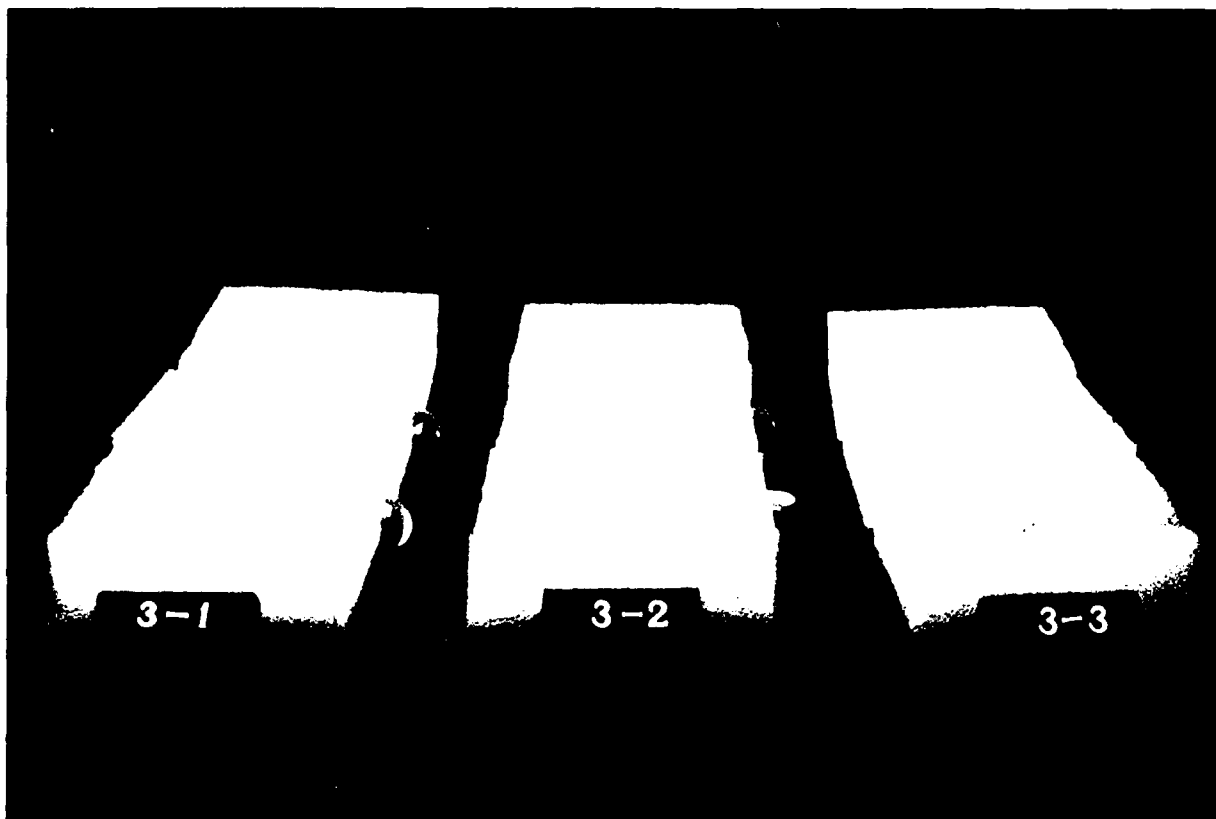


Figure A1-100. Perspective view of red foam specimens, subjected to brief flame impingement from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively.

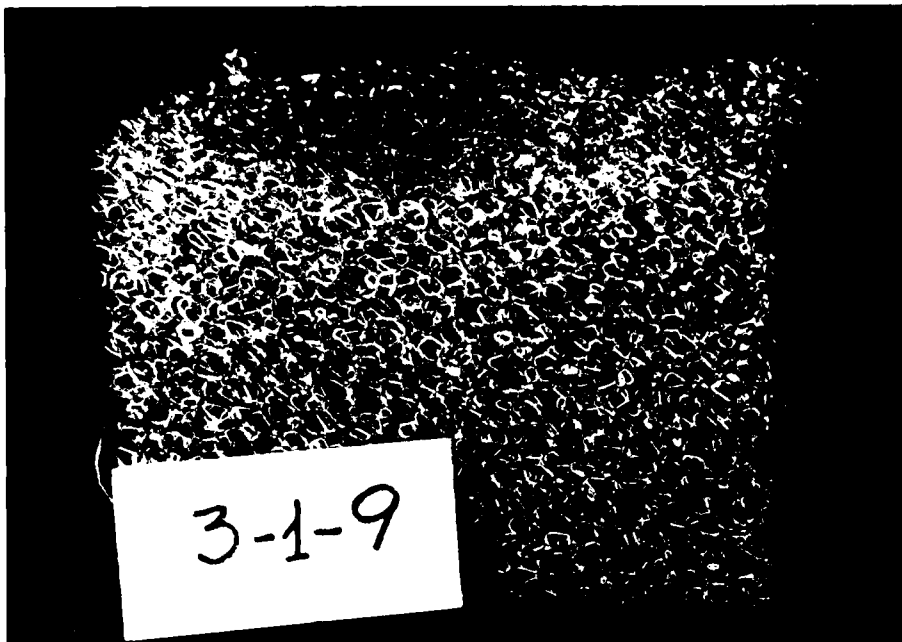


Figure A1-98. Sample 3-1-9 (dry, aged foam), perspective view.

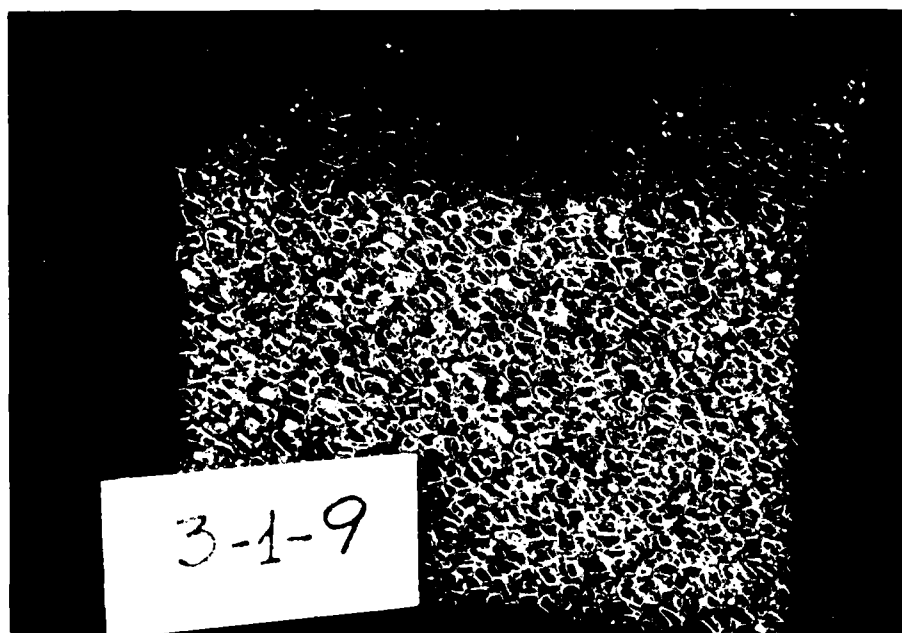


Figure A1-99. Sample 3-1-9 (dry, aged foam), cross-sectional view.

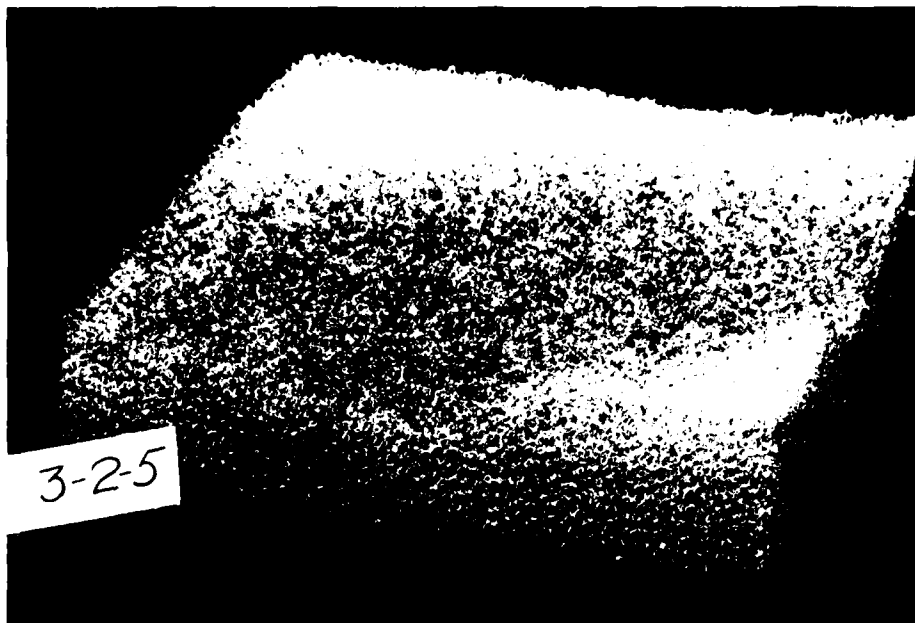


Figure A1-96. Sample 3-2-5 (wet, new foam), perspective view.

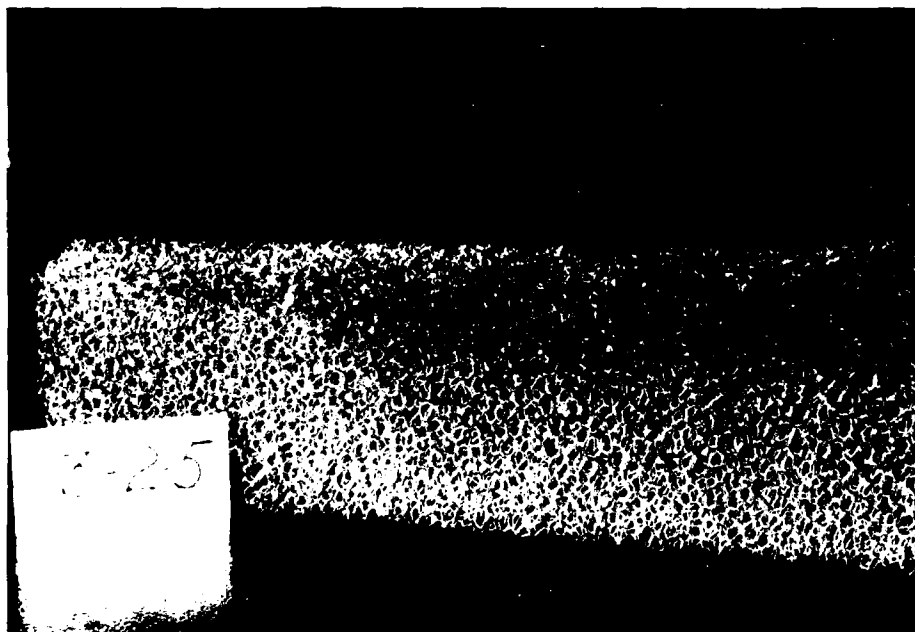


Figure A1-97. Sample 3-2-5 (wet, new foam), cross-sectional view.

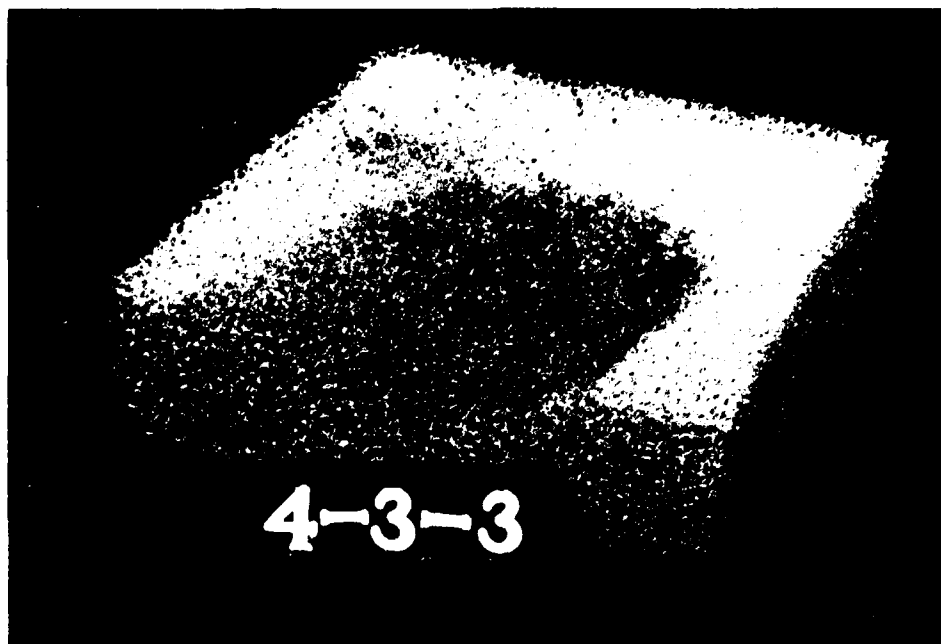


Figure A1-120. Sample 4-3-3, perspective view.

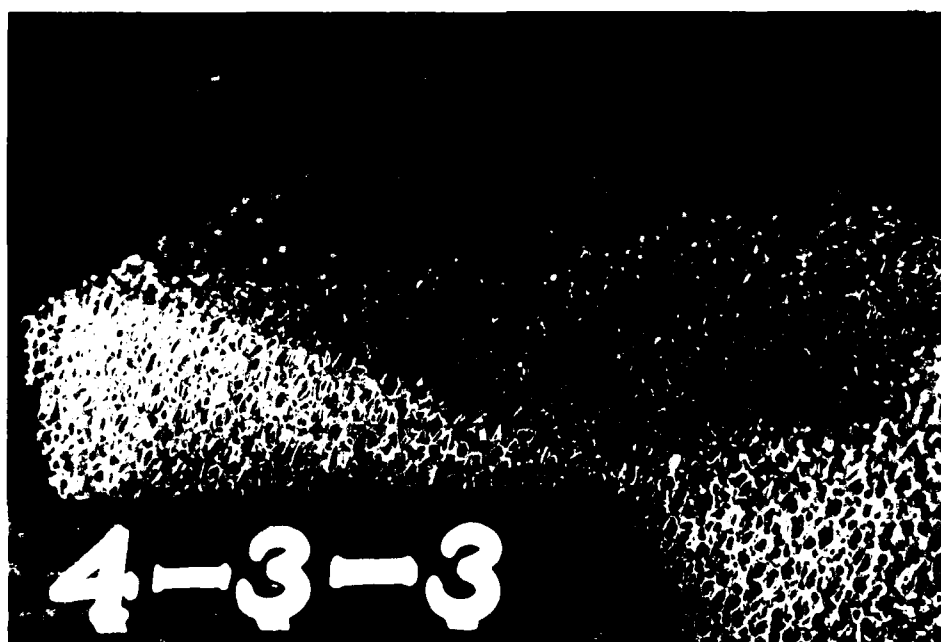


Figure A1-121. Sample 4-3-3, cross-sectional view.



Figure A1-122. Sample 4-1-4 (wet, new foam), perspective view.

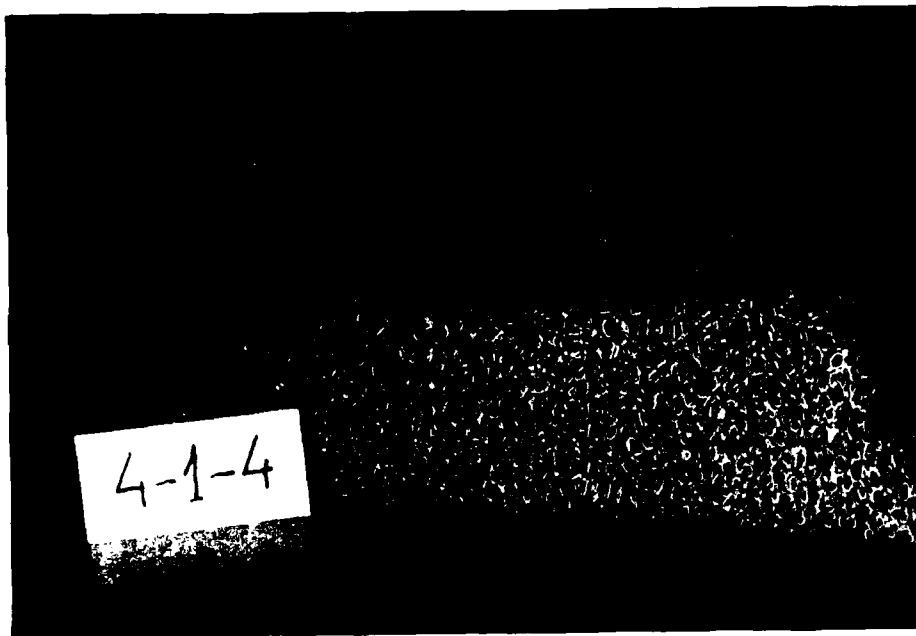


Figure A1-123. Sample 4-1-4 (wet, new foam), cross-sectional view.

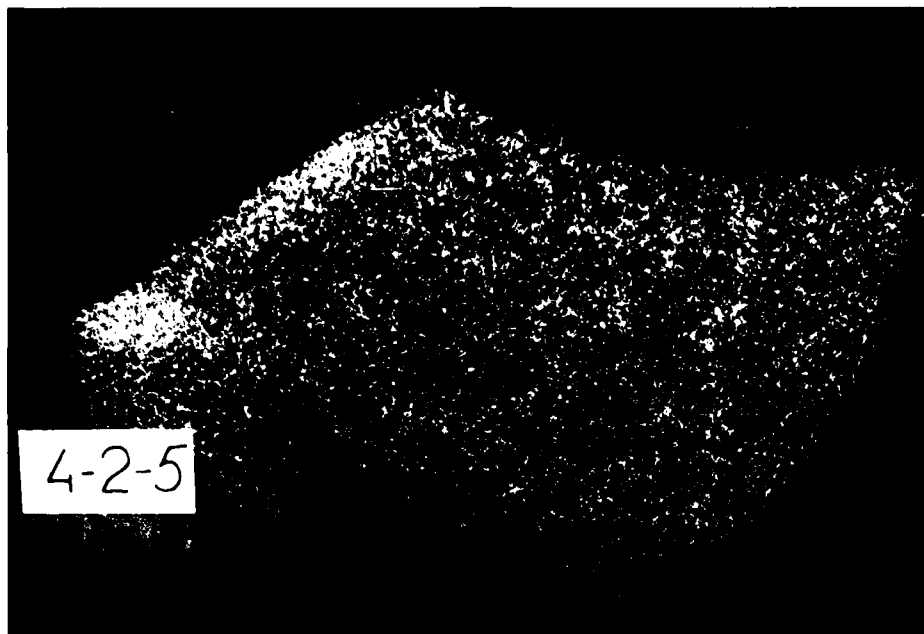


Figure A1-124. Sample 4-2-5 (wet, new foam), perspective view.

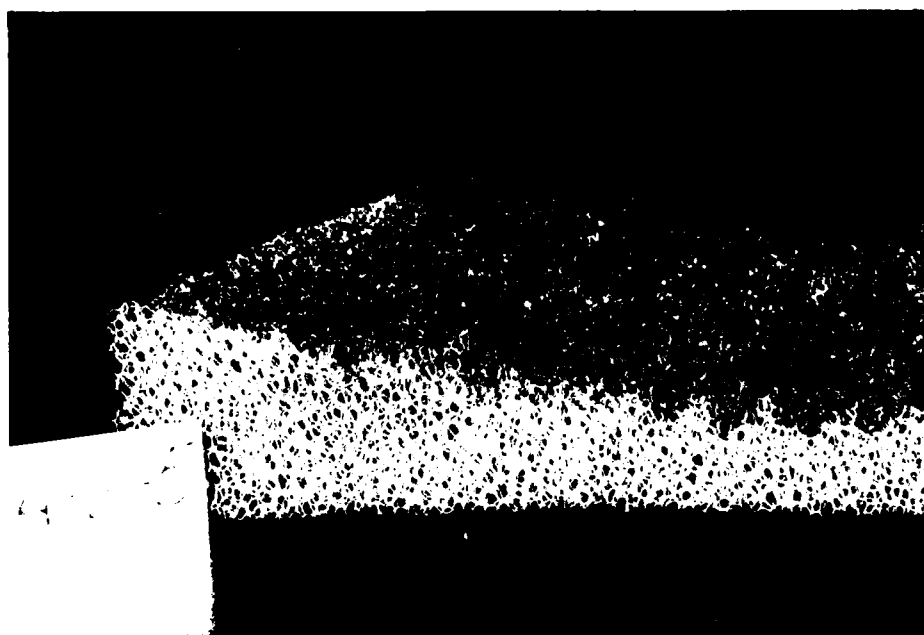


Figure A1-125. Sample 4-2-5 (wet, new foam), cross-sectional view.

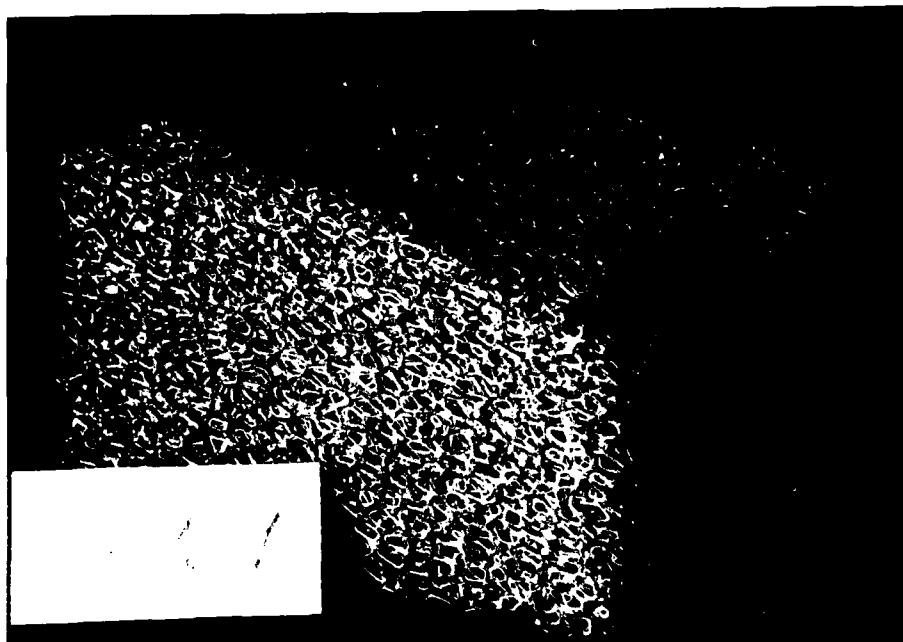


Figure A1-126. Sample 4-1-9 (aged, dry foam), perspective view.

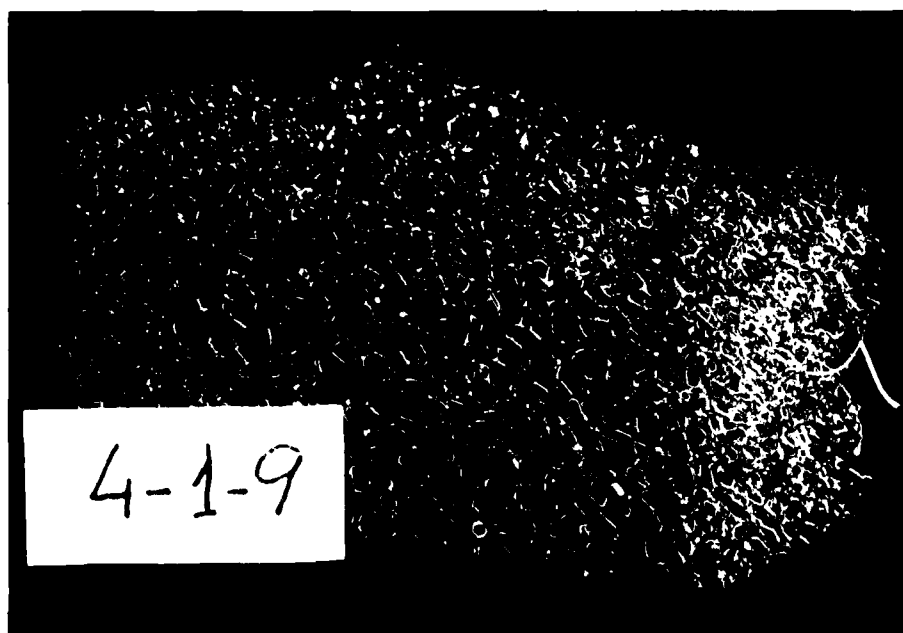


Figure A1-127. Sample 4-1-9 (aged, dry foam), cross-sectional view.

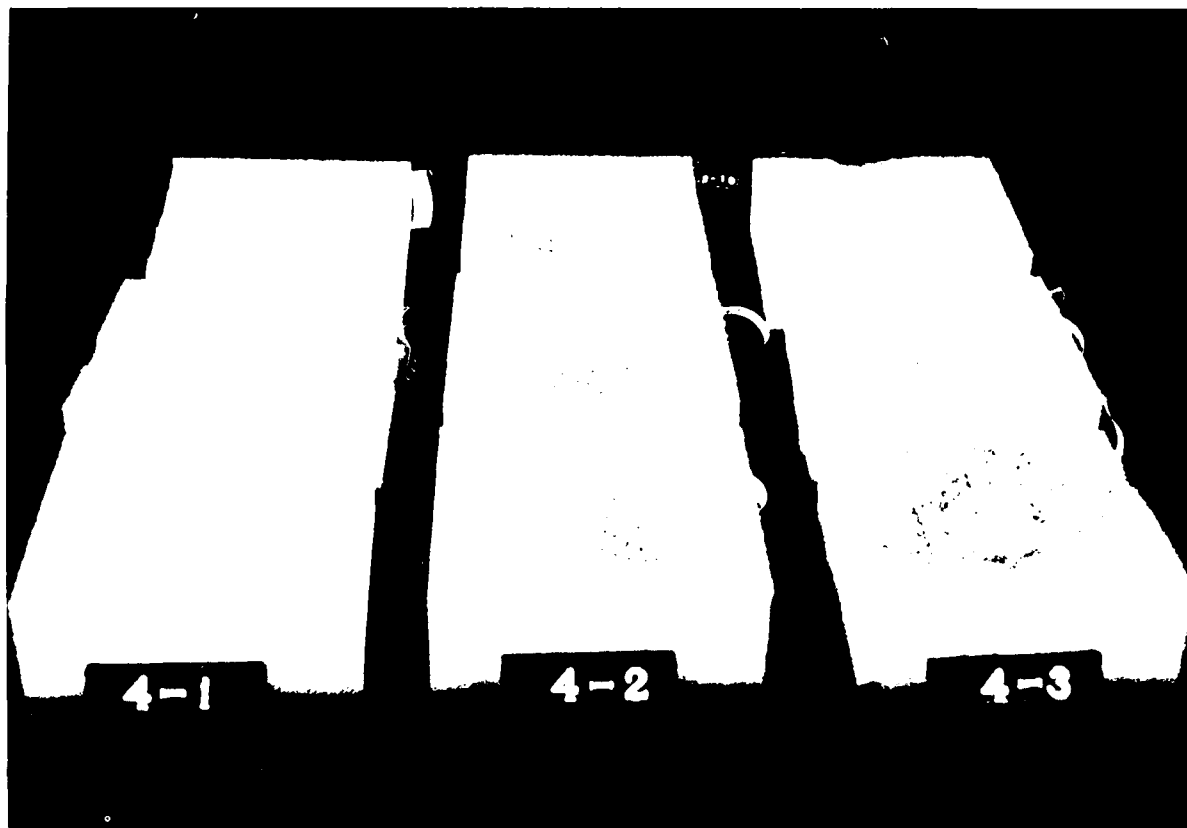


Figure A1-128. Perspective view of red foam specimens, subjected to sustained burning. Samples ignited by flame from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively.

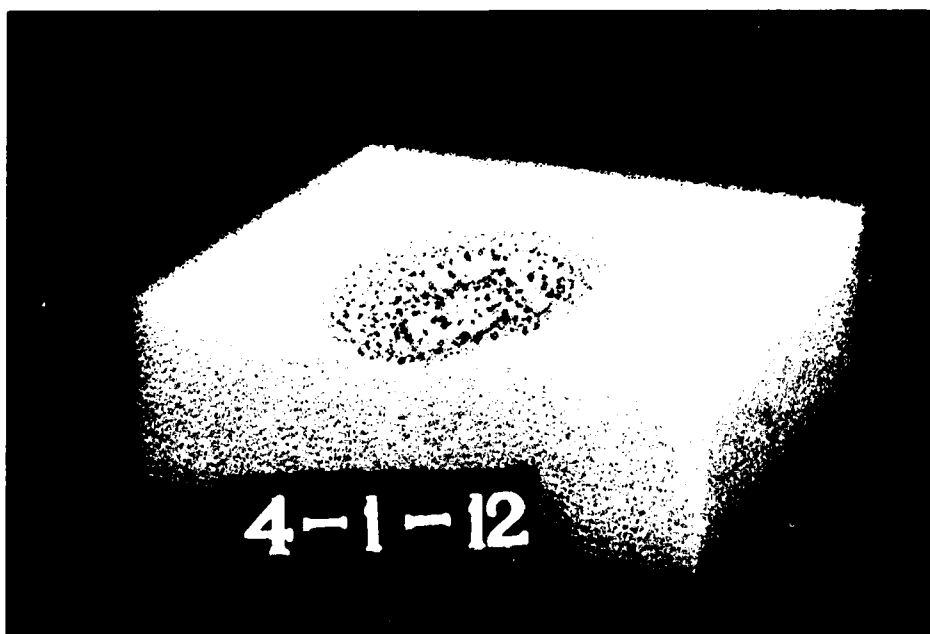


Figure A1-129. Sample 4-1-12, perspective view.

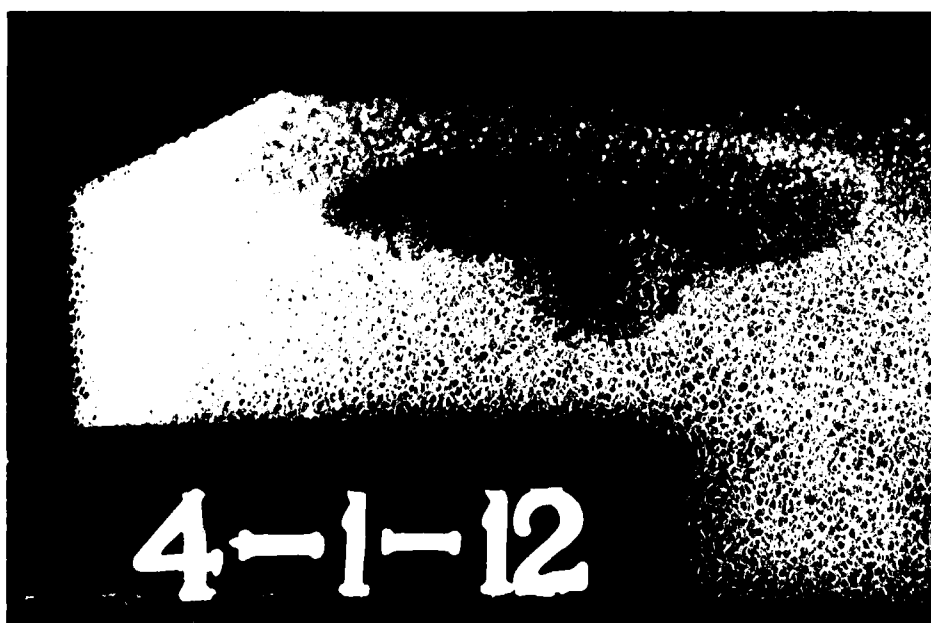


Figure A1-130. Sample 4-1-12, cross-sectional view.

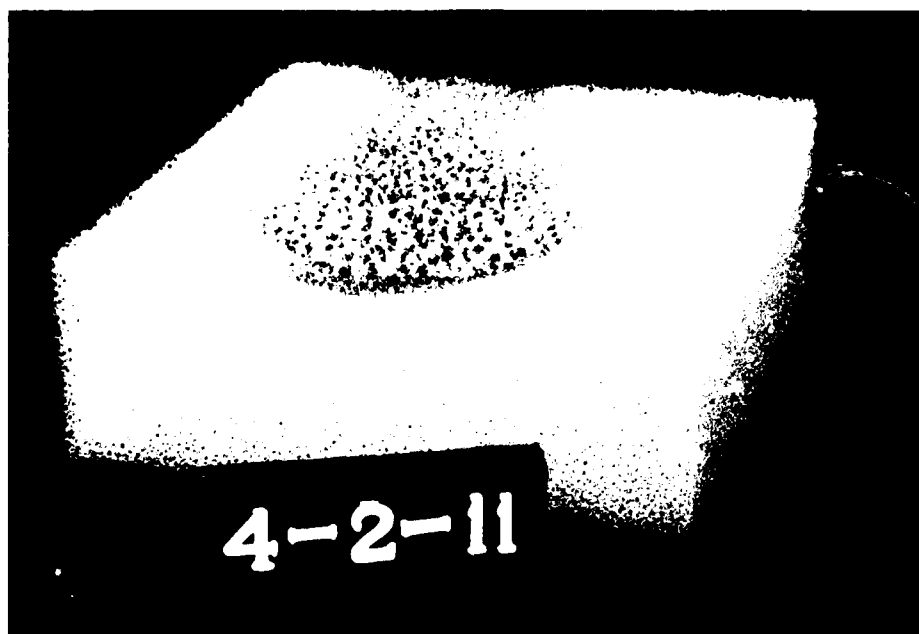


Figure A1-131. Sample 4-2-11, perspective view.

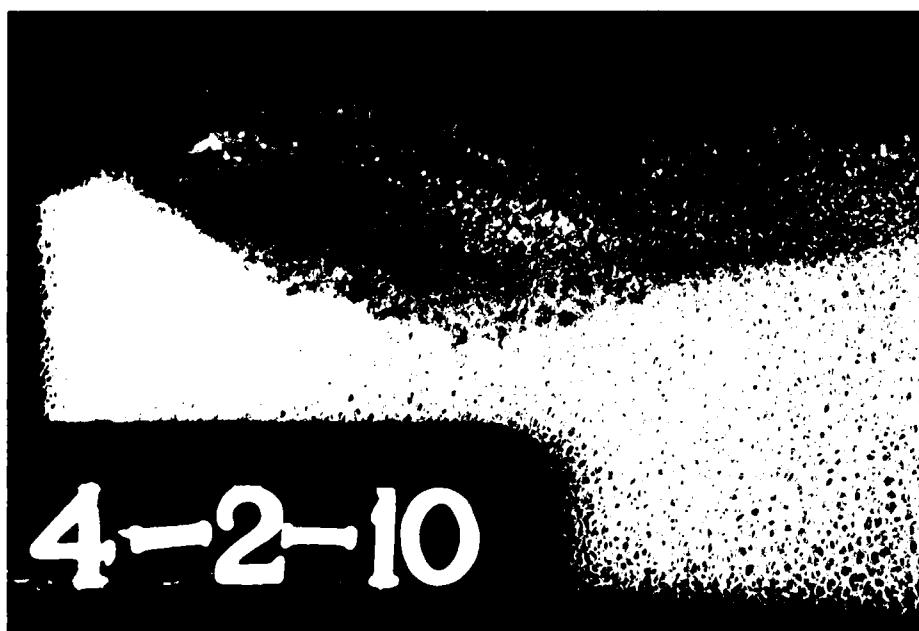


Figure A1-132. Sample 4-2-10, cross-sectional view.

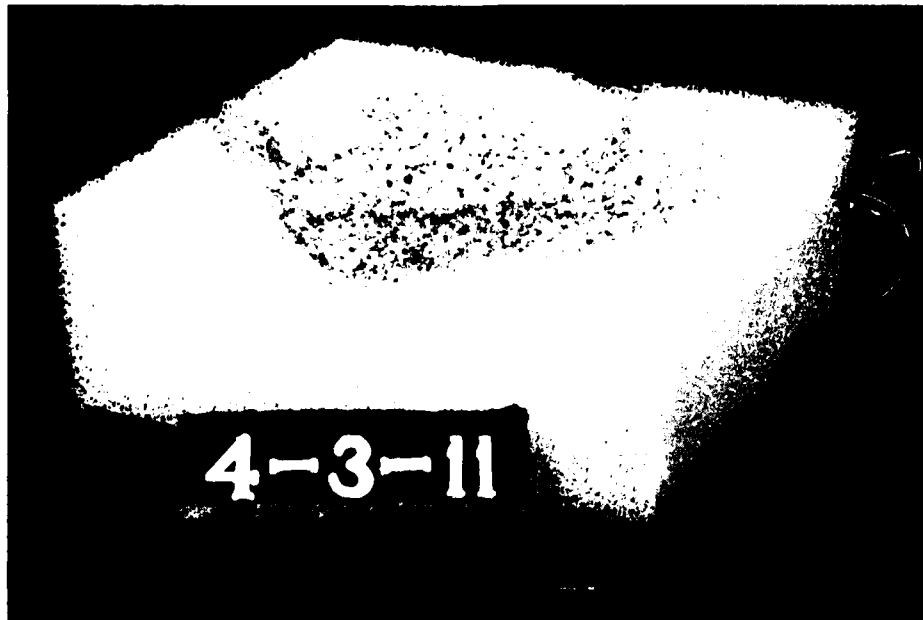


Figure A1-133. Sample 4-3-11, perspective view.



Figure A1-134. Sample 4-3-11, cross-sectional view.

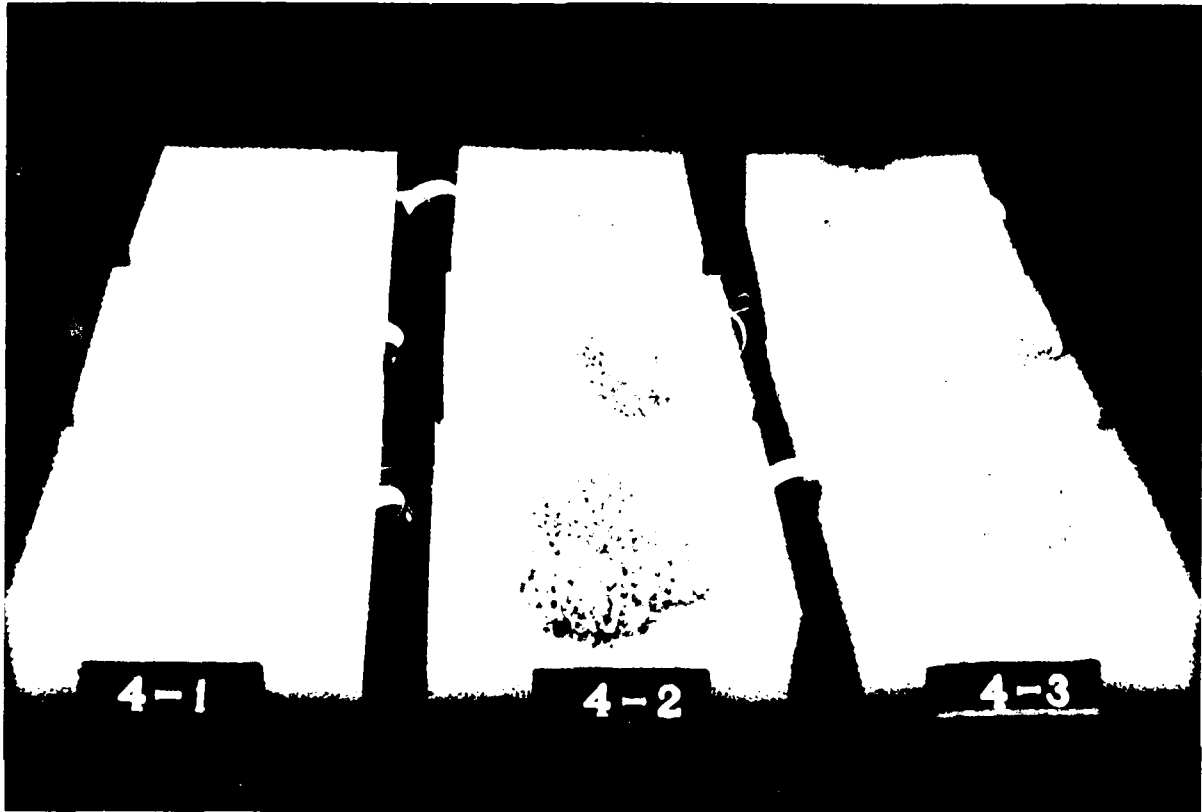


Figure A1-135. Perspective view of yellow foam specimens, subjected to sustained burning. Samples ignited by flame from top while in horizontal position, and from bottom while in vertical and horizontal positions, respectively.

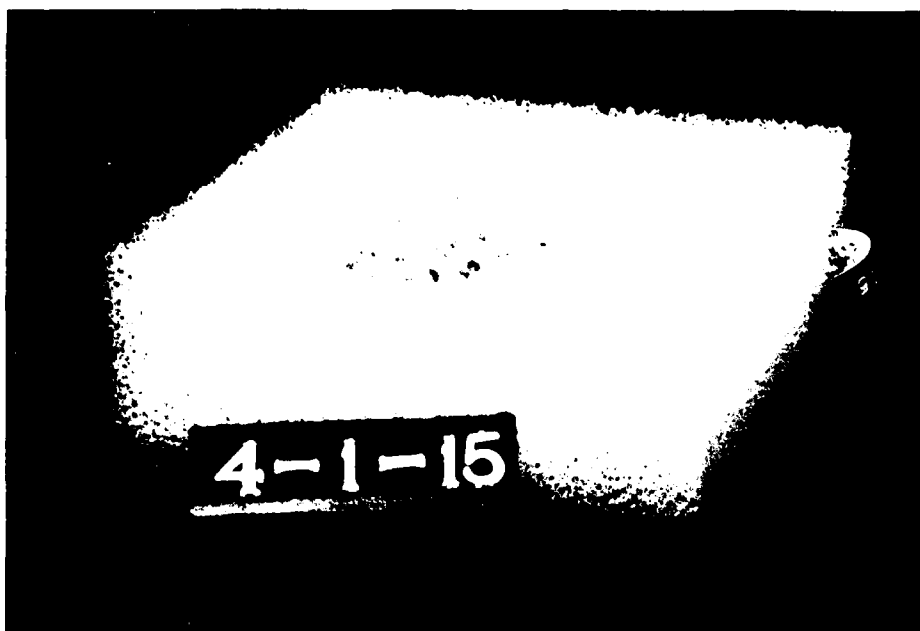


Figure A1-136. Sample 4-1-15, perspective view.



Figure A1-137. Sample 4-1-15, cross-sectional view.

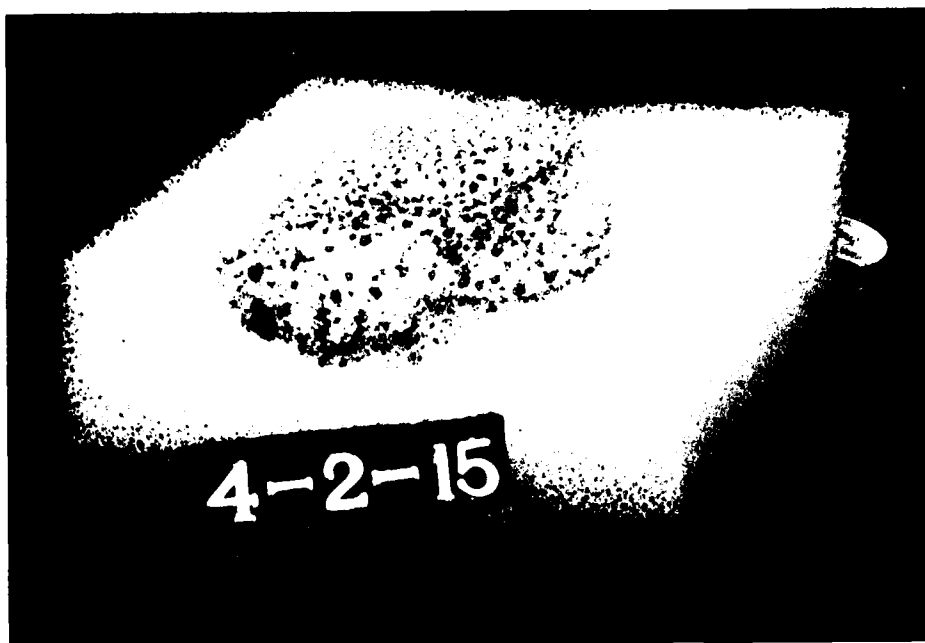


Figure A1-138. Sample 4-2-15, perspective view.

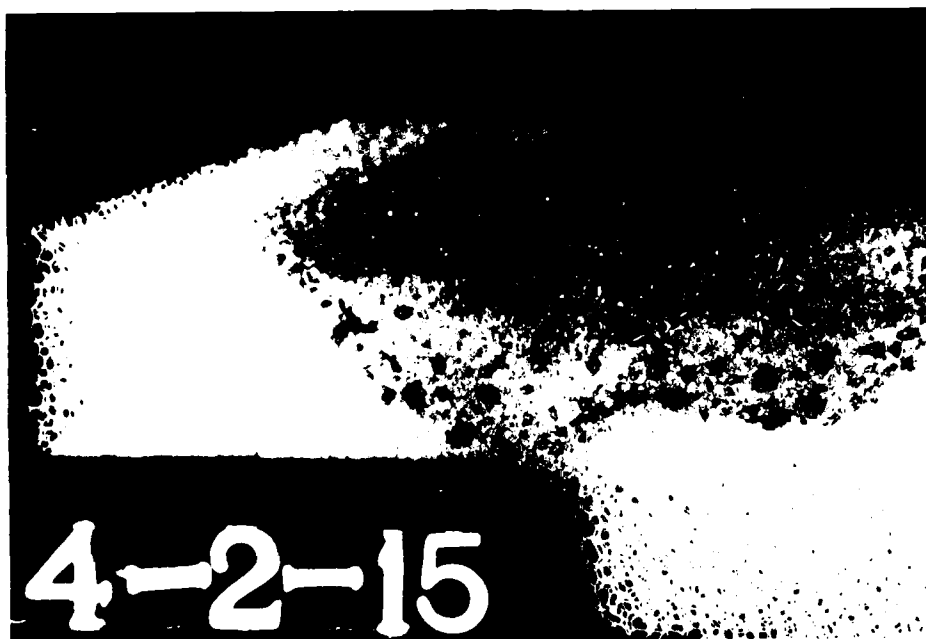


Figure A1-139. Sample 4-2-15, cross-sectional view.

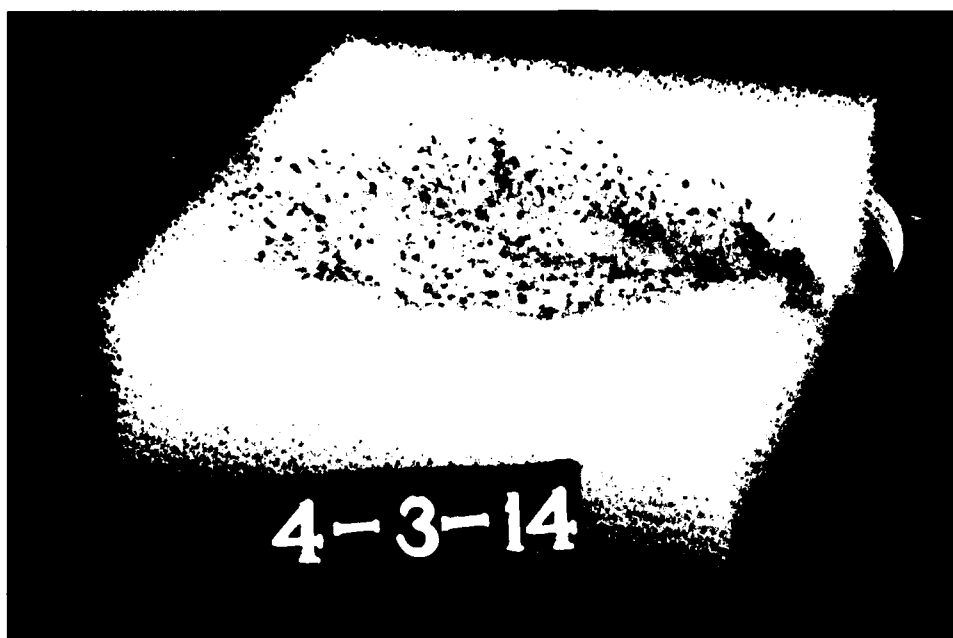


Figure A1-140. Sample 4-3-14, cross-sectional view.

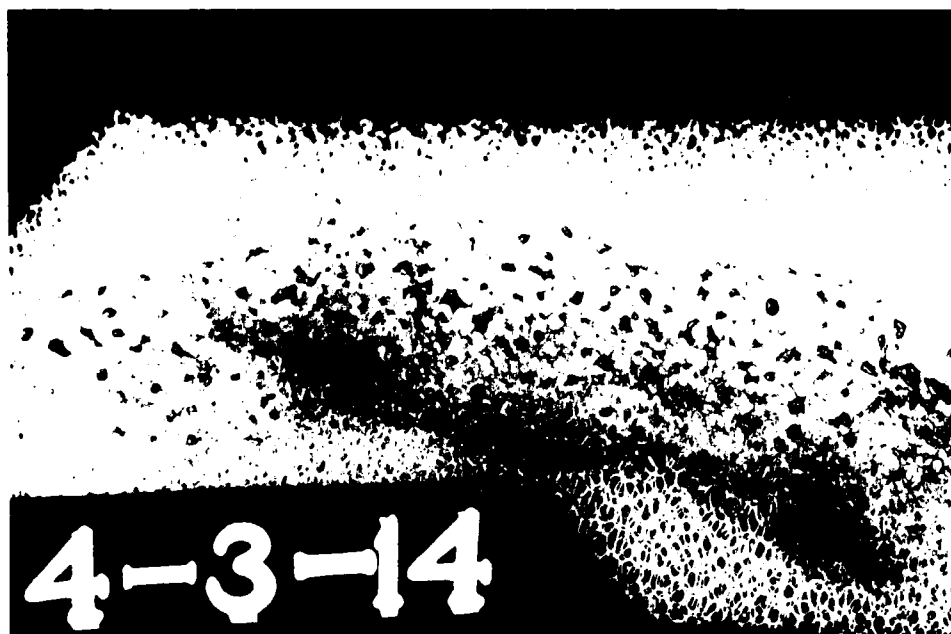


Figure A1-141. Sample 4-3-14, perspective view.

A1.10. FIGURES DEPICTING FOAM SAMPLES
FROM FLASH FIRE EXPERIMENTS

Simulated flash fire exposure specimens are identified in Table A1-9. The positions which the samples occupied in the flame tube are shown in Figures A1-142 and A1-143.

TABLE A1-9. FLASH FIRE TESTS WITH FLAME TUBE^a

Experiment number	Sample designation	Foam specimen	Propane conc., vol.-%	Initial pressure, psia
1	1-1-1	Blue, coarse, dry	3.5	14.4
1	1-A-1	Blue, coarse, dry	3.5	14.4
5	1-1-5	Blue, coarse, dry	5.0	17.7
5	1-2-5	Blue, coarse, dry	5.0	17.7
7	1-D-7	Blue, coarse, dry	6.5	17.7
10	1-D-10	Blue, coarse, dry	6.5	14.4
11	1-1-11	Yellow, dry	3.5	14.4
12	1-1-12	Yellow, dry	5.0	14.4
14	1-1-14	Red, dry	3.5	14.4
16	1-1-16	Red, dry	6.5	14.4
17	1-1-17	Blue, coarse, dry, aged 80 hours in sunlight	3.5	14.4
20	1-1-20	Blue, coarse, wetted with JP-5	3.5	14.4
22	1-1-22	Blue, coarse, wetted with JP-5	2.0	14.2
23	1-1-23	Yellow, wetted with JP-5	3.5	14.3
25	1-1-25	Yellow, wetted with JP-5	2.0	14.3
26	1-A-26	Blue, coarse, dry	3.5	14.3
28	1-3-28	Blue, coarse, dry	6.5	14.3
31	1-3-31	Red, dry	6.5	14.4
34	1-3-34	Yellow, dry	6.5	14.4
37	1-3-37	Blue, coarse,	6.5	14.3
39	1-E-39	Yellow, wetted with JP-5	5.0	14.4
40	1-3-40	Yellow, wetted with JP-5	6.5	14.4
43	1-3-43	Red, wetted with JP-5	6.5	14.3

^aTests 1-25 were unvented; tests 26-43 were vented. The total void volume in unvented tests was 20% (10% for each void). The vent tube increased the void volume to 22% in vented tests.

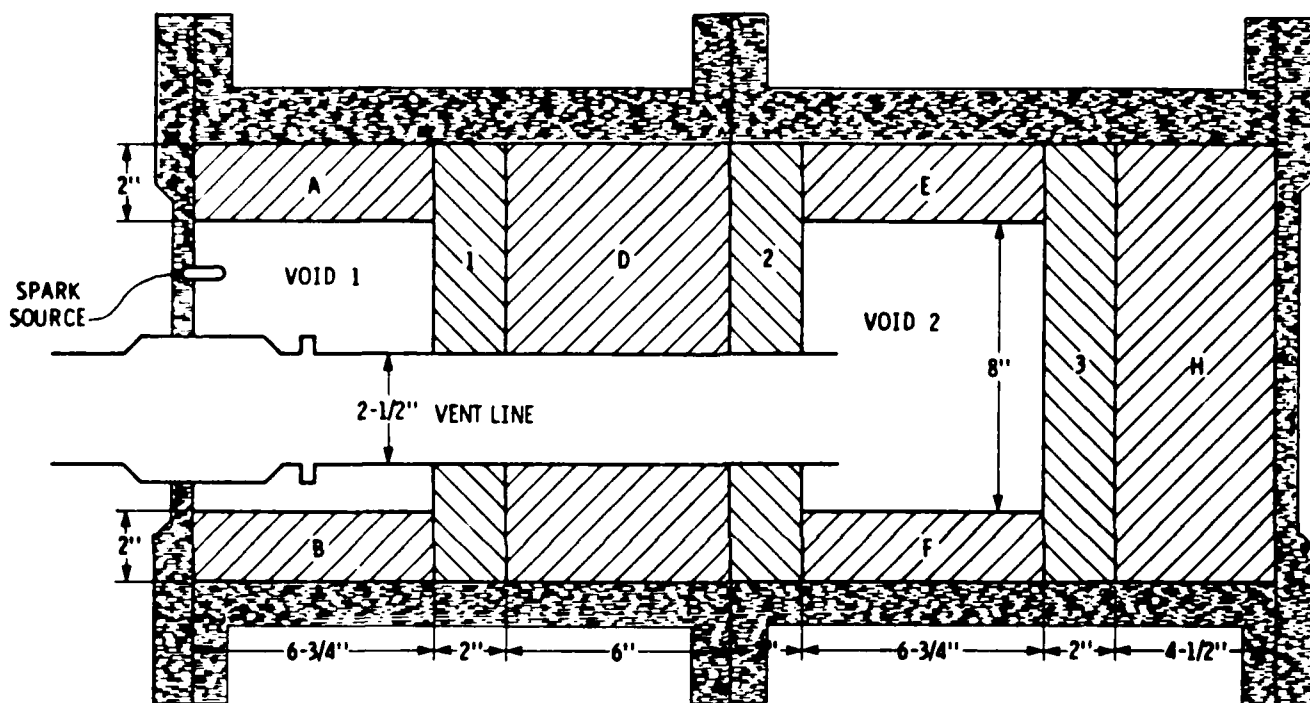


Figure A1-143. Cross-sectional view of flame tube in vented configuration. (Dashed areas represent polyurethane foam.)

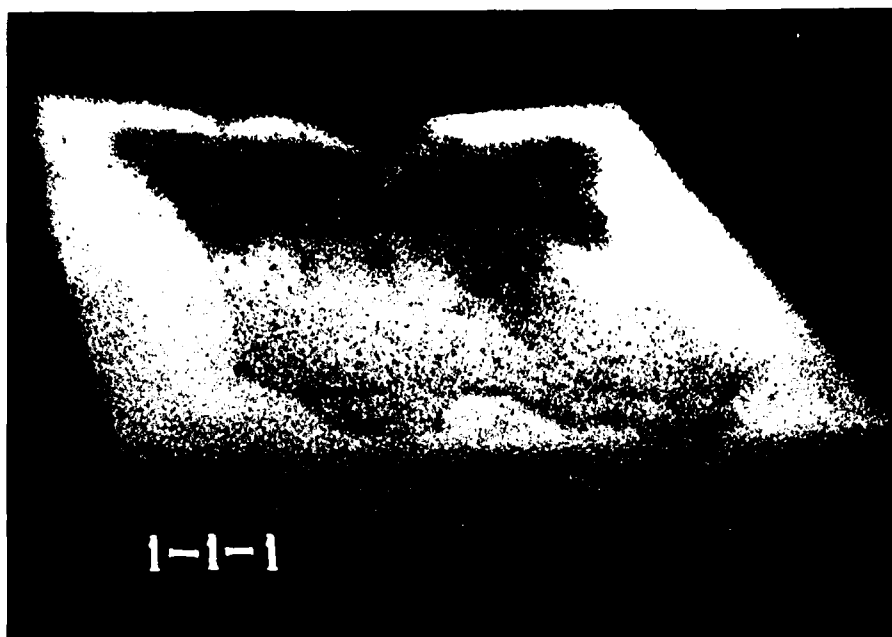


Figure A1-144. Sample 1-1-1, perspective front view.

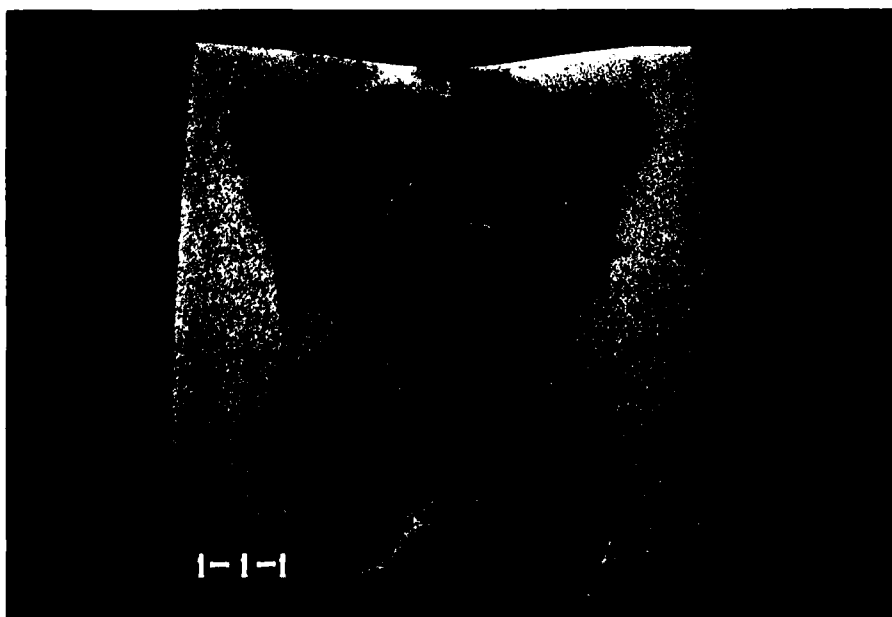


Figure A1-145. Sample 1-1-1, direct front view.



Figure A1-146. Sample 1-1-1, close-up front view.

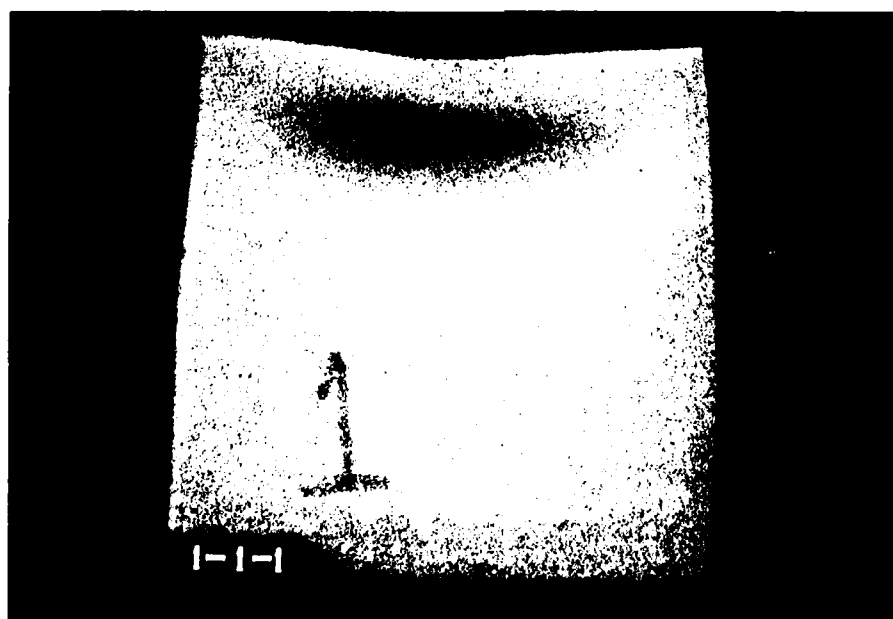


Figure A1-147. Sample 1-1-1, direct rear view.

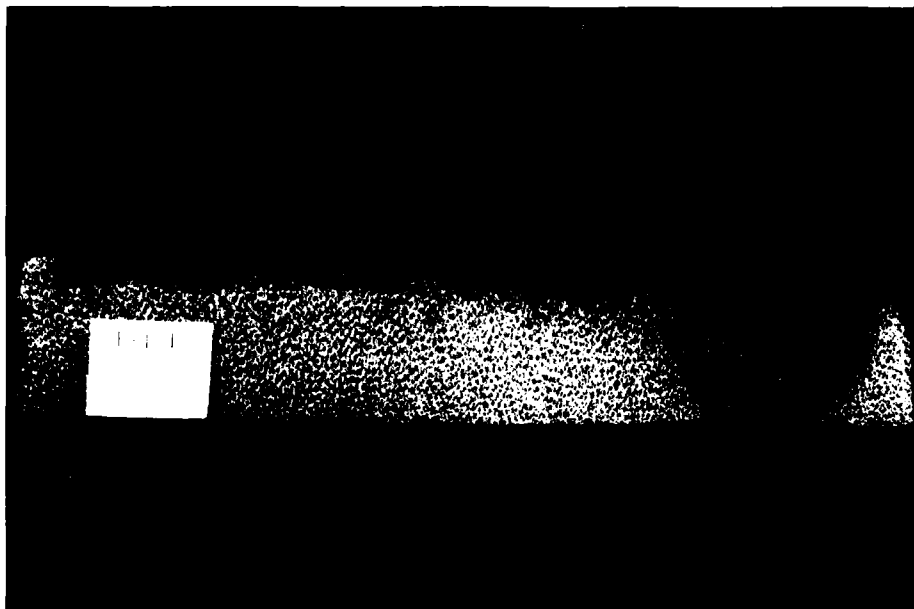


Figure A1-148. Sample 1-1-1, cross-sectional view.

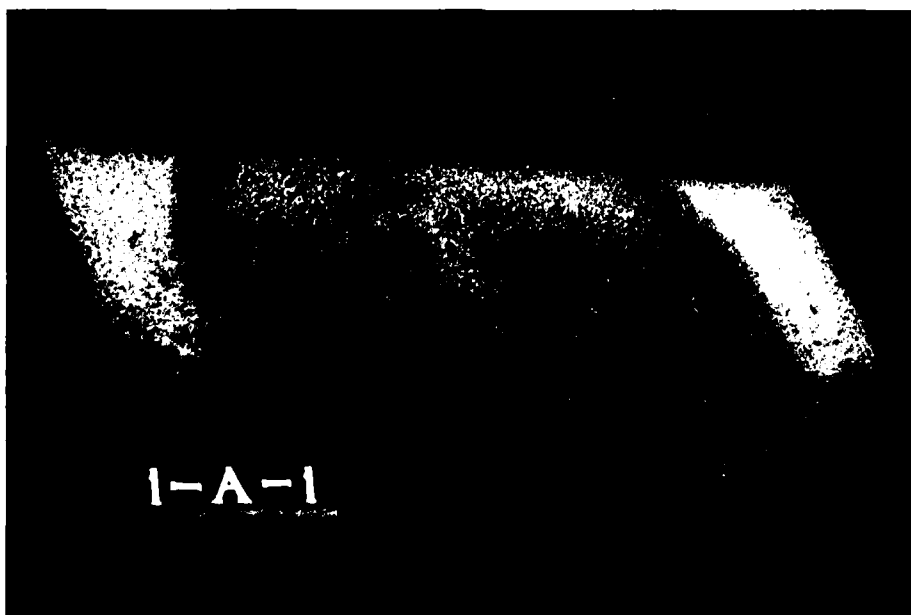


Figure A1-149. Sample 1-A-1, perspective front view.

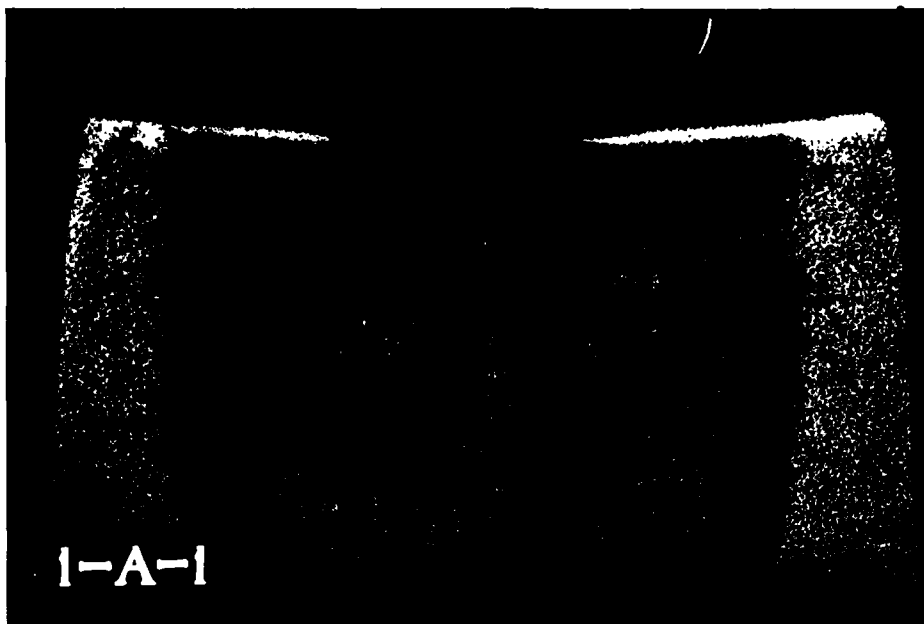


Figure A1-150. Sample 1-A-1, direct front view.

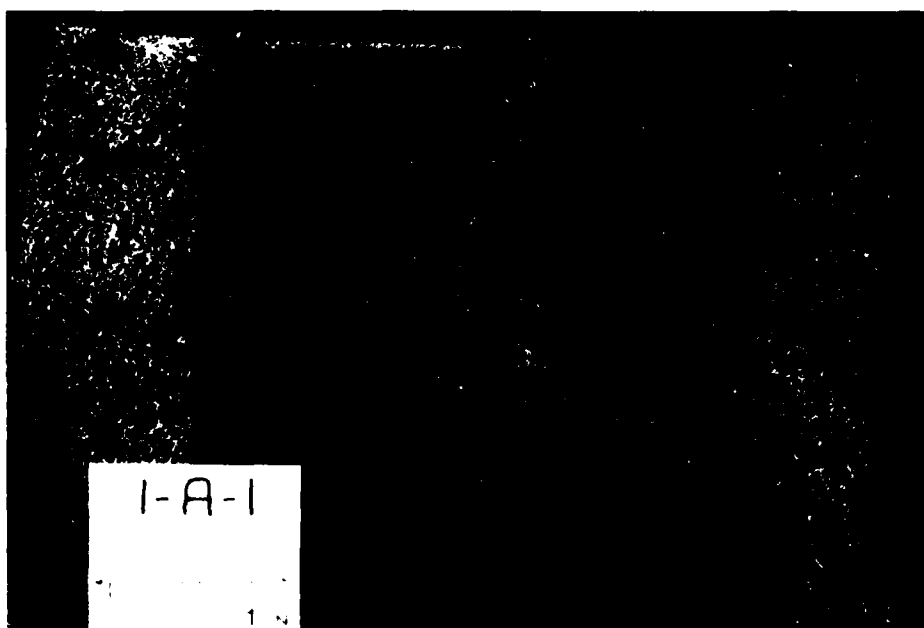


Figure A1-151. Sample 1-A-1, close-up front view, upper left corner.

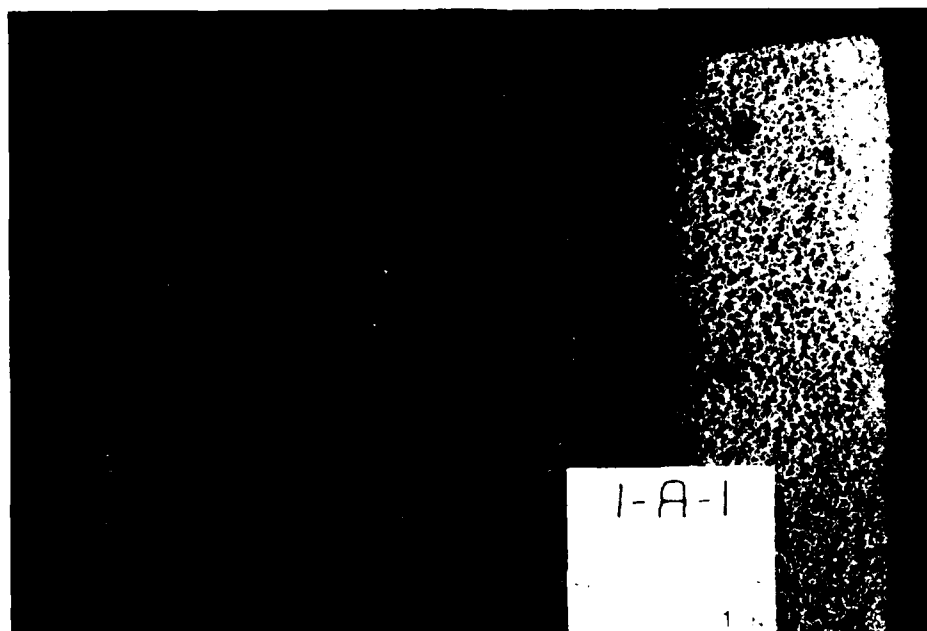


Figure A1-152. Sample 1-A-1, close-up front view, upper right corner.

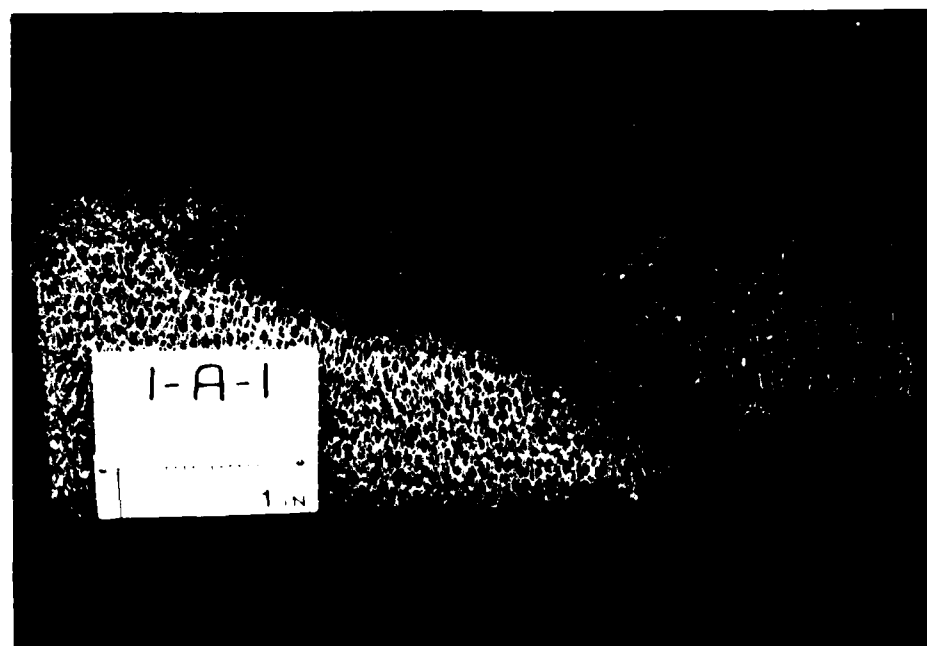


Figure A1-153. Sample 1-A-1, cross-sectional view, upper left corner.

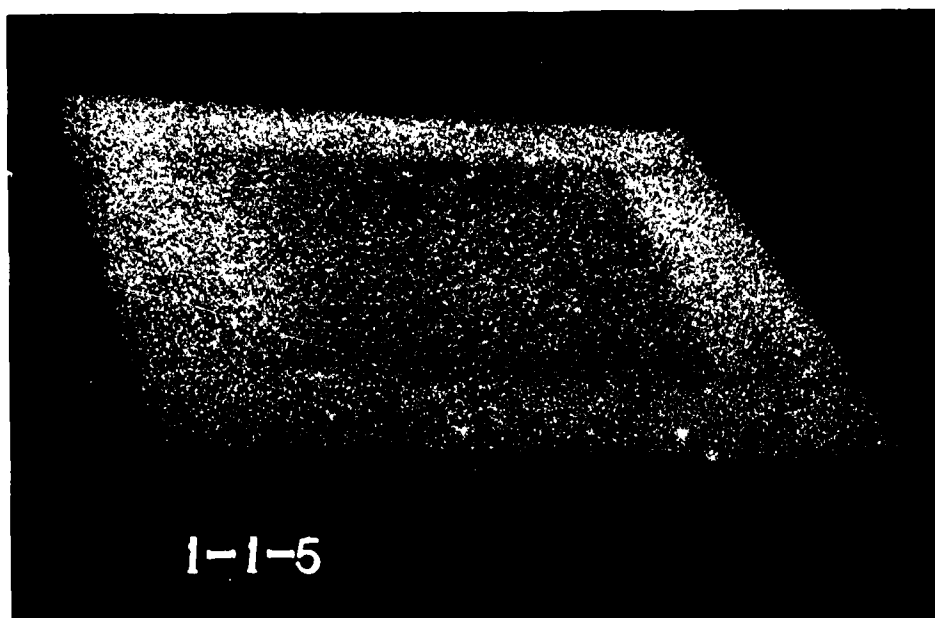


Figure A1-154. Sample 1-1-5, perspective front view.

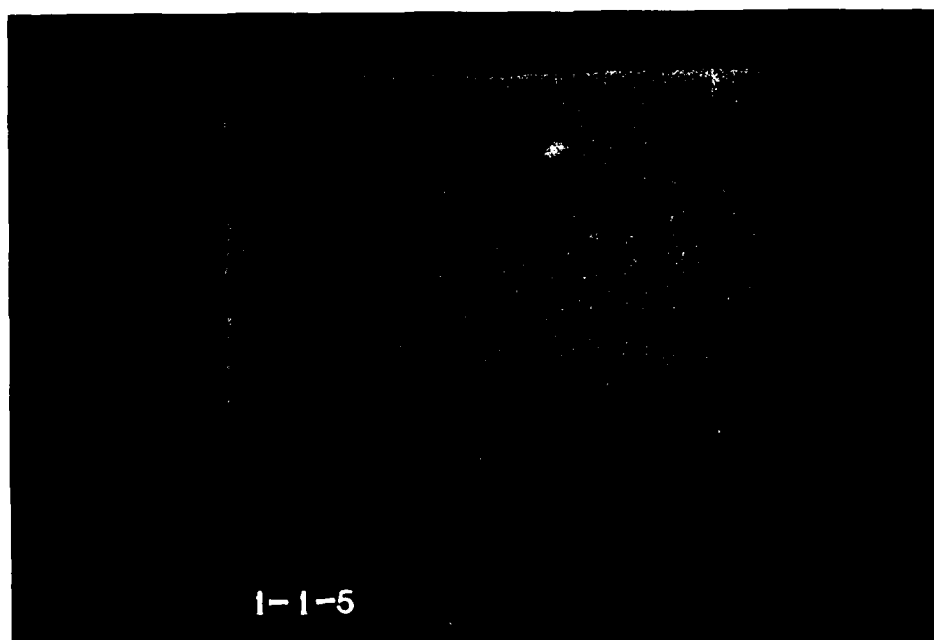


Figure A1-155. Sample 1-1-5, direct front view.

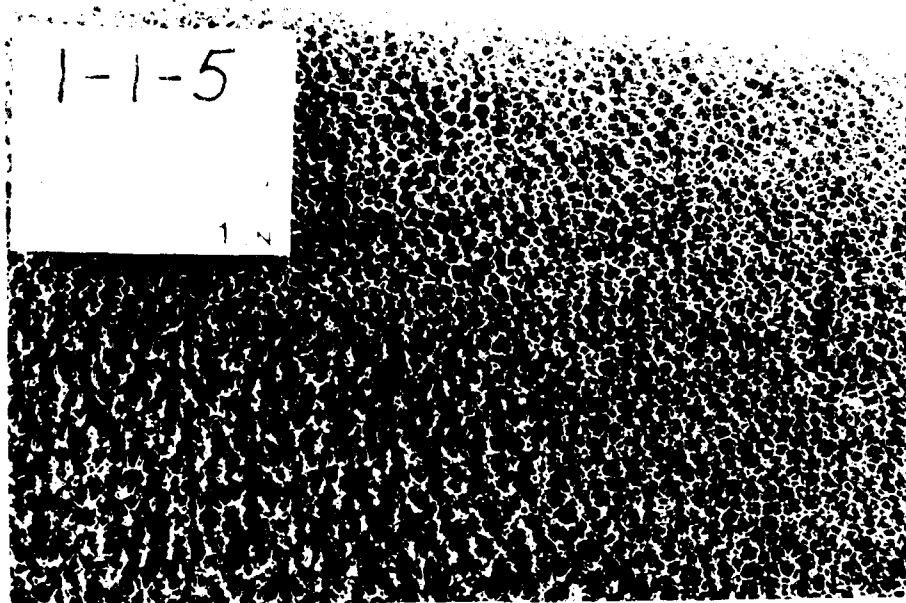


Figure A1-156. Sample 1-1-5, close-up view of front surface.

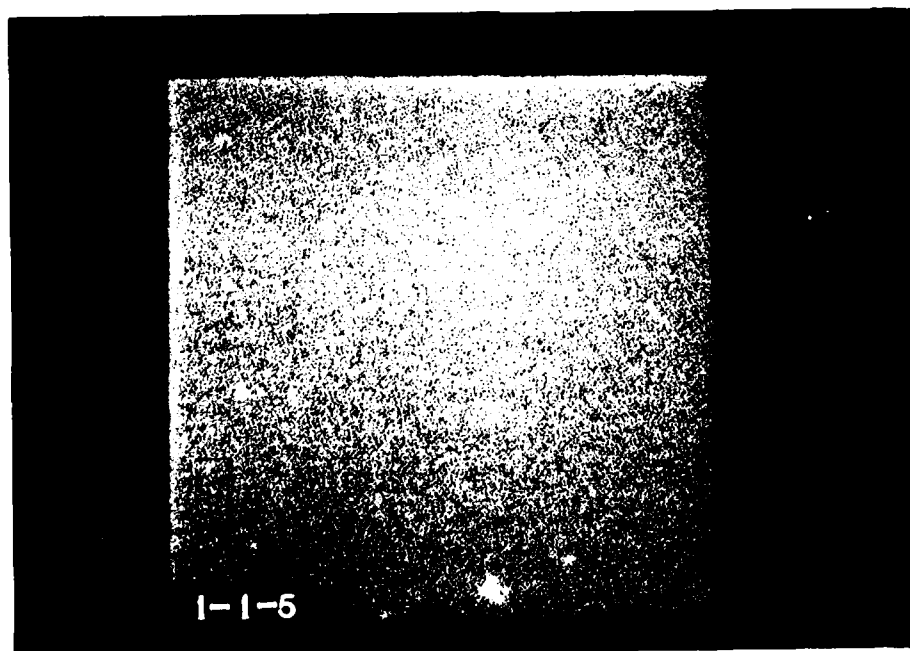


Figure A1-157. Sample 1-1-5, direct rear view.

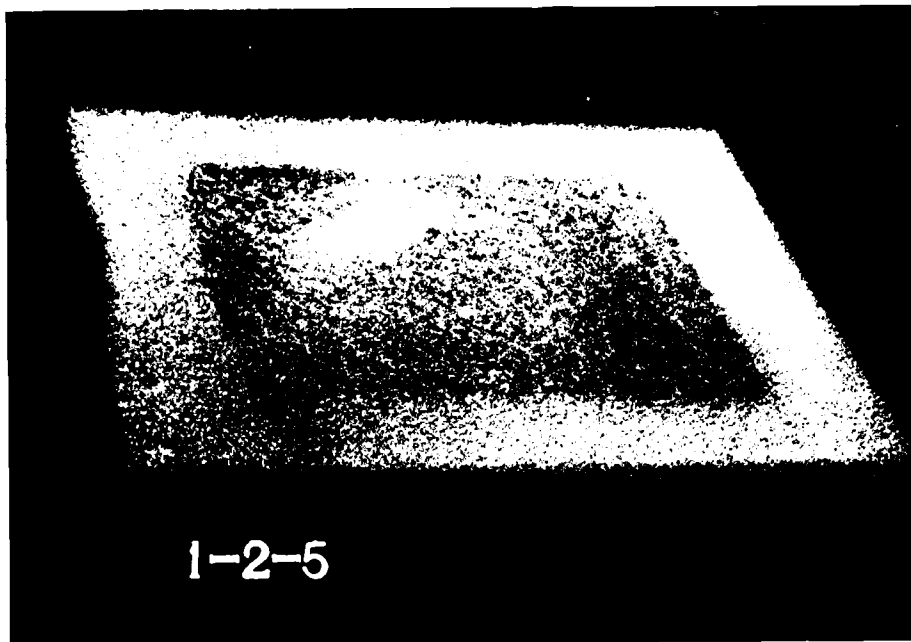


Figure A1-158. Sample 1-2-5, perspective front view.

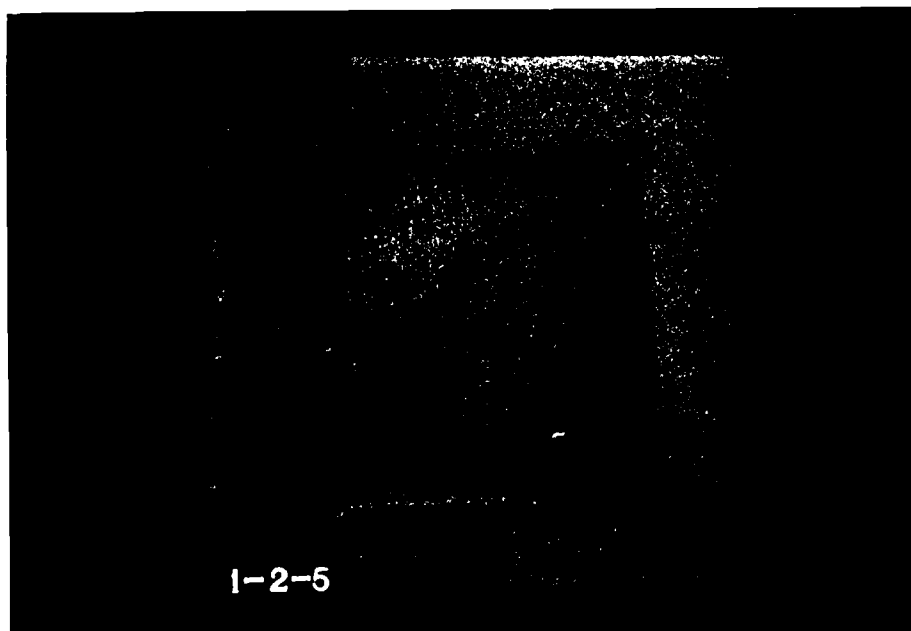


Figure A1-159. Sample 1-2-5, direct front view.

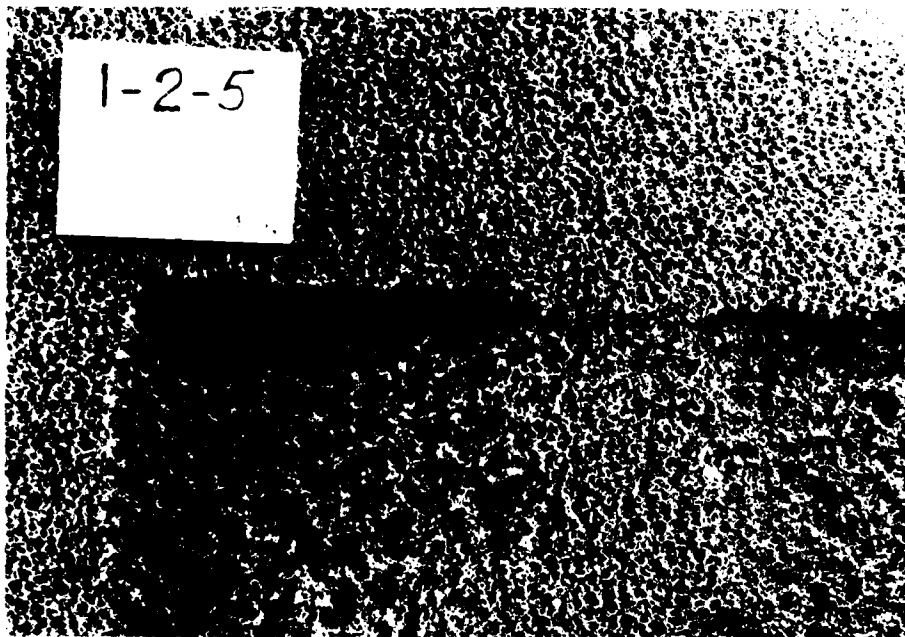


Figure A1-160. Sample 1-2-5, close-up view of front surface.

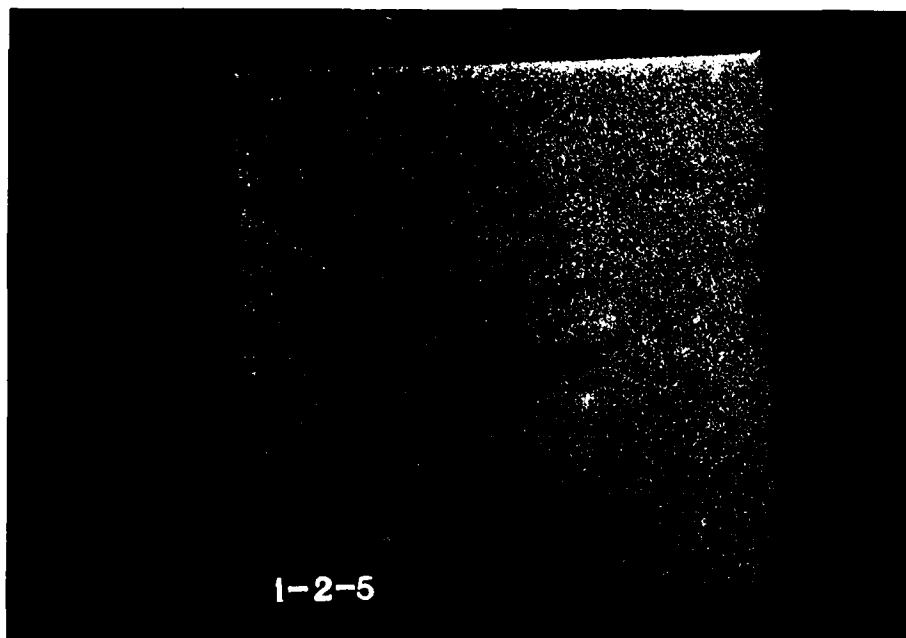


Figure A1-161. Sample 1-2-5, direct rear view.

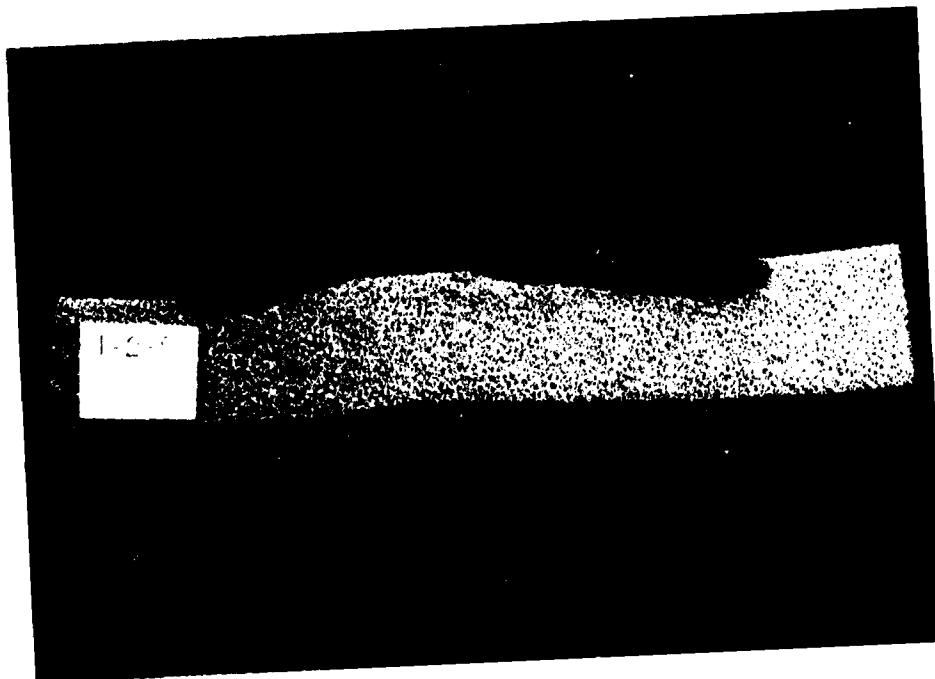


Figure A1-162. Sample 1-2-5, cross-sectional view.

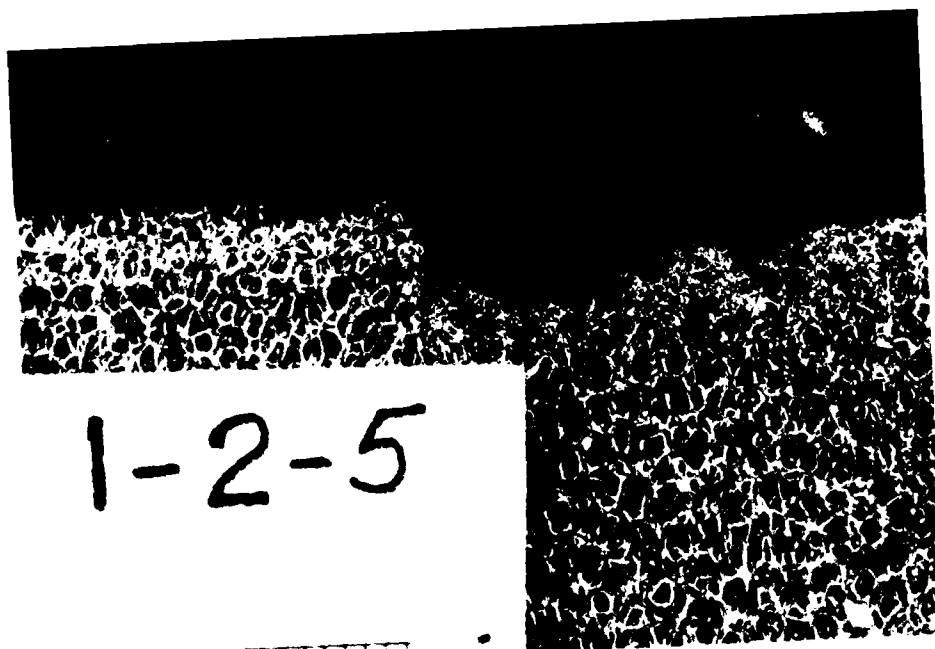


Figure A1-163. Sample 1-2-5, close-up cross-sectional view, upper left quadrant.

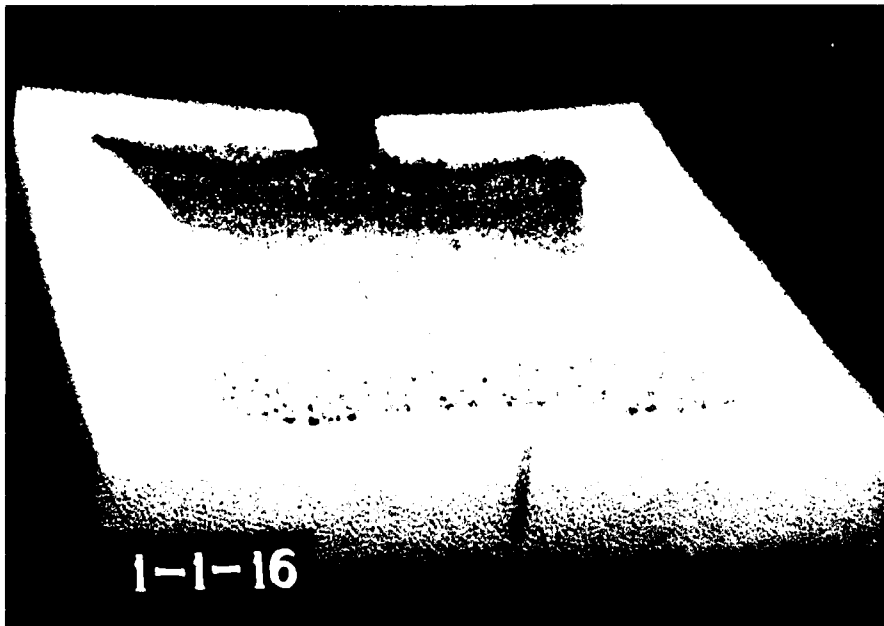


Figure A1-187. Sample 1-1-16, perspective front view.

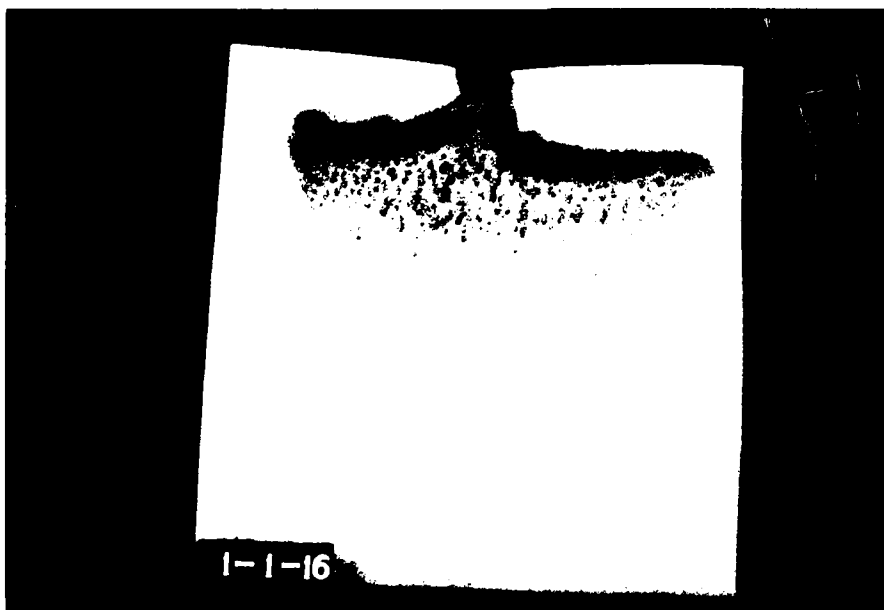


Figure A1-188. Sample 1-1-16, direct front view.

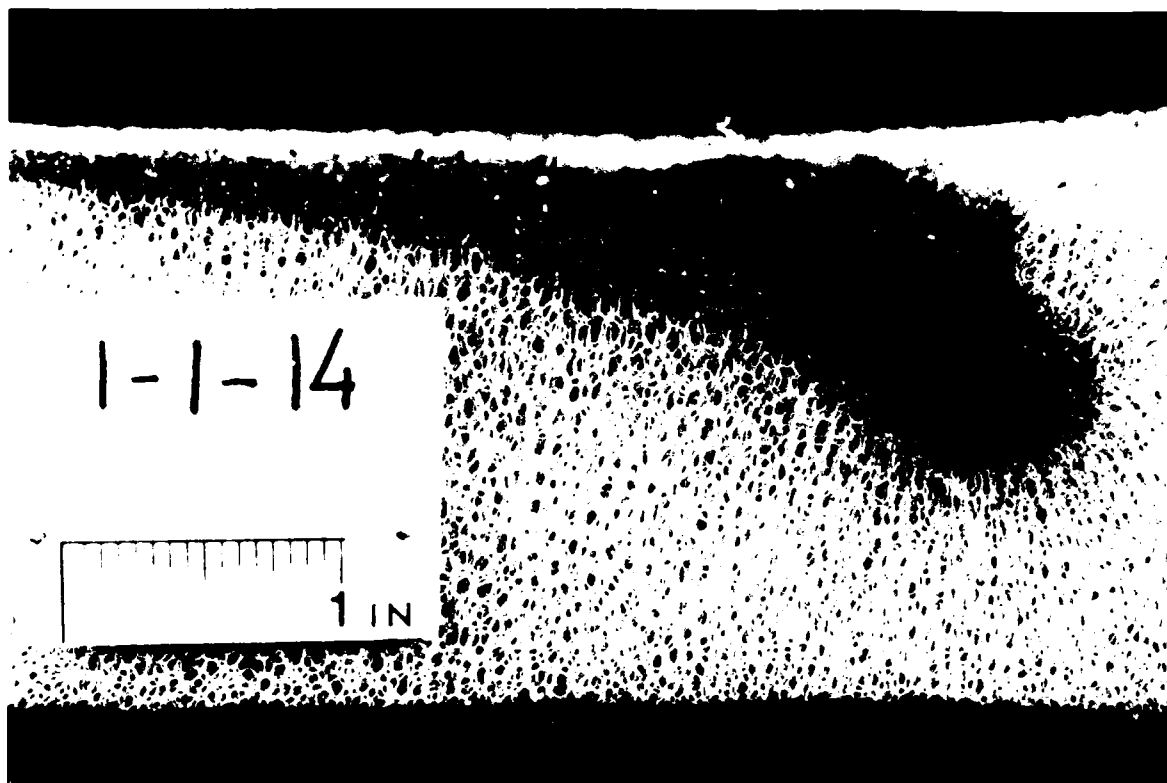


Figure A1-186. Sample 1-1-14, close-up cross-sectional view, upper left quadrant.

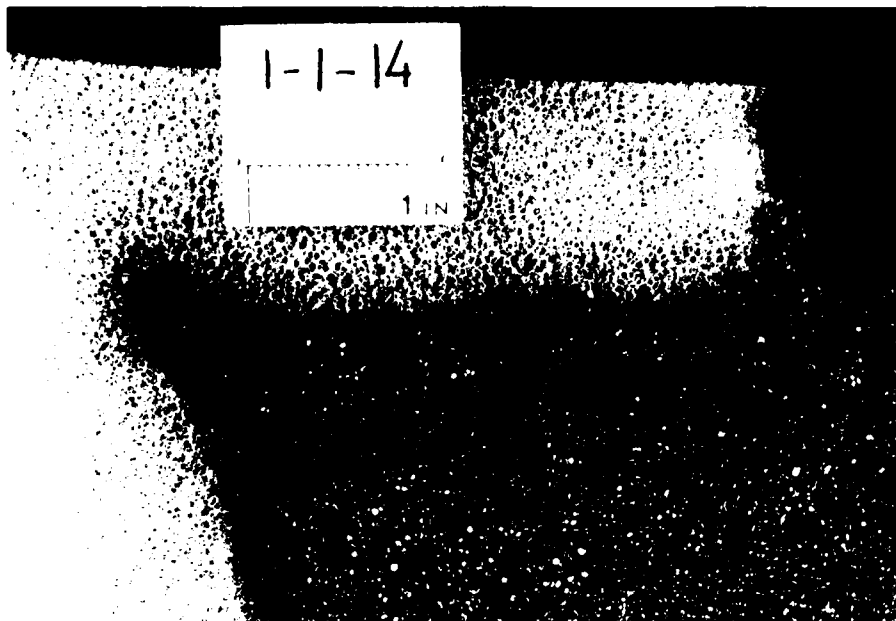


Figure A1-184. Sample 1-1-14, close-up front view, upper left quadrant.

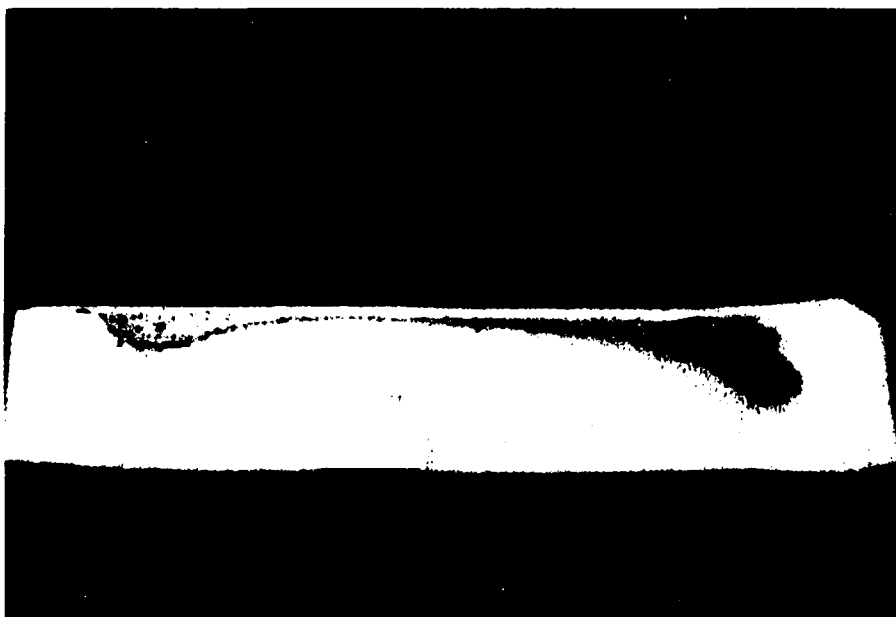


Figure A1-185. Sample 1-1-14, cross-sectional view.

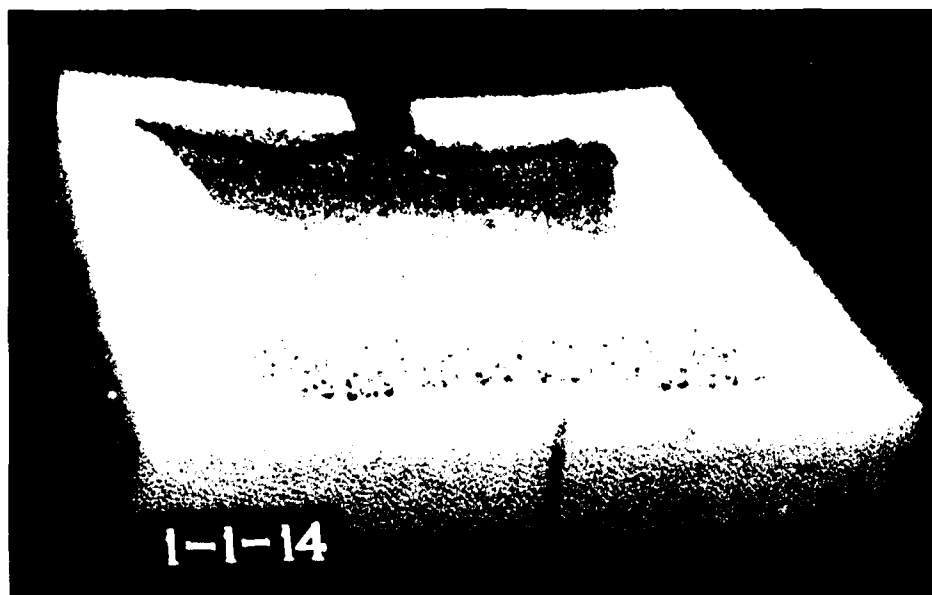


Figure A1-182. Sample 1-1-14, perspective front view.

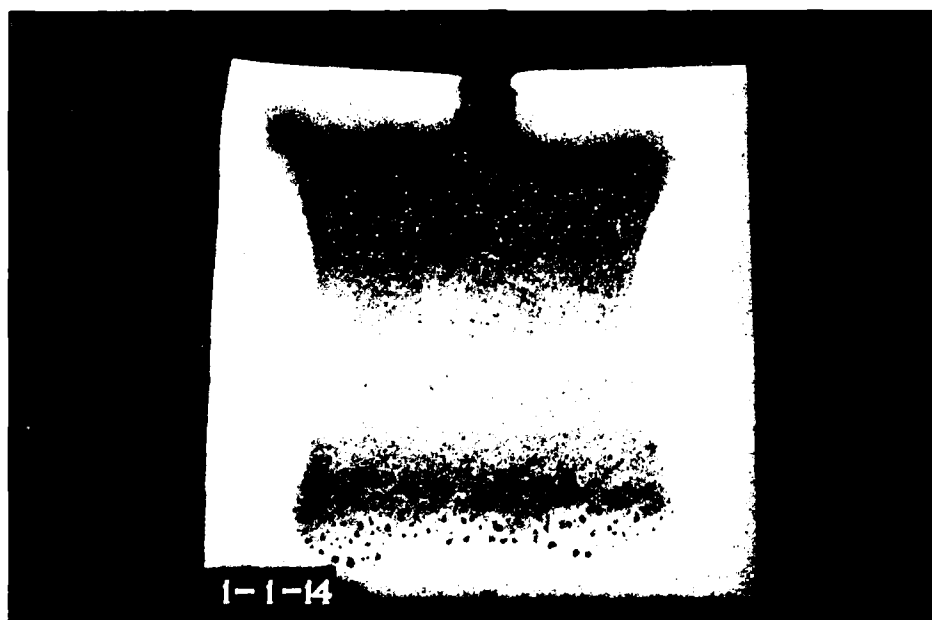


Figure A1-183. Sample 1-1-14, direct front view.

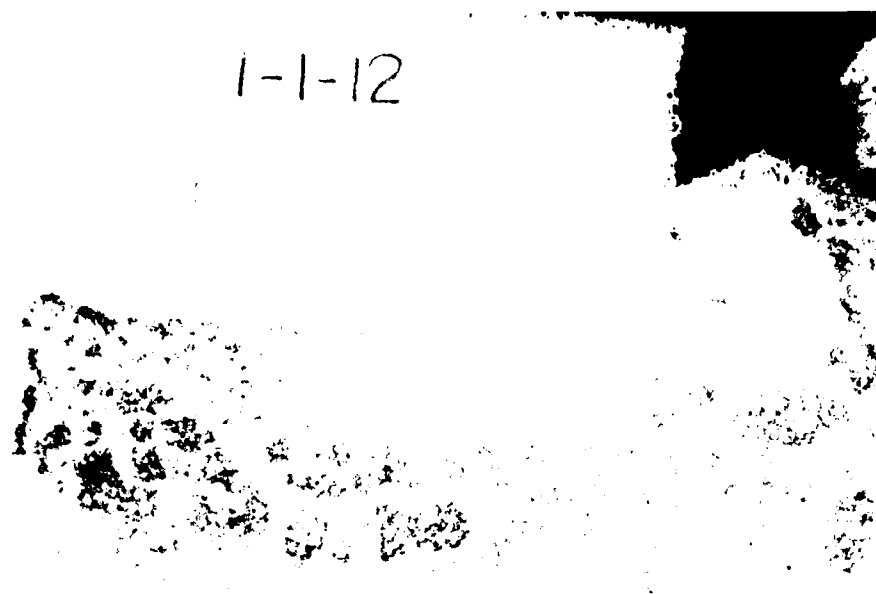


Figure A1-180. Sample 1-1-12, close-up view of front surface, upper left and central areas.

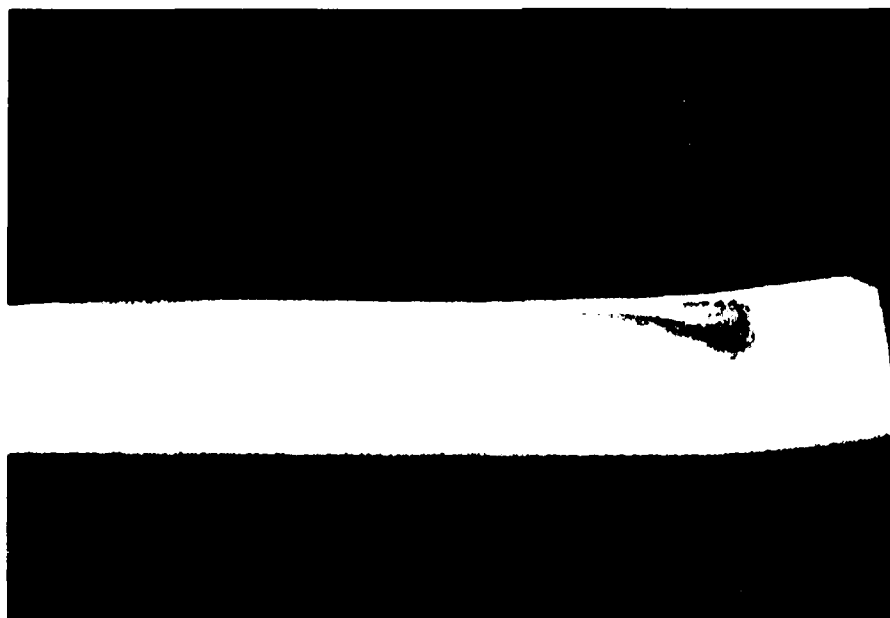


Figure A1-181. Sample 1-1-12, cross-sectional view.

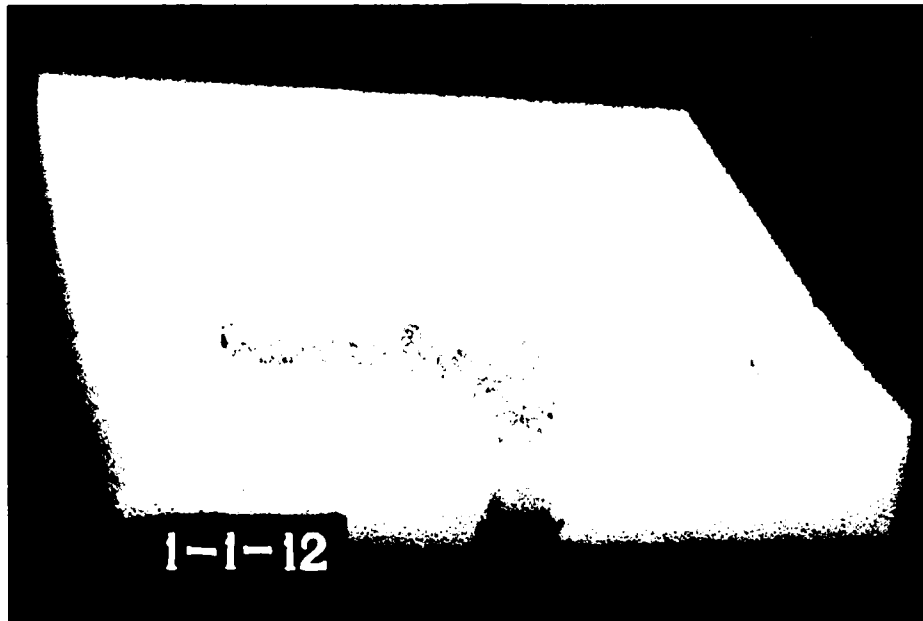


Figure A1-178. Sample 1-1-12, perspective front view.

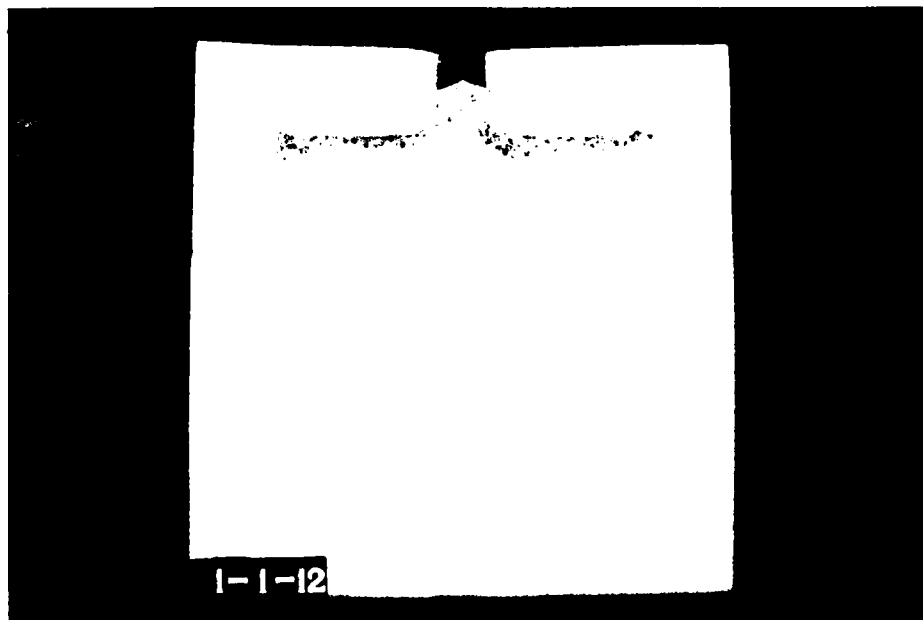


Figure A1-179. Sample 1-1-12, direct front view.

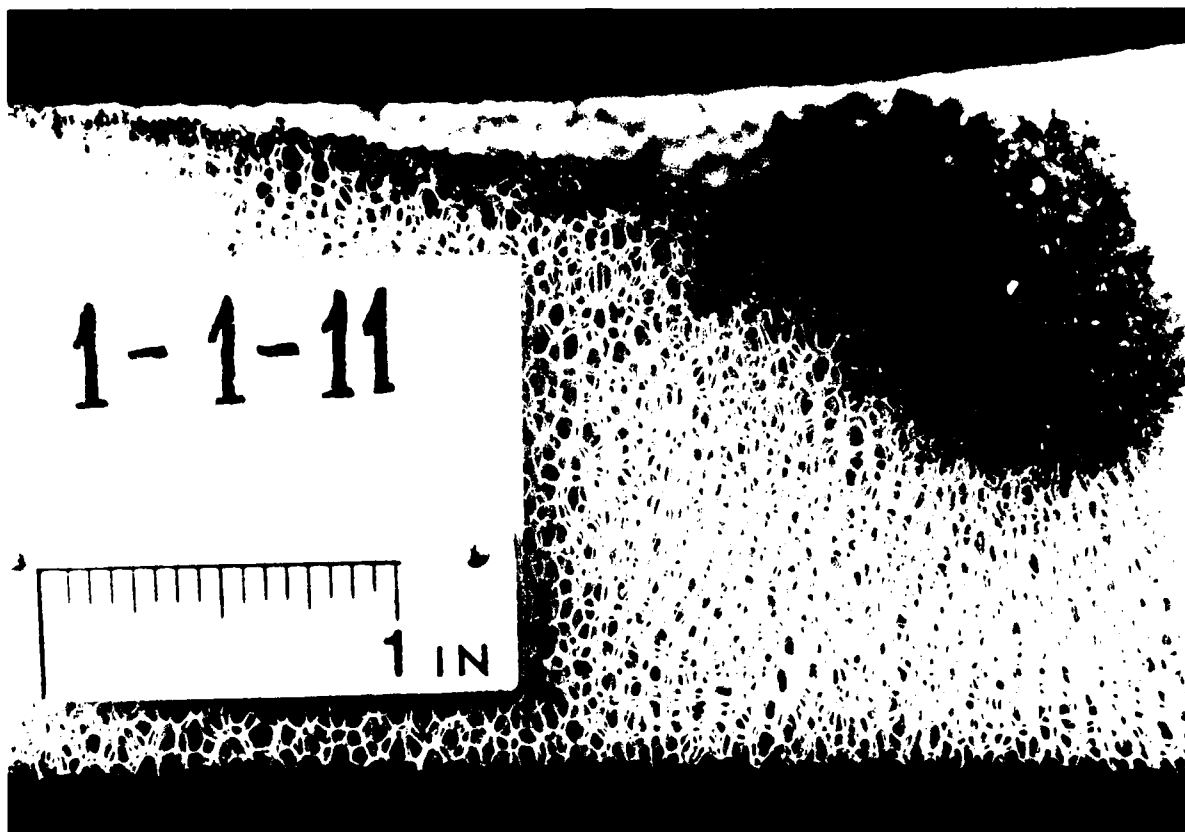


Figure A1-177. Close-up cross-sectional view,
upper right corner.



Figure A1-175. Sample 1-1-11, close-up view of front surface, upper left corner.

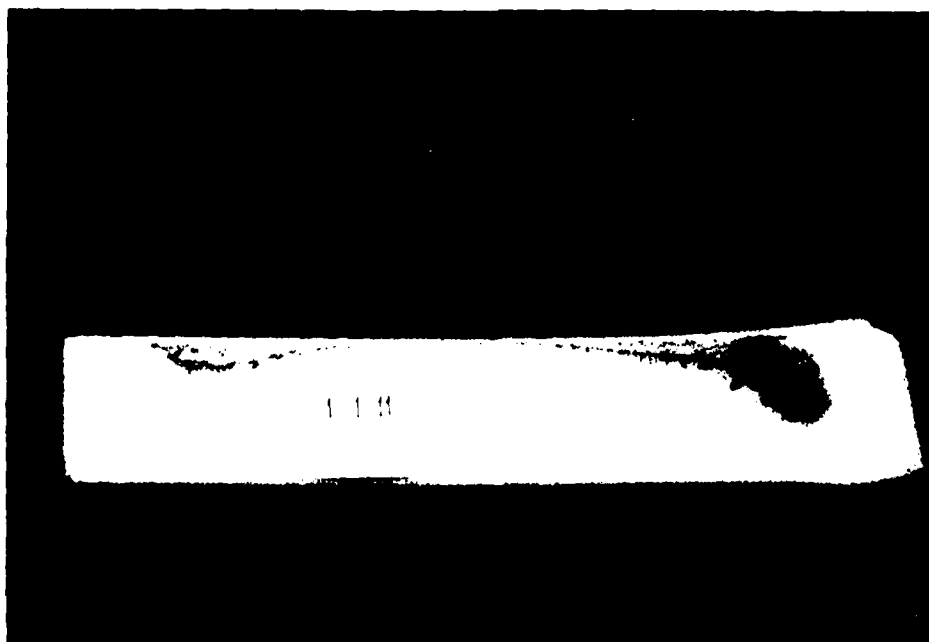


Figure A1-176. Sample 1-1-11, cross-sectional view.

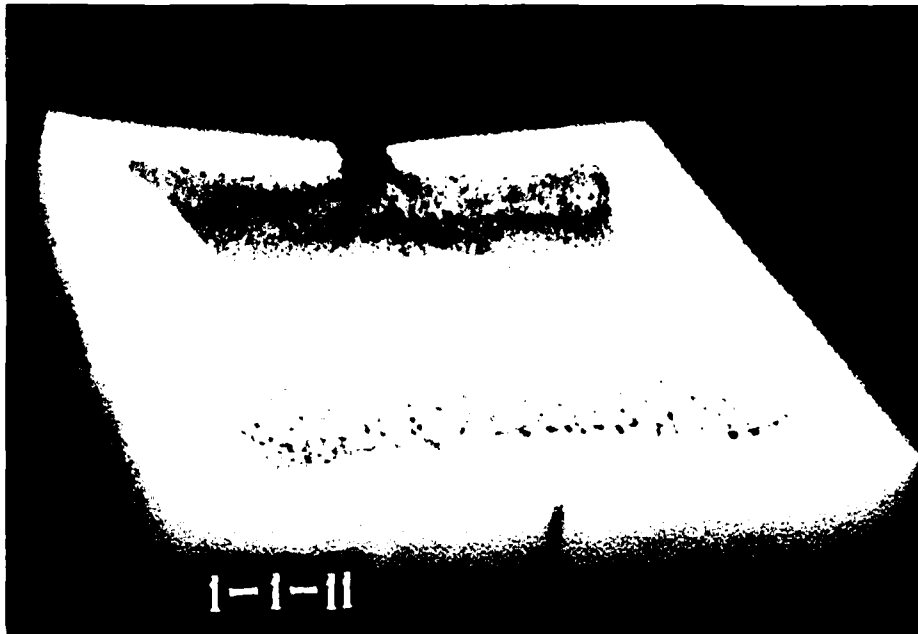


Figure A1-173. Sample 1-1-11, perspective front view.

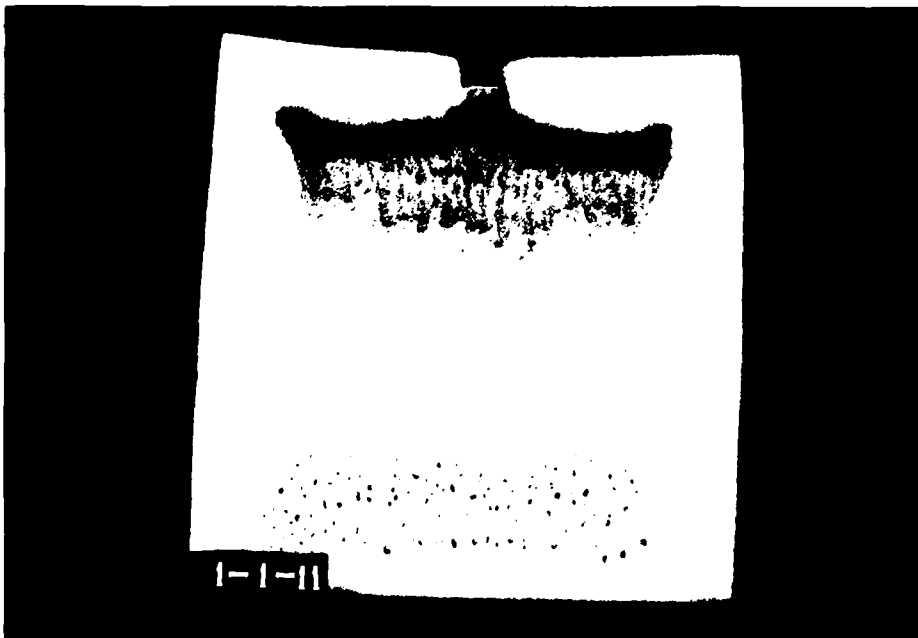


Figure A1-174. Sample 1-1-11, direct front view.

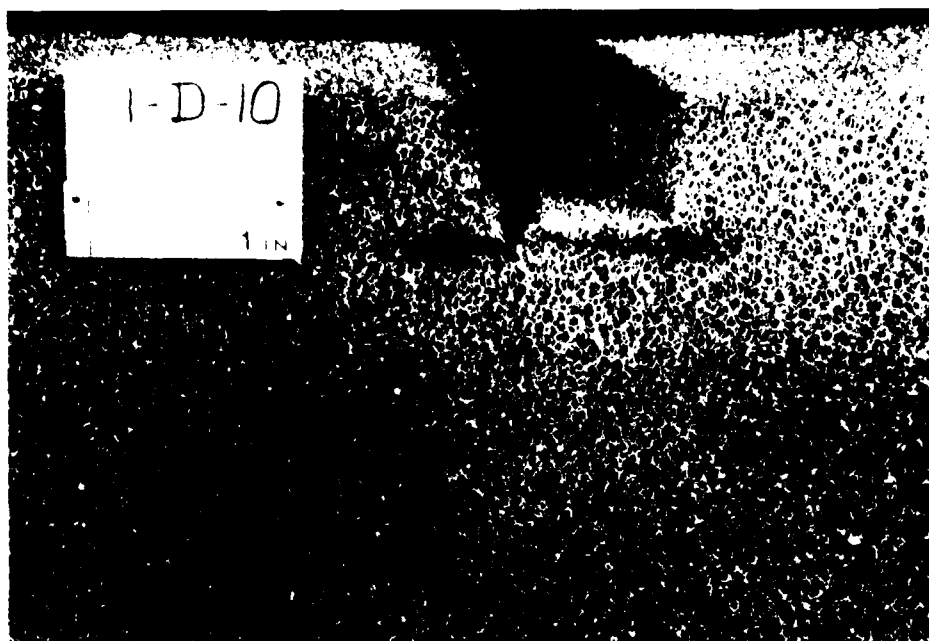


Figure A1-171. Sample 1-D-10, close-up view of front surface, upper left and central areas.

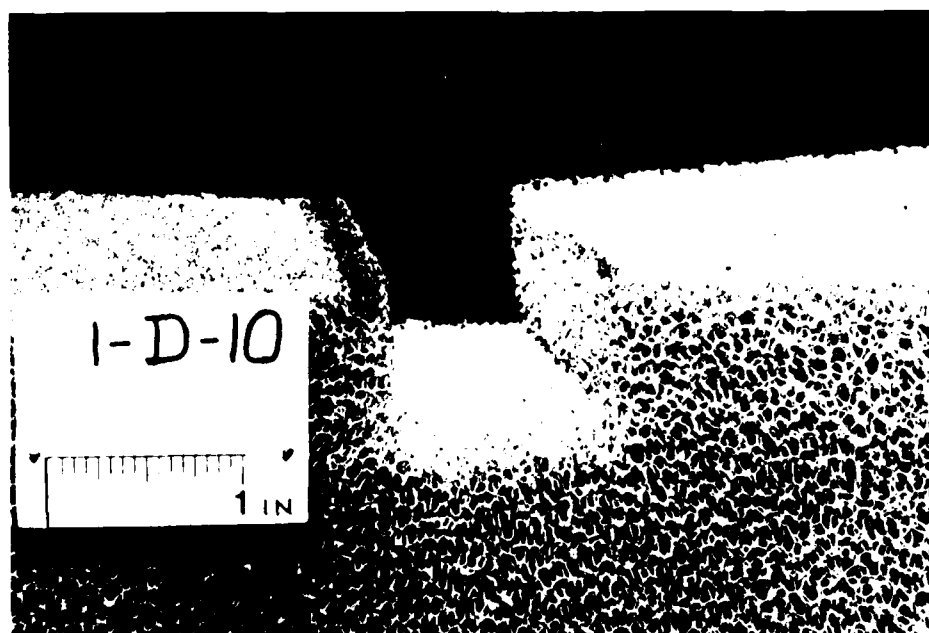


Figure A1-172. Sample 1-D-10, close-up view of the vent area.

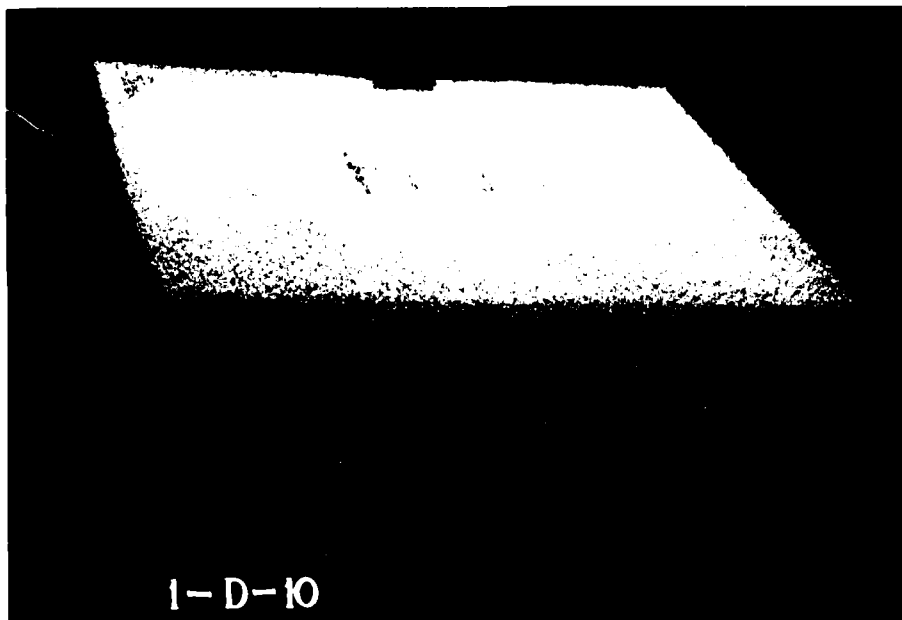


Figure A1-169. Sample 1-D-10, perspective front view.

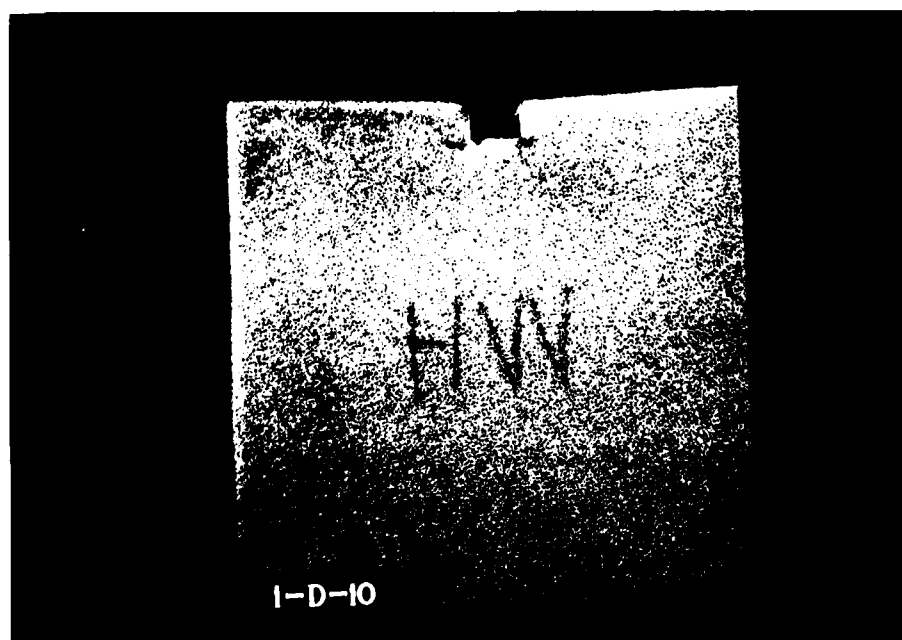


Figure A1-170. Sample 1-D-10, direct front view.

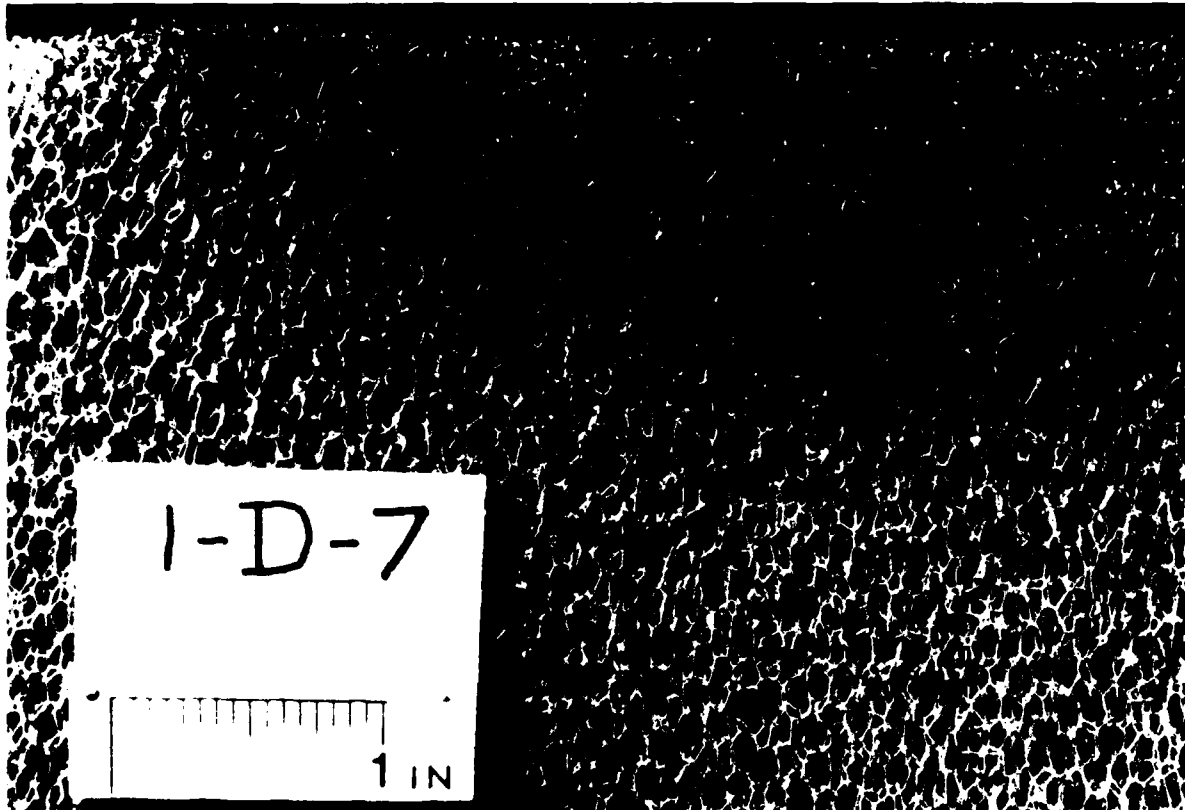


Figure A1-168. Sample 1-D-7, close-up cross-sectional view.

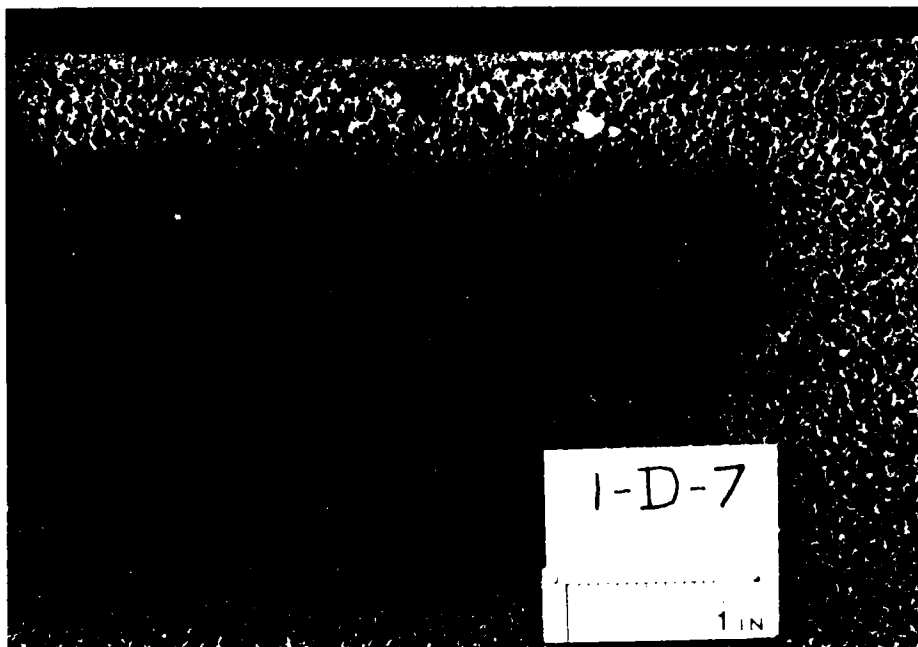


Figure A1-166. Sample 1-D-7, close-up view of front surface, upper right corner.

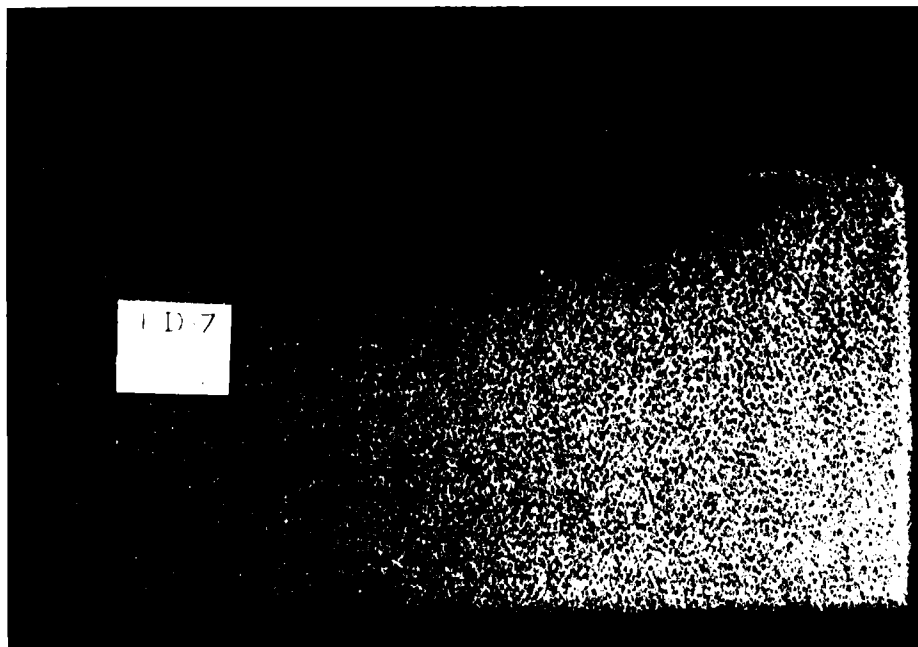


Figure A1-167. Sample 1-D-7, cross-sectional view.

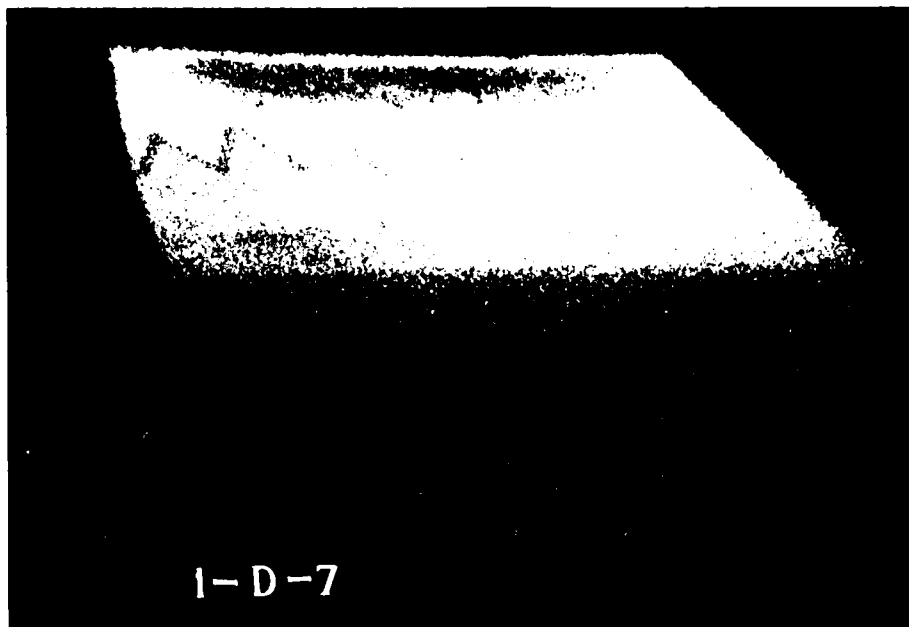


Figure A1-164. Sample 1-D-7, perspective front view.

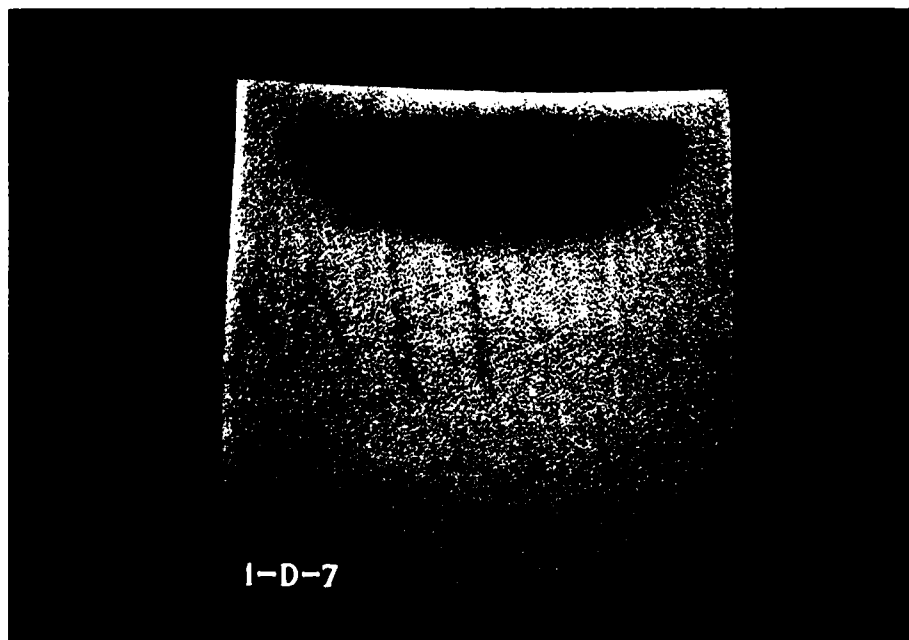


Figure A1-165. Sample 1-D-7, direct front view.

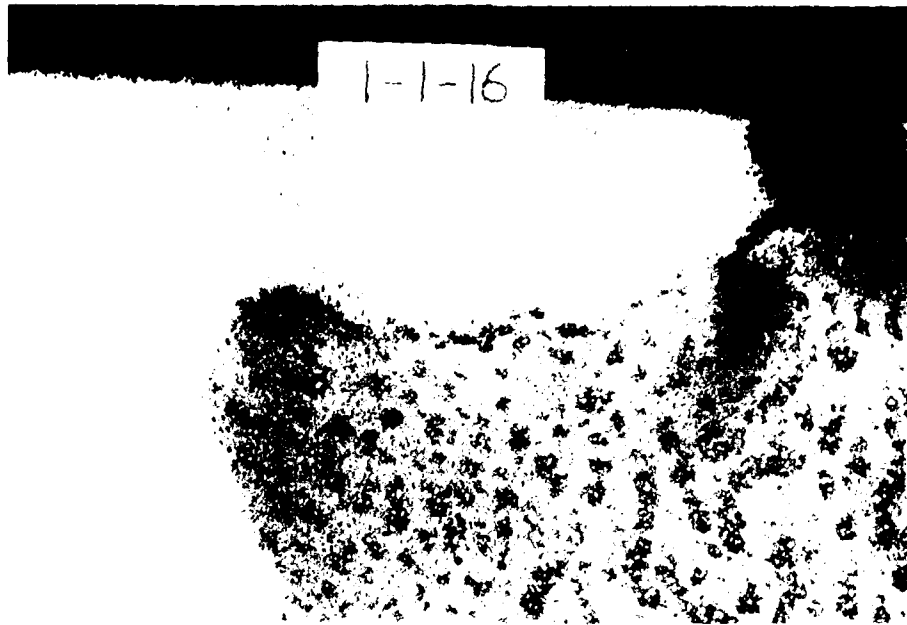


Figure A1-189. Sample 1-1-16, close-up front view, upper left quadrant.

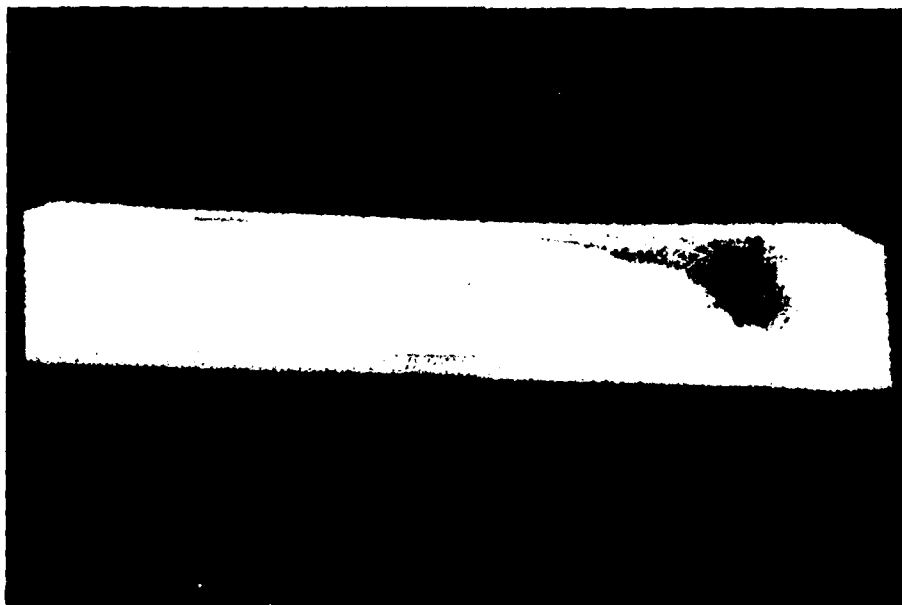


Figure A1-190. Sample 1-1-16, cross-sectional view.

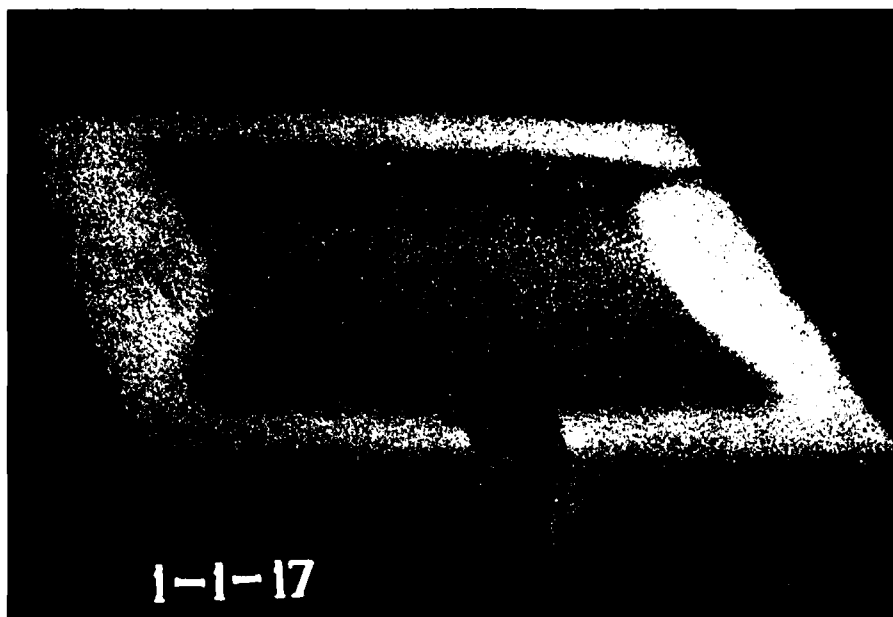


Figure A1-191. Sample 1-1-17, perspective front view.



Figure A1-192. Sample 1-1-17, direct front view.

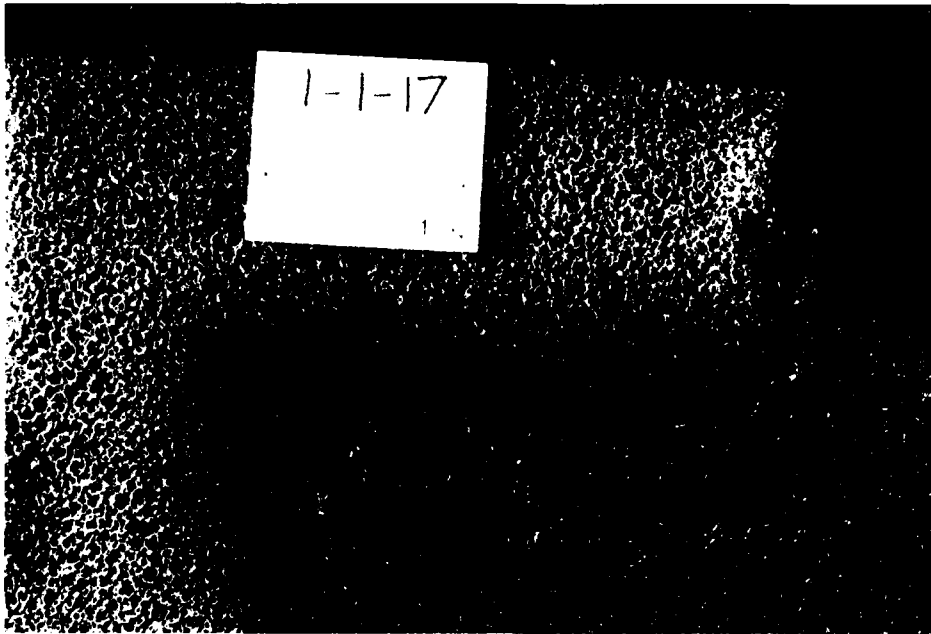


Figure A1-193. Sample 1-1-17, close-up front view, upper left quadrant.



Figure A1-194. Sample 1-1-17, cross-sectional view.

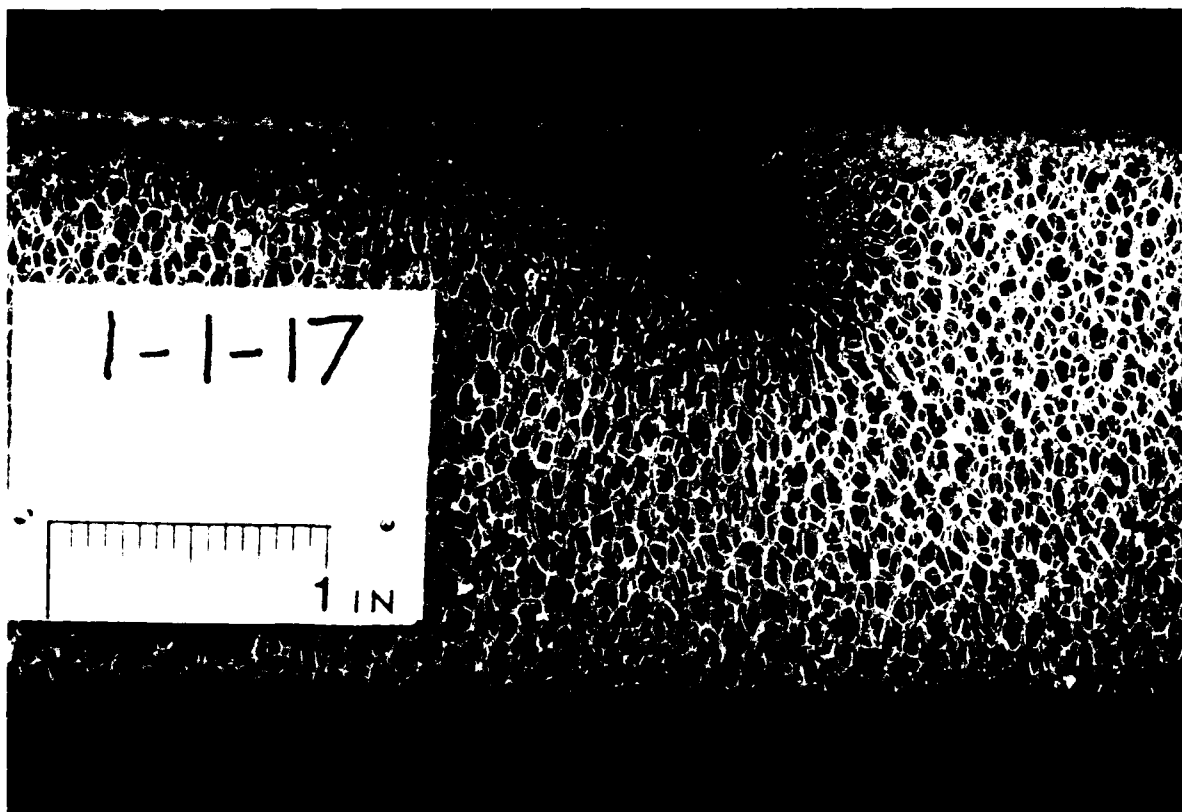


Figure A1-195. Sample 1-1-17, close-up cross-sectional view, upper left quadrant.

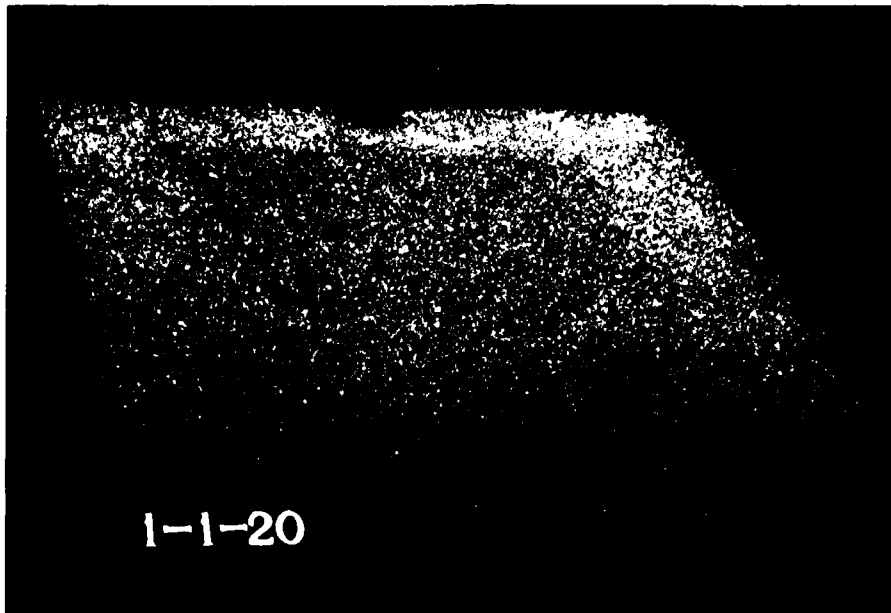


Figure A1-196. Sample 1-1-20, perspective front view.



Figure A1-197. Sample 1-1-20, direct front view.

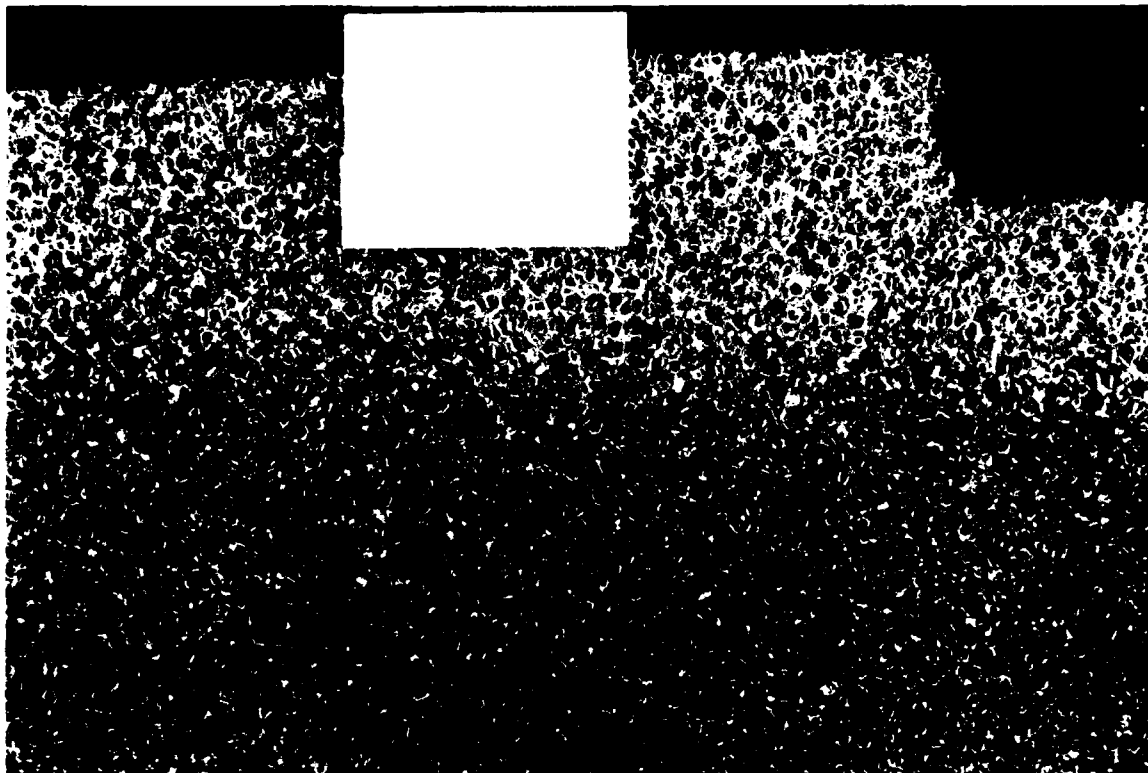


Figure A1-198. Sample 1-1-20, close-up front view,
upper left quadrant.

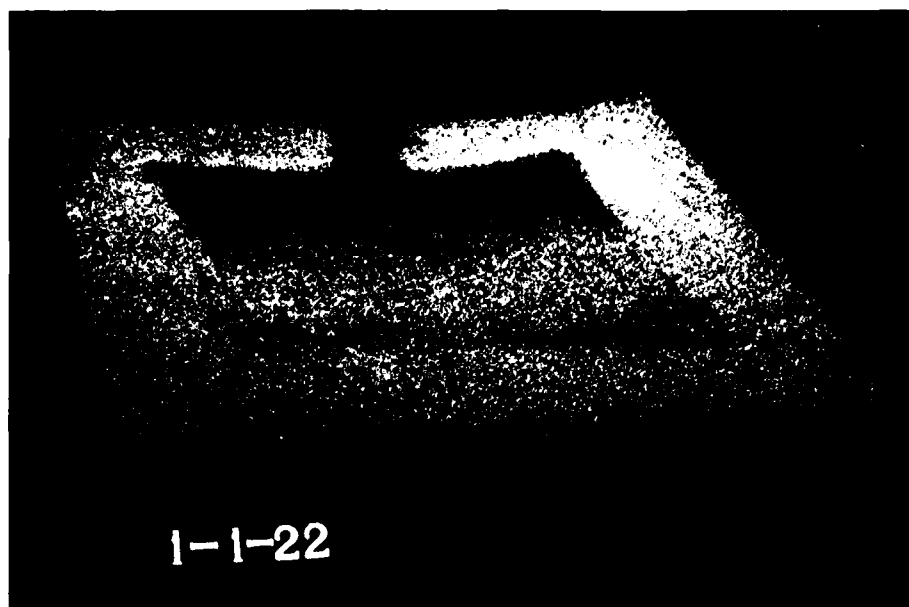


Figure A1-199. Sample 1-1-22, perspective front view.

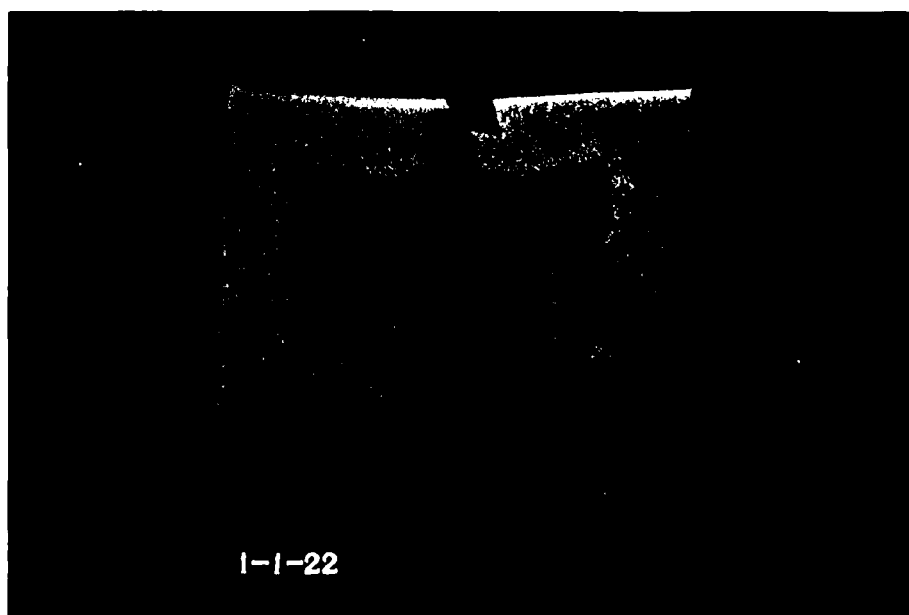


Figure A1-200. Sample 1-1-22, direct front view.

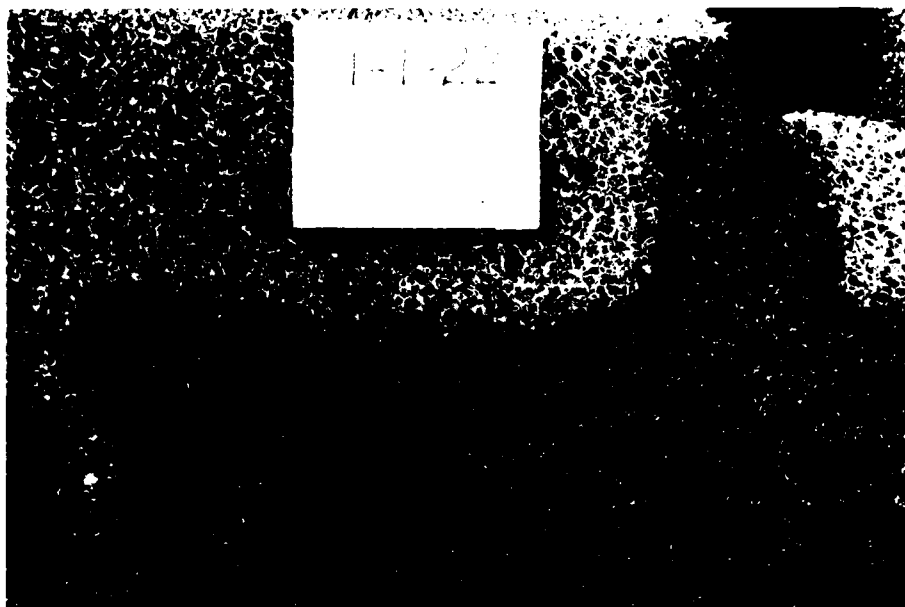


Figure A1-201. Sample 1-1-22, close-up front view, upper left quadrant.

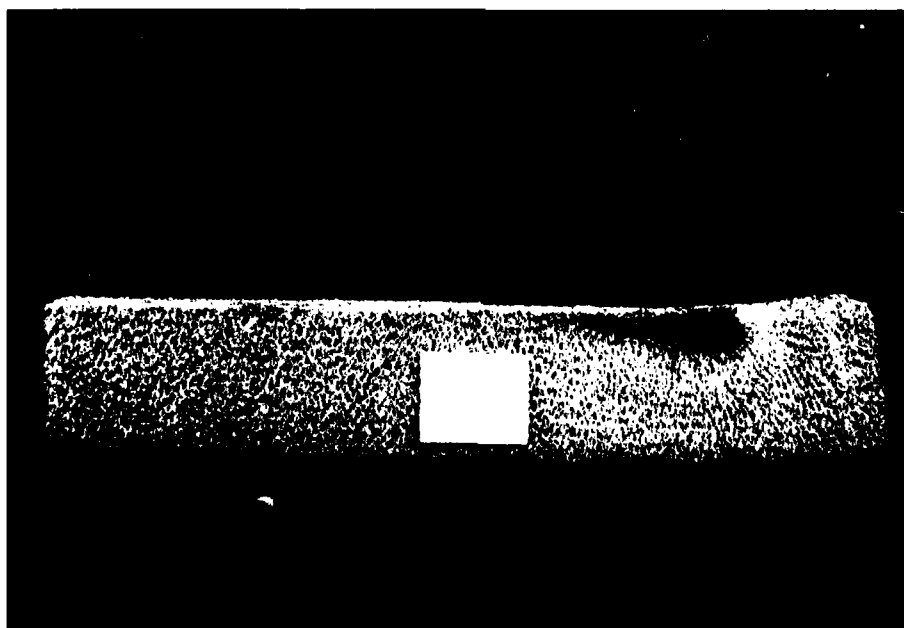


Figure A1-202. Sample 1-1-22, cross-sectional view.

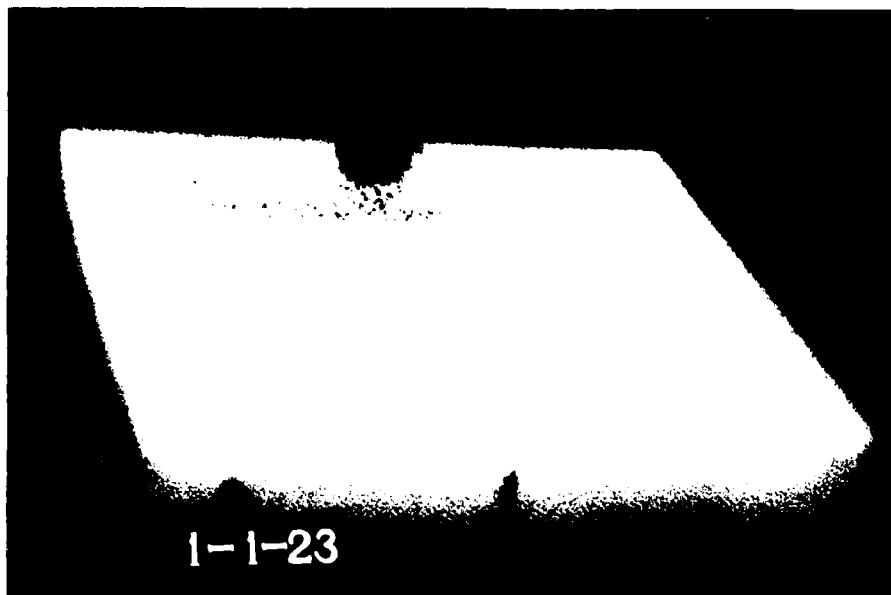


Figure A1-203. Sample 1-1-23, perspective front view.

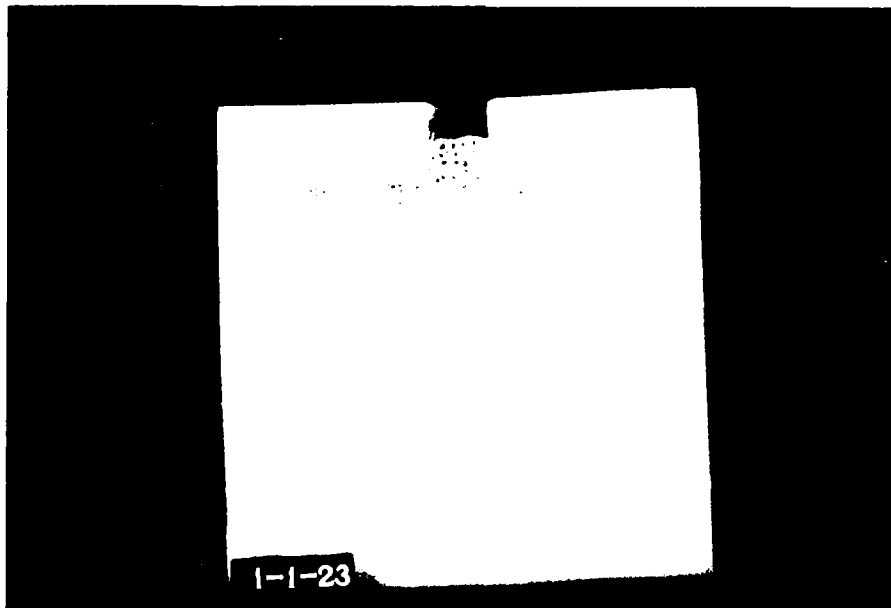


Figure A1-204. Sample 1-1-23, direct front view.

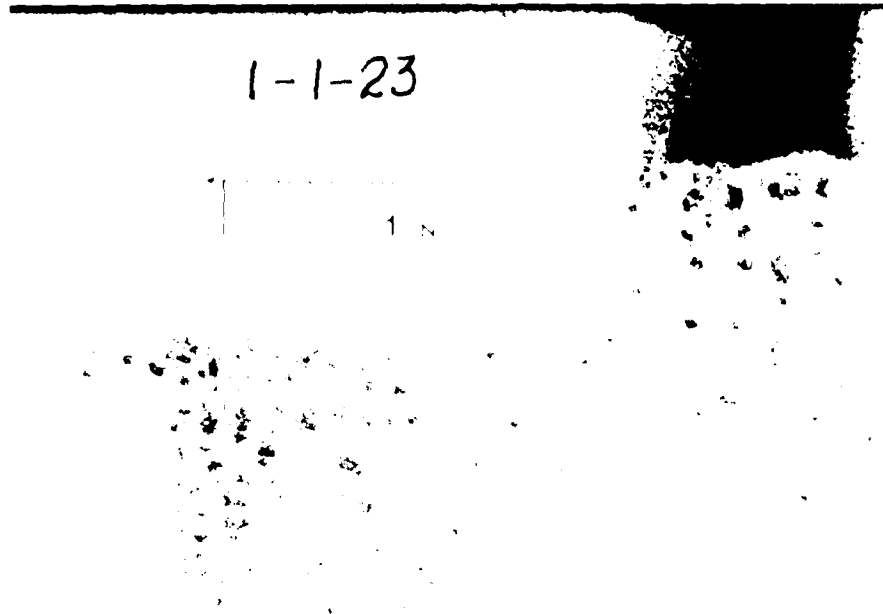


Figure A1-205. Sample 1-1-23, close-up front view, upper left quadrant.

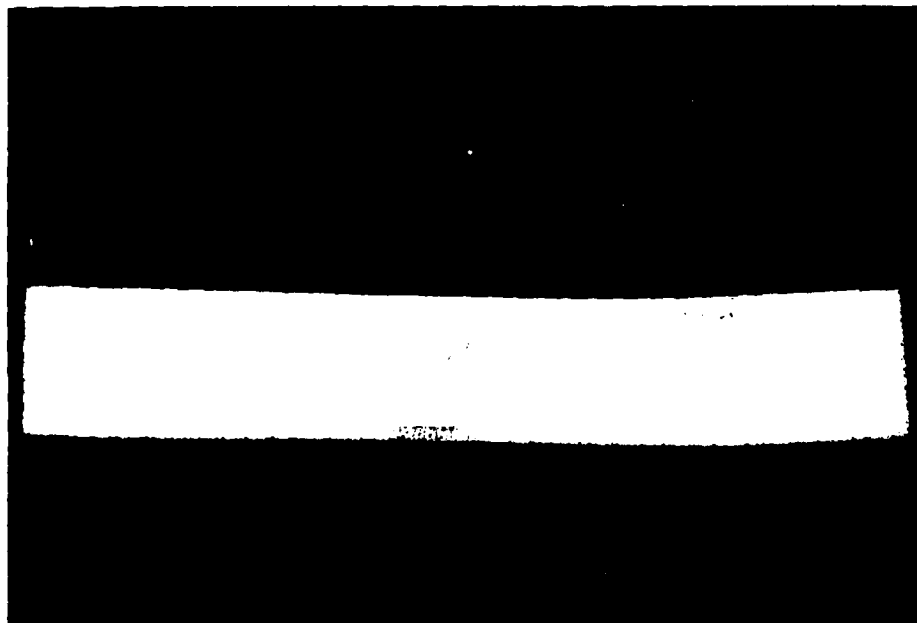


Figure A1-206. Sample 1-1-23, cross-sectional view.

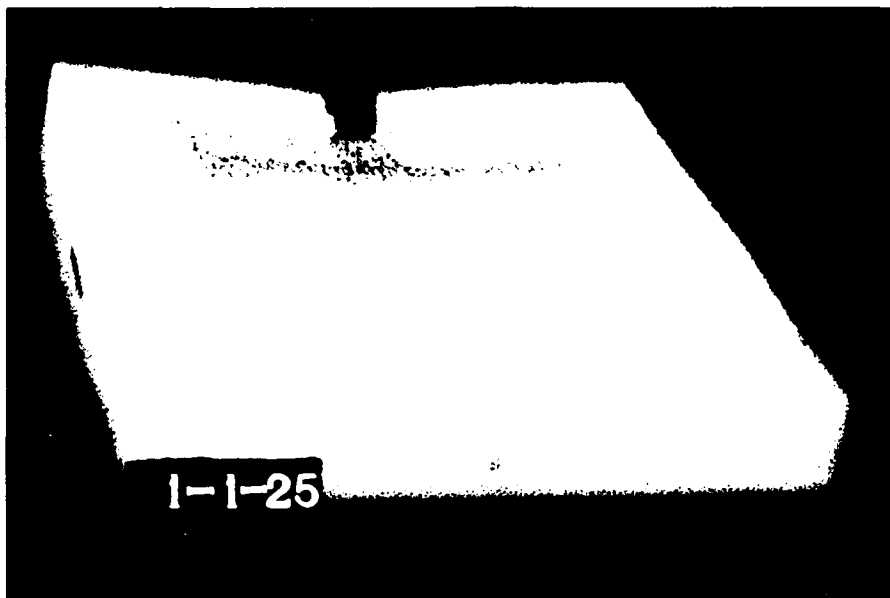


Figure A1-207. Sample 1-1-25, perspective front view.

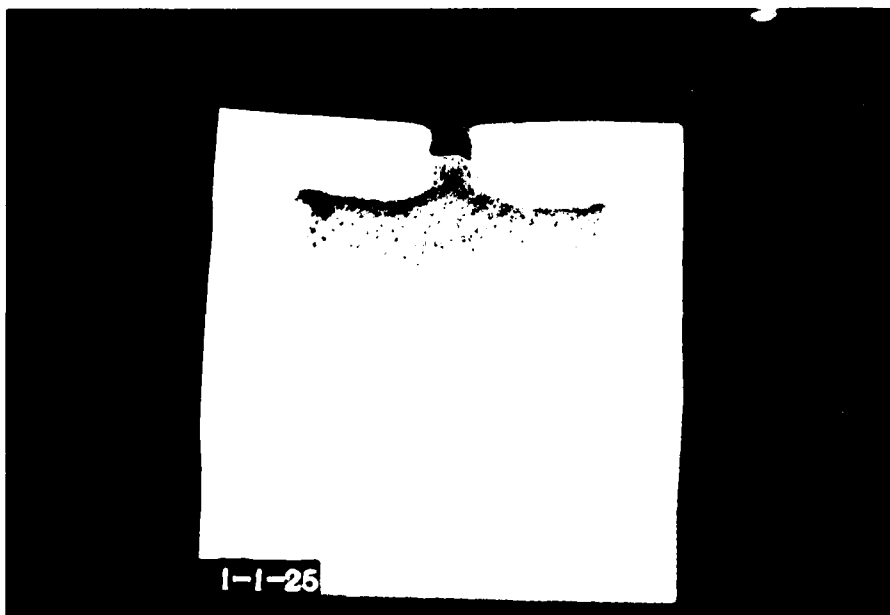


Figure A1-208. Sample 1-1-25, direct front view.

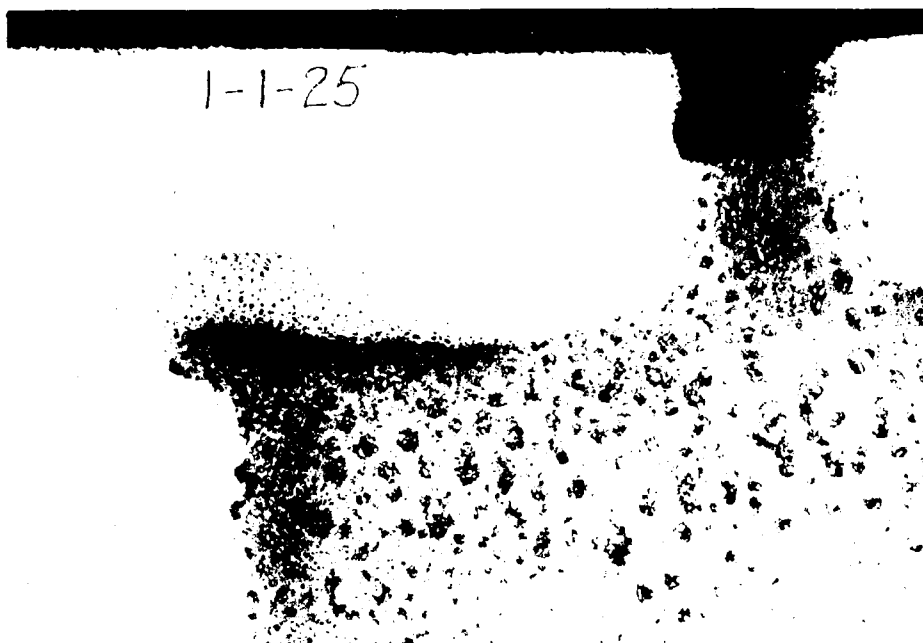


Figure A1-209. Sample 1-1-25, close-up front view, upper left quadrant.



Figure A1-210. Sample 1-1-25, cross-sectional view.

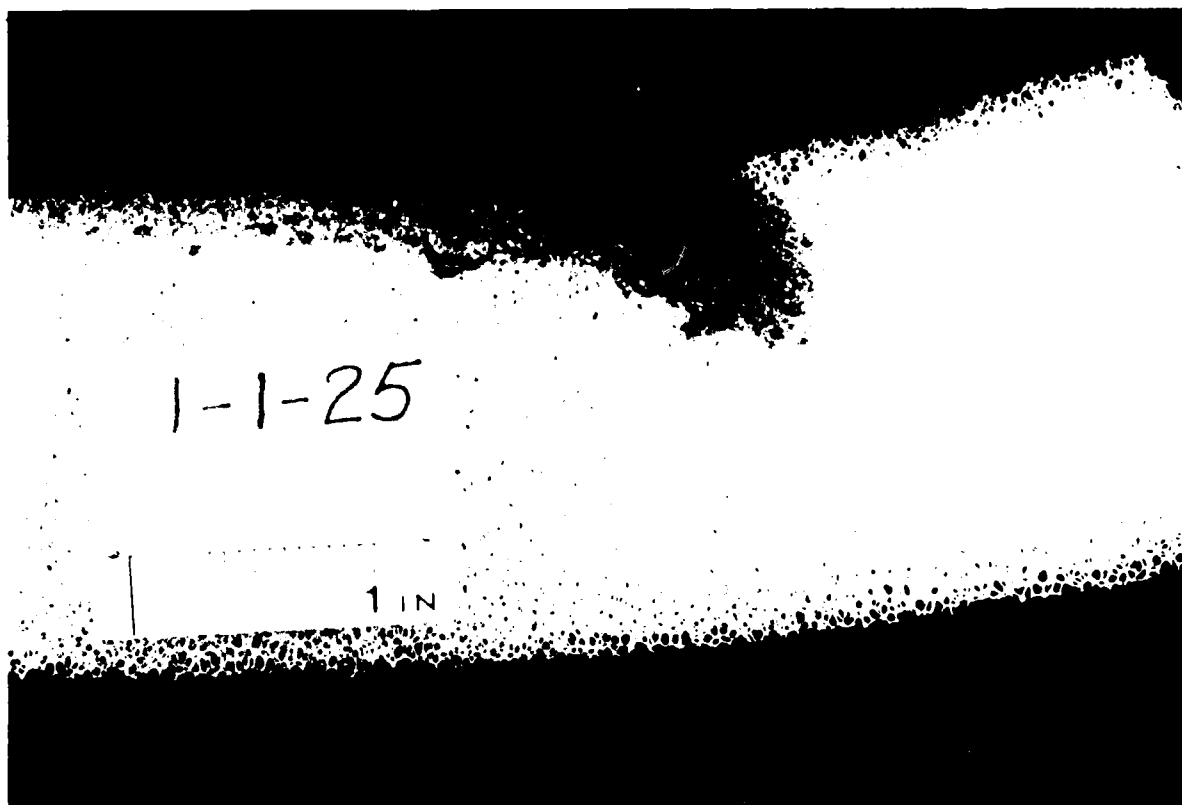


Figure A1-211. Sample 1-1-25, close-up cross-sectional view, upper left quadrant.

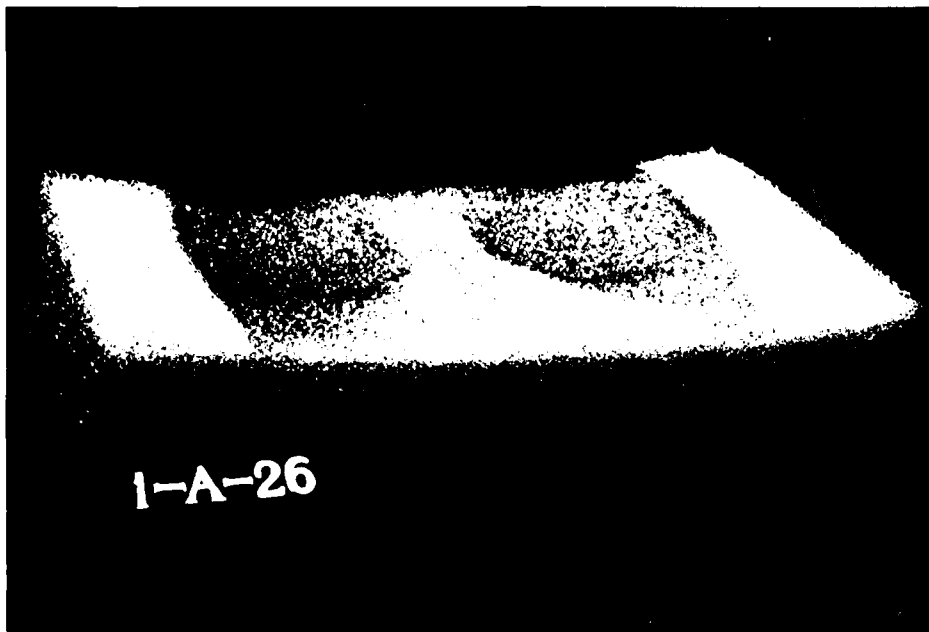


Figure A1-212. Sample 1-A-26, perspective front view.

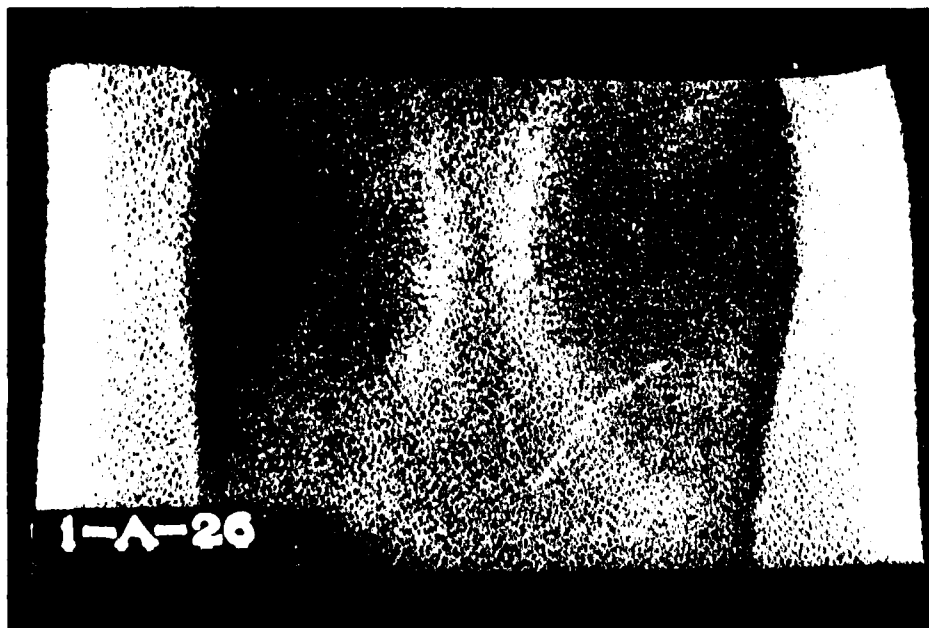


Figure A1-213. Sample 1-A-26, direct front view.

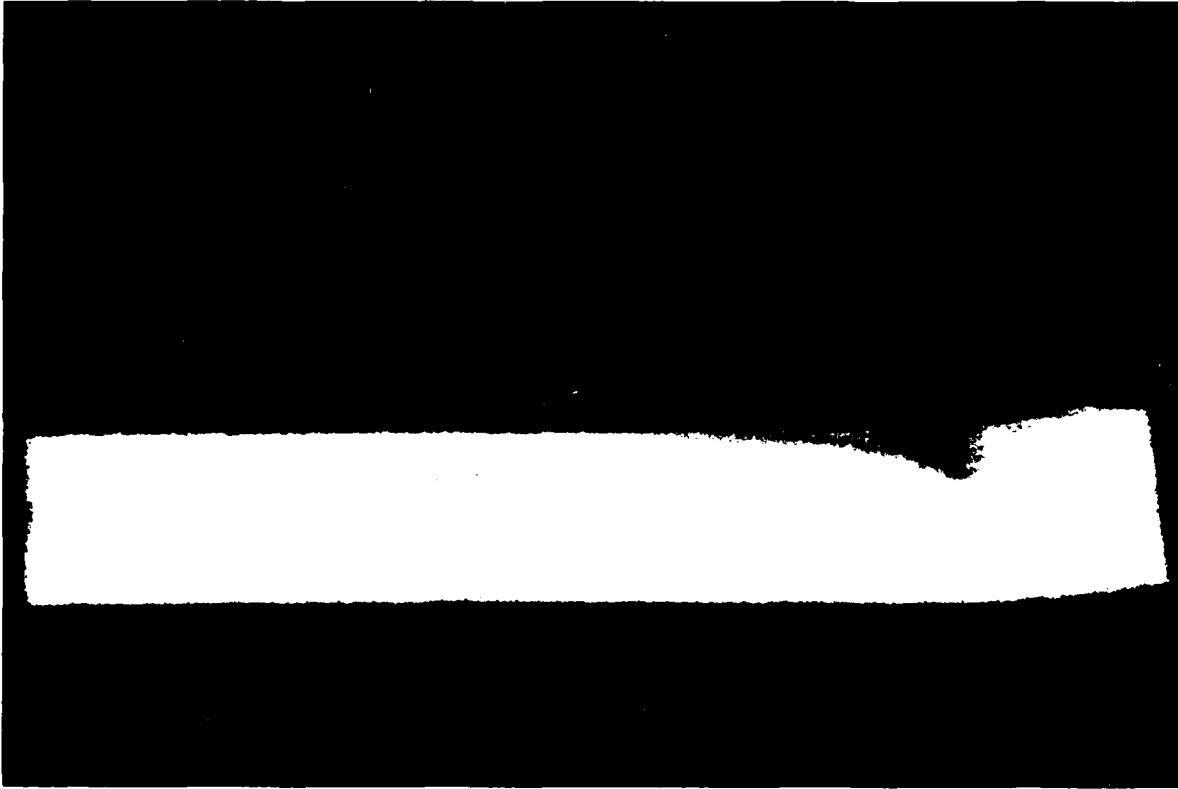


Figure A1-234. Sample 1-3-40, cross-sectional view.

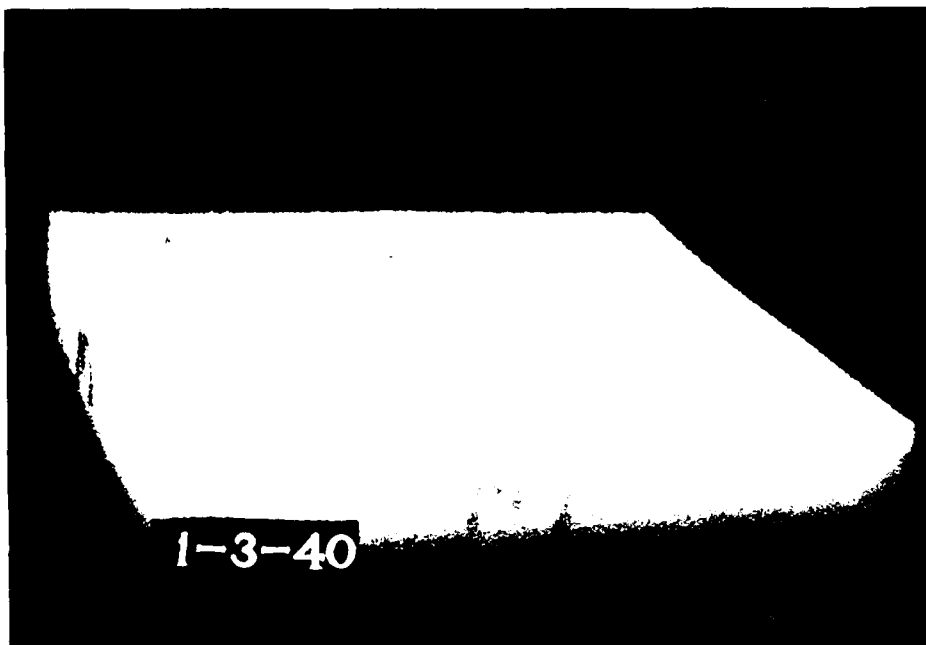


Figure A1-232. Sample 1-3-40, perspective front view.

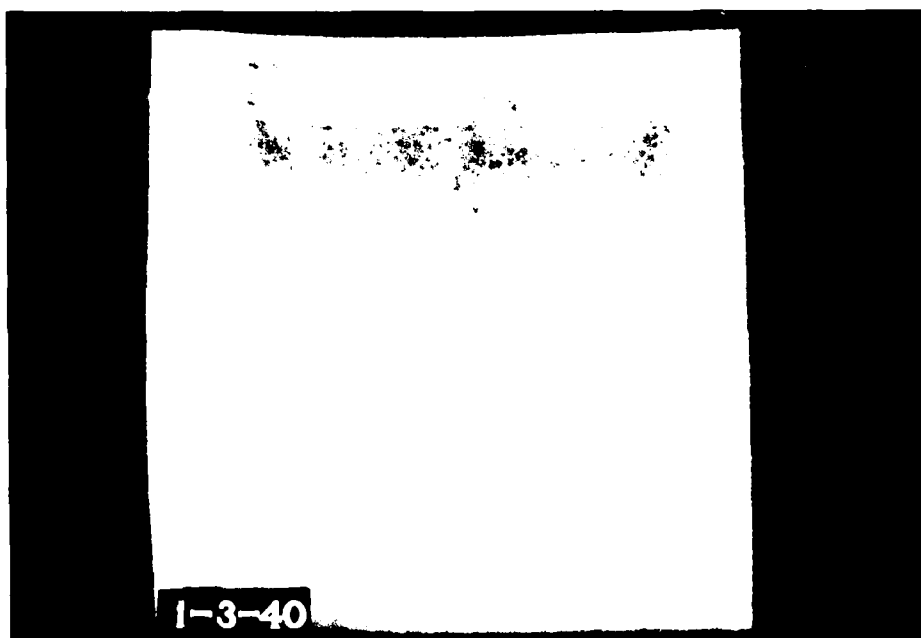


Figure A1-233. Sample 1-3-40, direct front view.

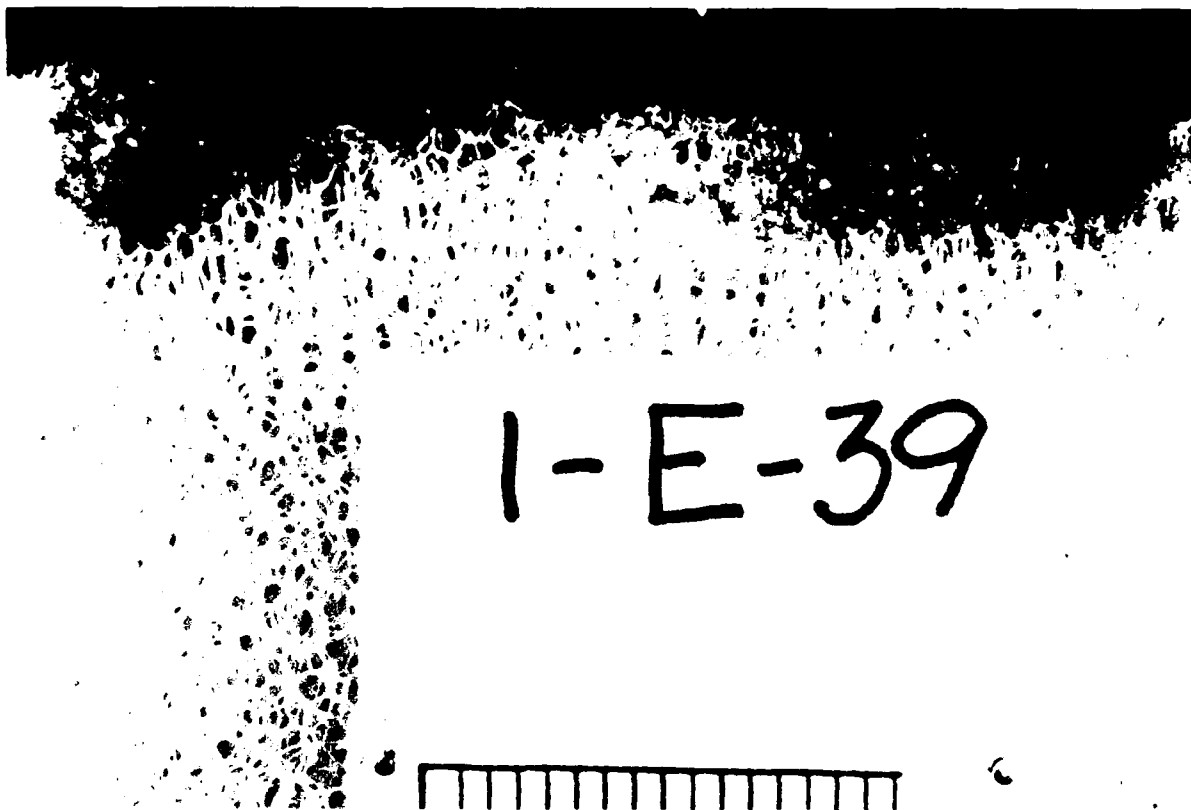


Figure A1-231. Sample 1-E-39, close-up cross-sectional view.

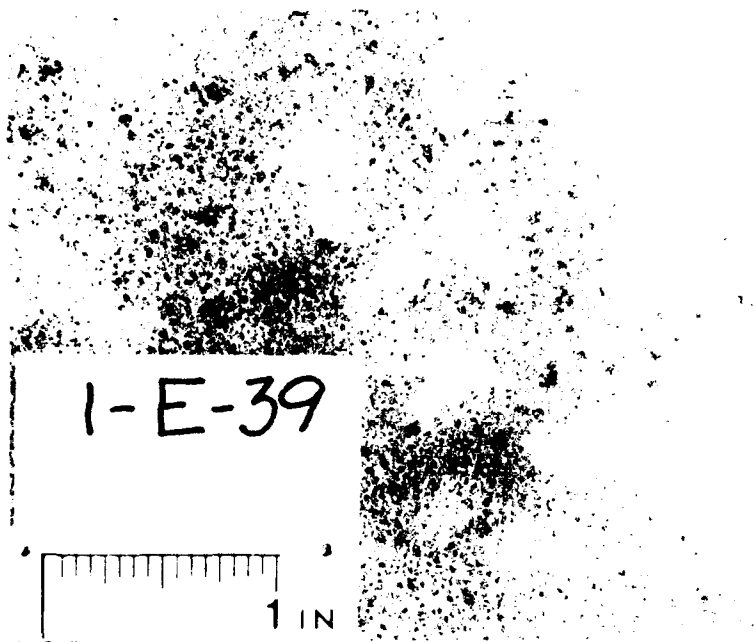


Figure A1-229. Sample 1-E-39, close-up view of front surface.

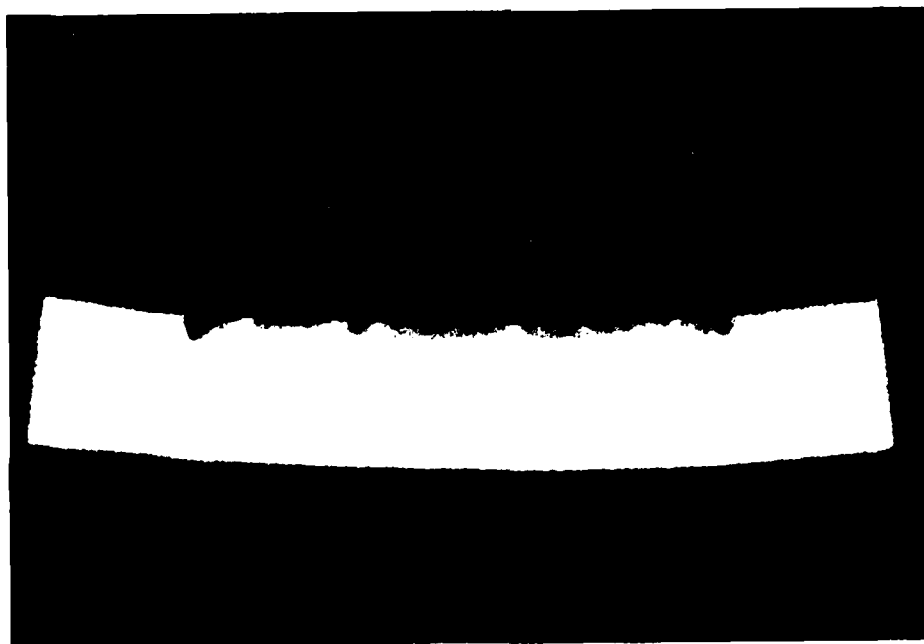


Figure A1-230. Sample 1-E-39, cross-sectional view.

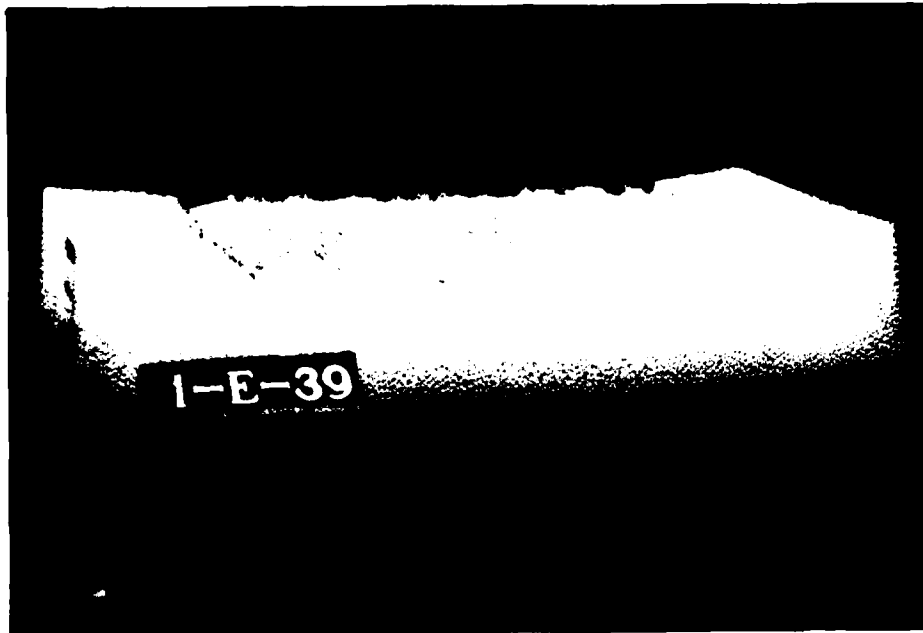


Figure A1-227. Sample 1-E-39, perspective front view.

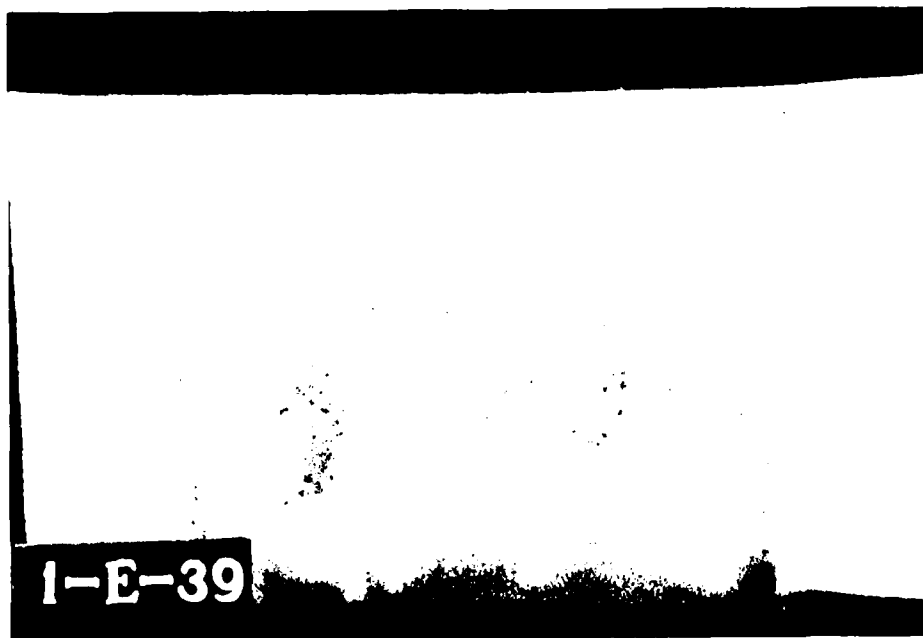


Figure A1-228. Sample 1-E-39, direct front view.

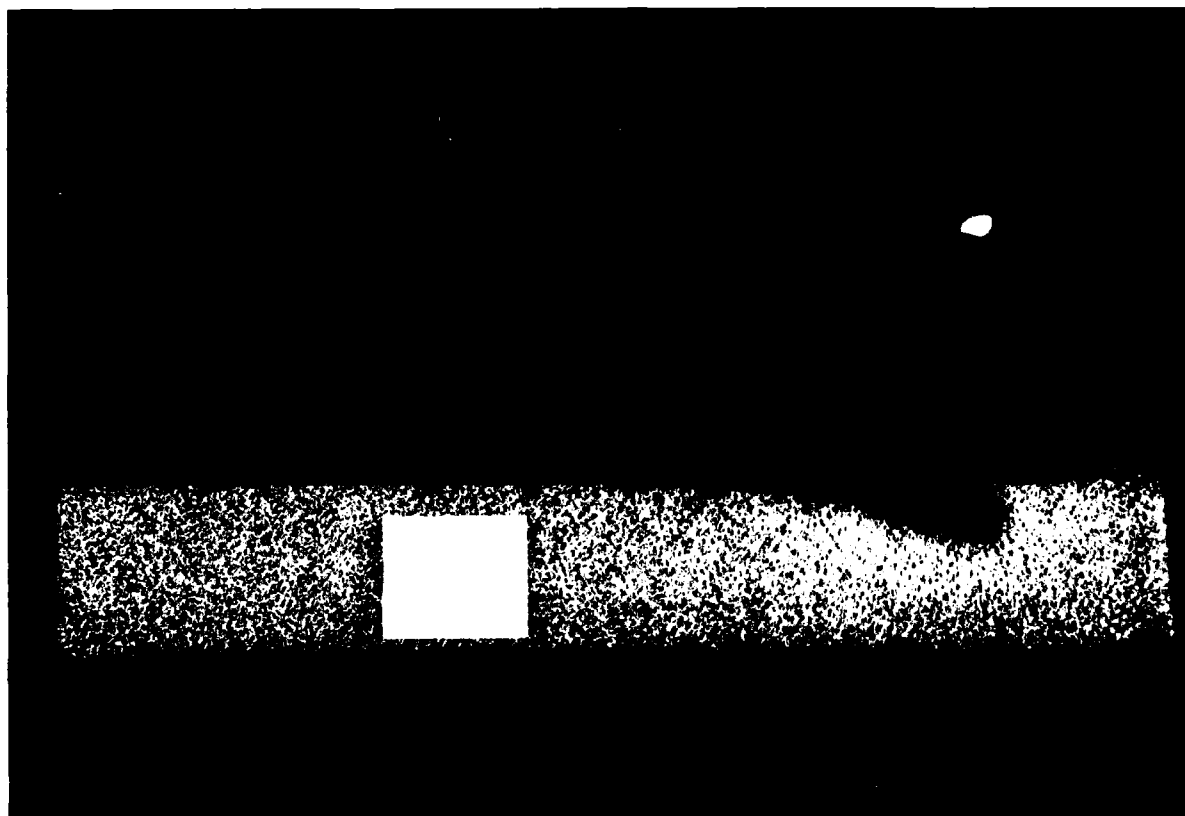


Figure A1-226. Sample 1-3-37, cross-sectional view.

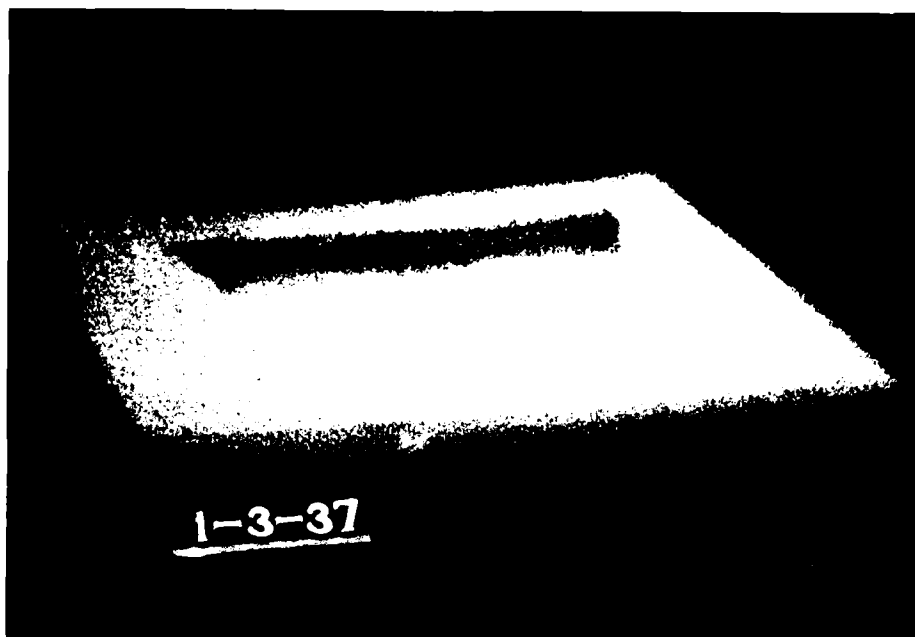


Figure A1-214. Sample 1-3-37, perspective front view.

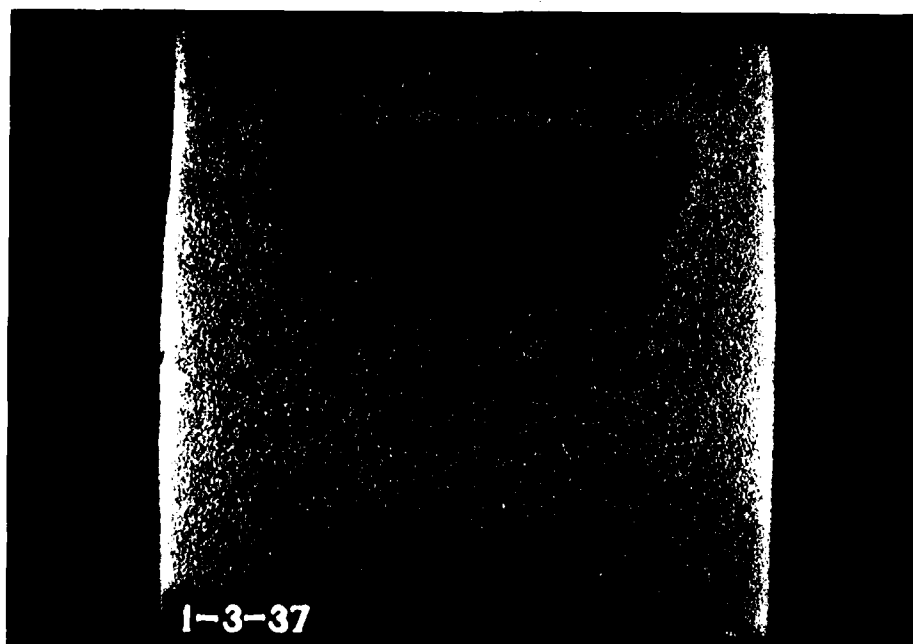


Figure A1-225. Sample 1-3-37, direct front view.



Figure A1-223. Sample 1-3-34, cross-sectional view.

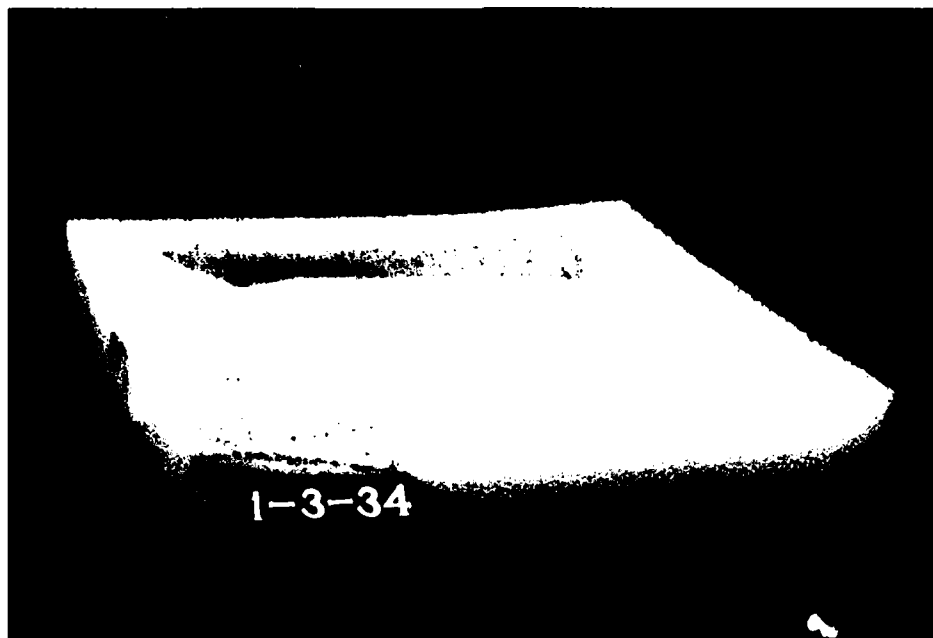


Figure A1-221. Sample 1-3-34, perspective front view.

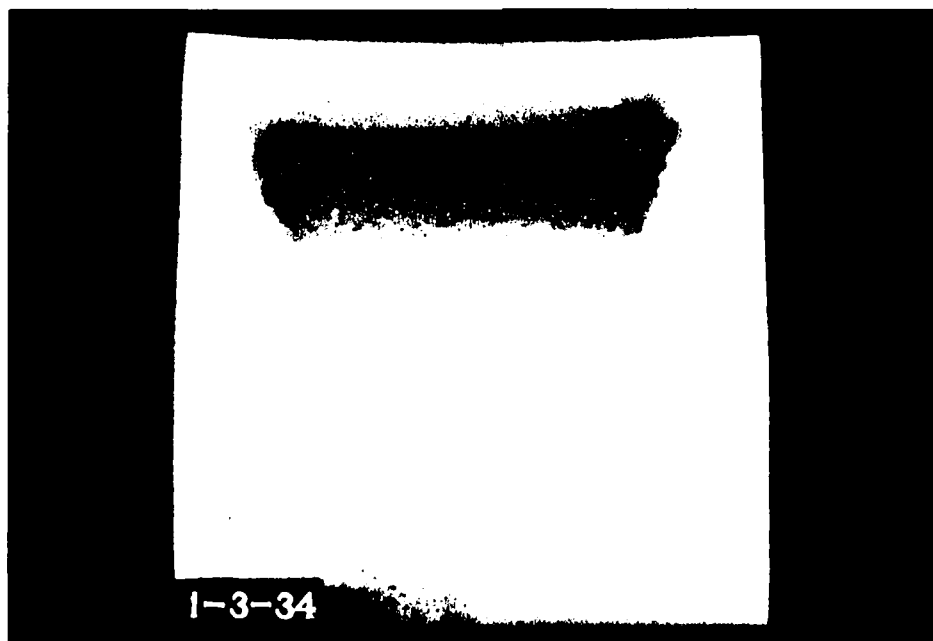


Figure A1-222. Sample 1-3-34, direct front view.

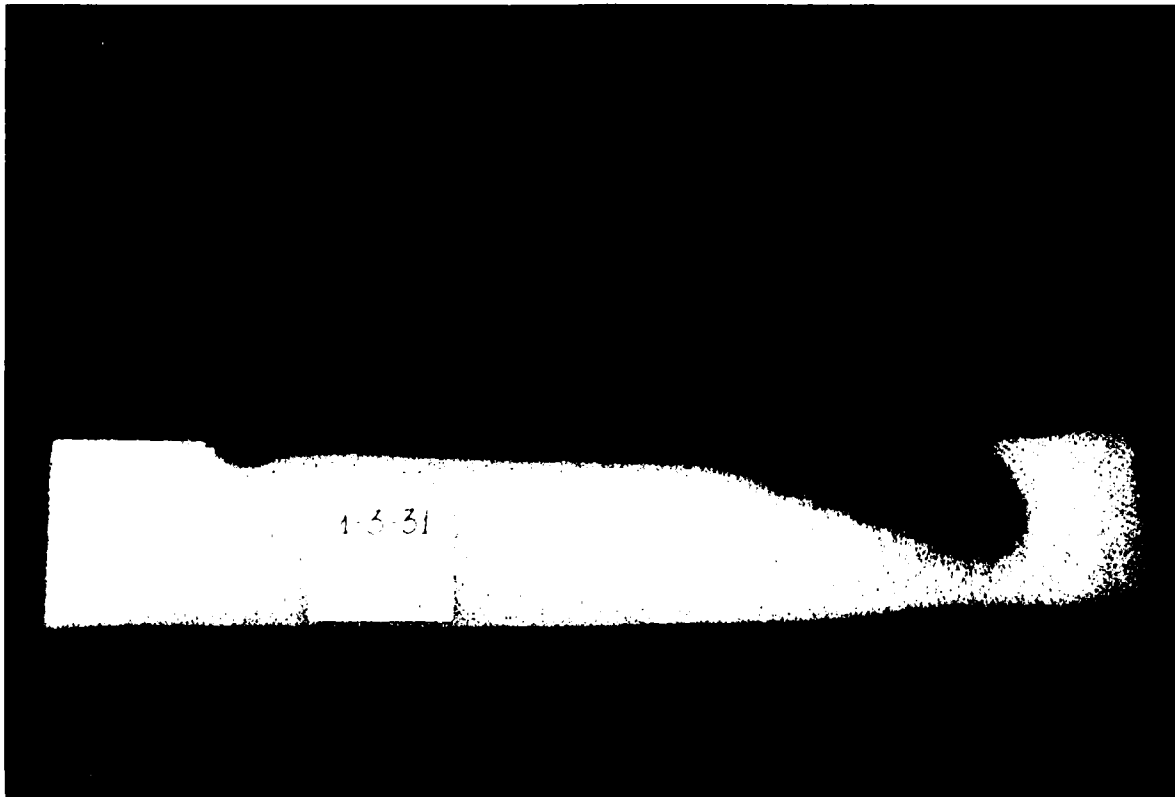


Figure A1-220. Sample 1-3-31, cross-sectional view.

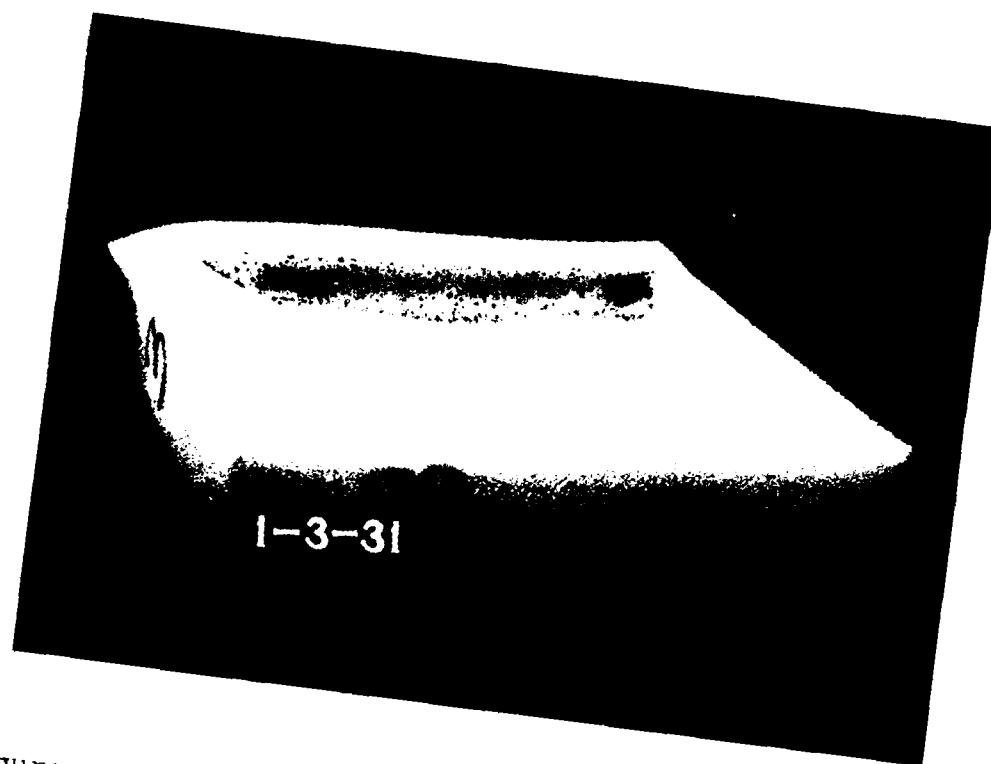


Figure A1-218. Sample 1-3-31, perspective front view.

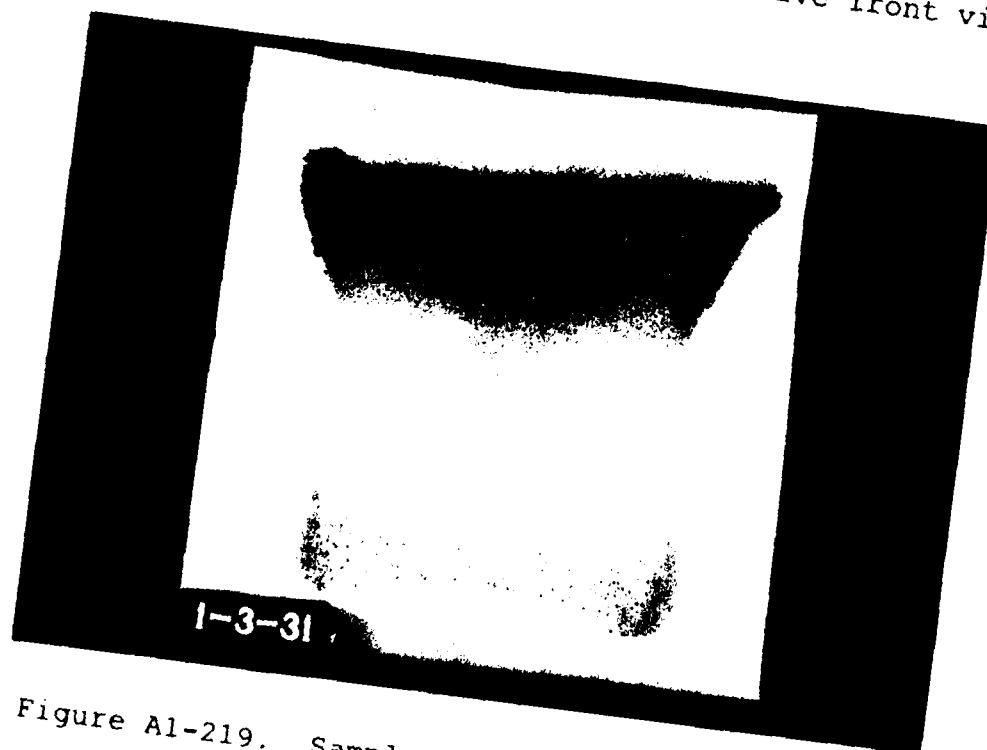


Figure A1-219. Sample 1-3-31, direct front view.

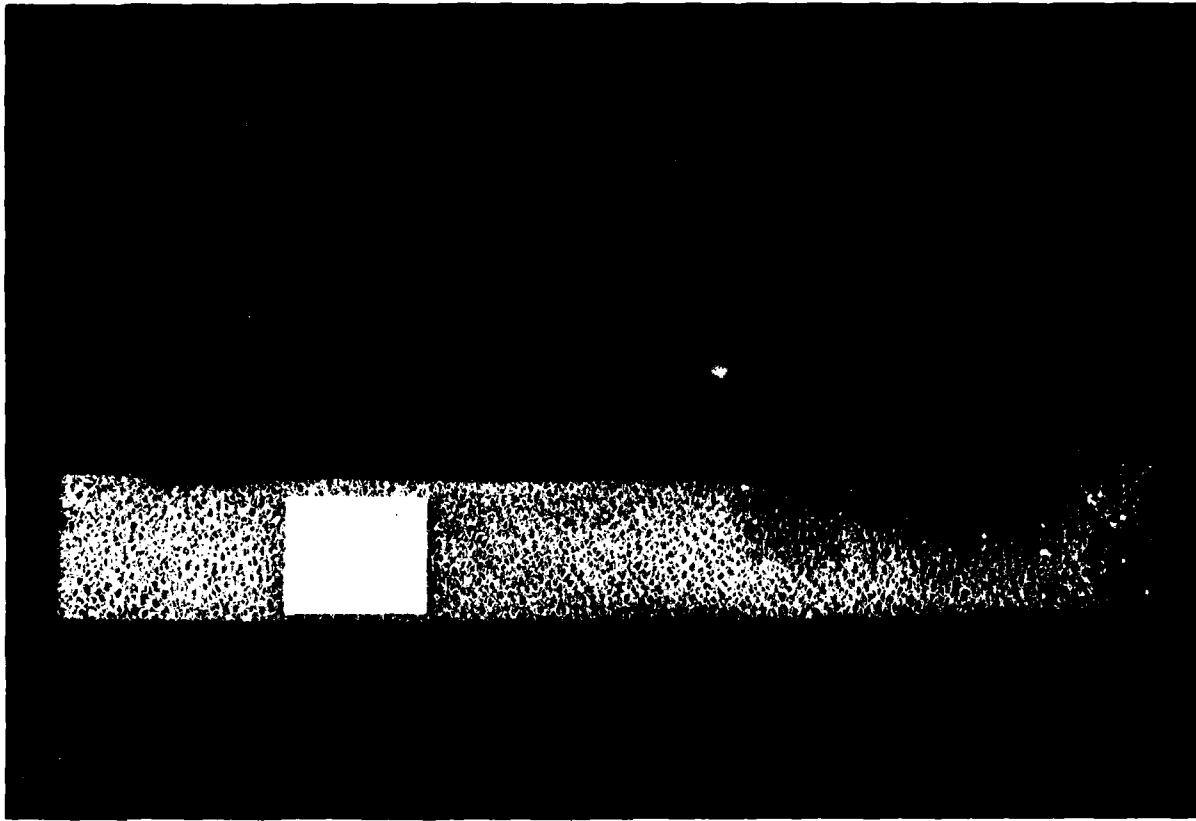


Figure A1-217. Sample 1-3-28, cross-sectional view.

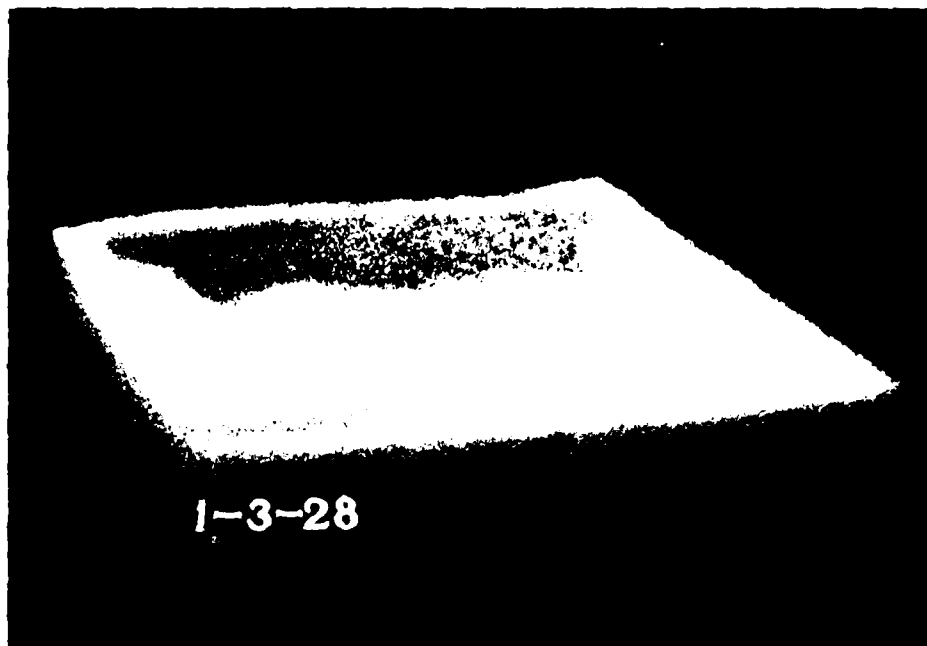


Figure A1-215. Sample 1-3-28, perspective front view.

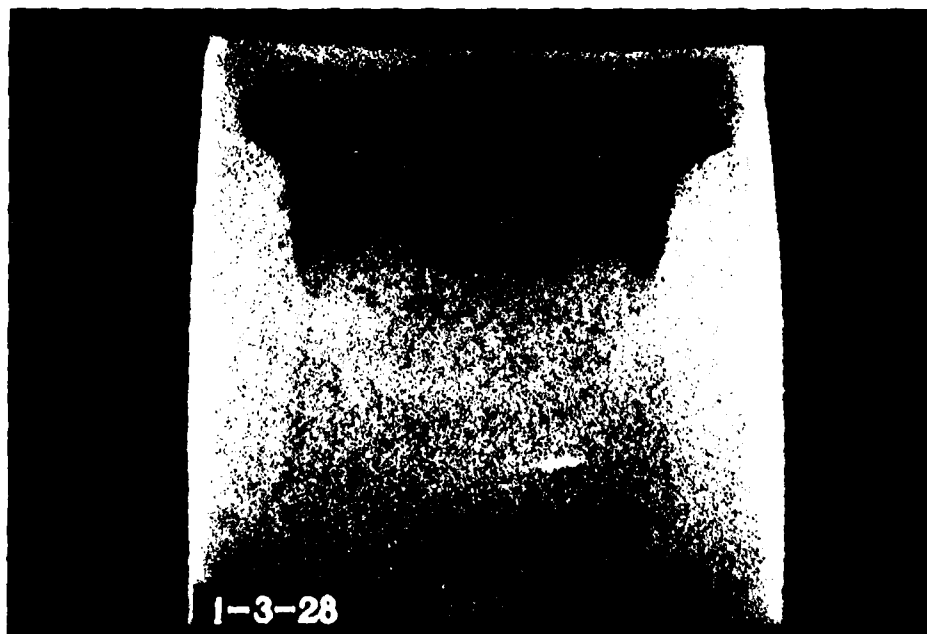


Figure A1-216. Sample 1-3-28, direct front view.

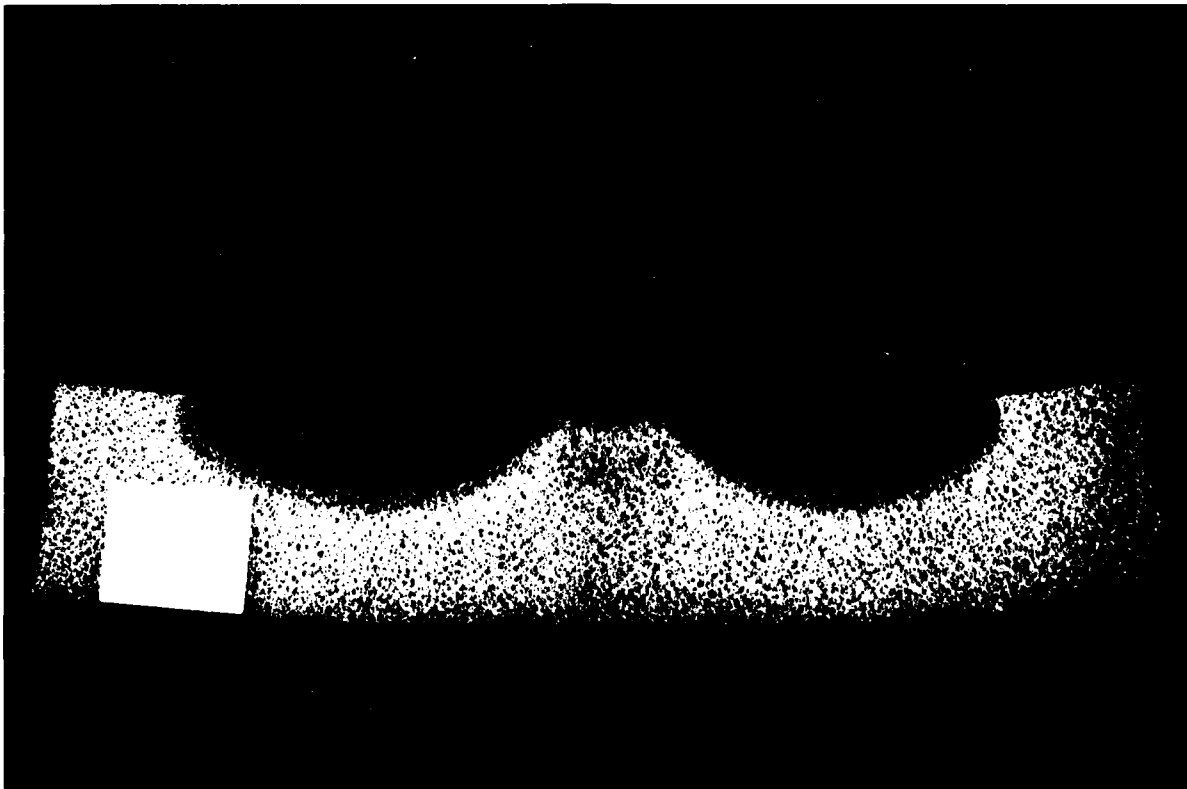


Figure A1-214. Sample 1-A-26, cross-sectional view.

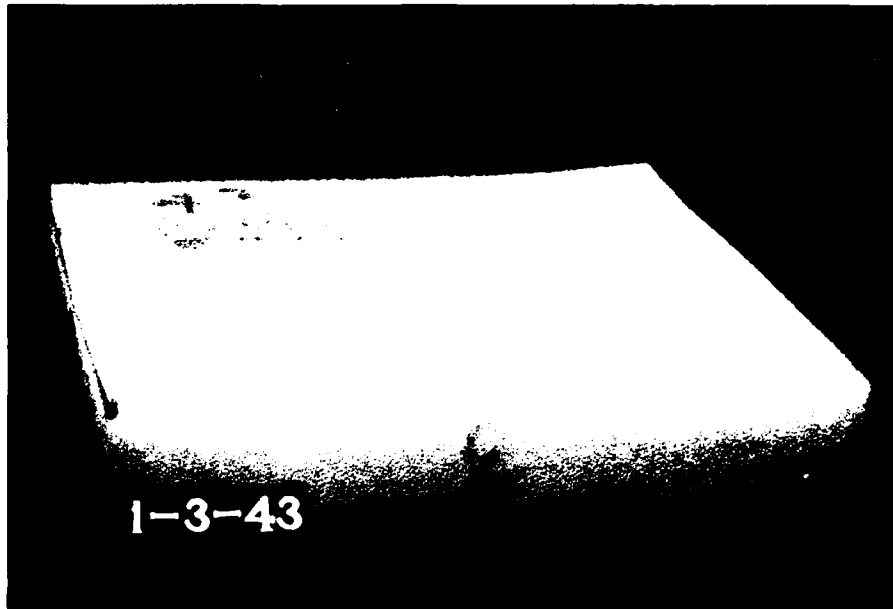


Figure A1-235. Sample 1-3-43, perspective front view.

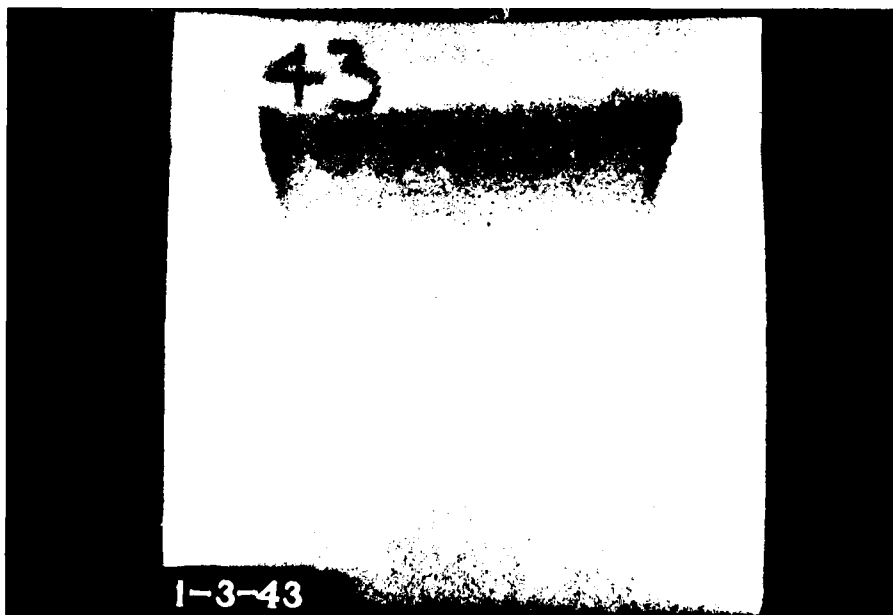


Figure A1-236. Sample 1-3-43, direct front view.

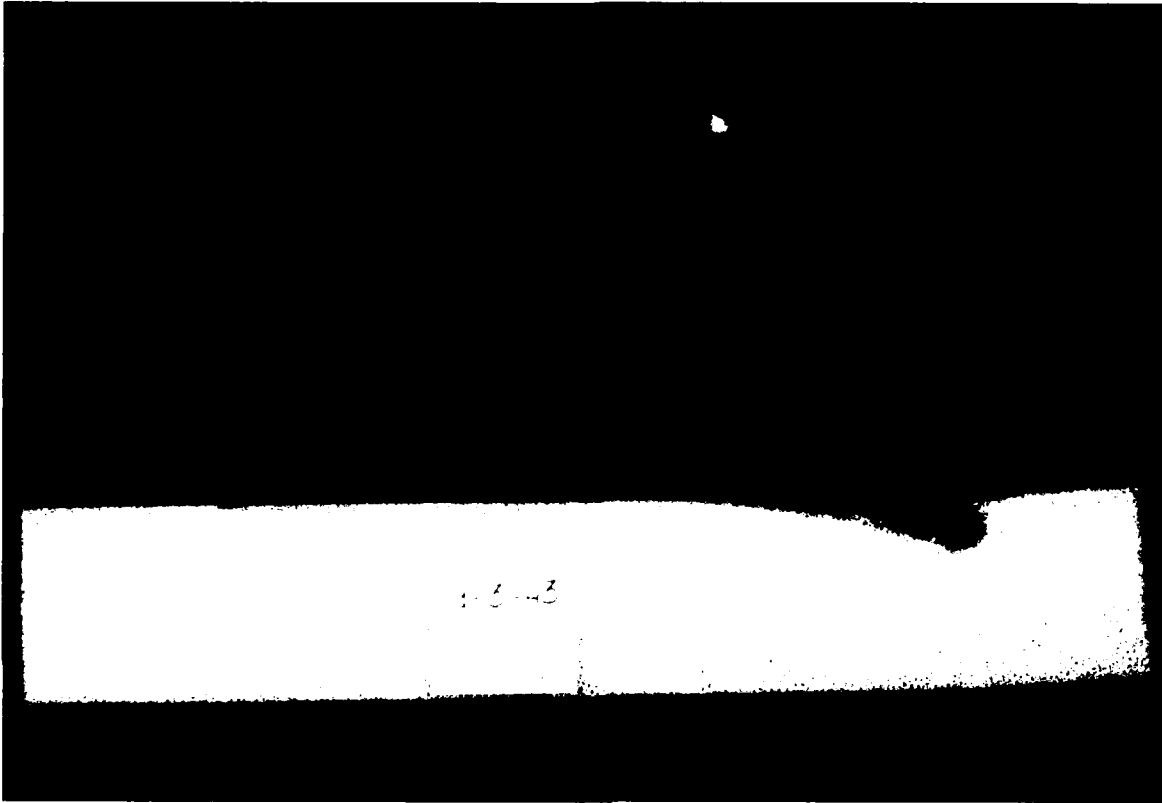


Figure A1-237. Sample 1-3-43, cross-sectional view.

APPENDIX 2

BROWN-STAINED BLUE FOAM IN F-4 AIRCRAFT

In 1977, a single F-4 aircraft, SN 69-7583, was retrofitted as a prototype with Type IV blue, coarse pore foam. This prototype kit was first used in evaluation tests in the McDonnell Aircraft Company F-4 fuel testing in February 1977 (Ref. A2-1) and it was then retrofitted into SN 69-7583. The foam was manufactured by SCOTFOAM Corporation and identified by Run Number W 9572. After 42 months of aircraft service, the blue foam was inspected during routine fuel tank service. A large amount of the foam was found to be stained brown in the areas of the level control valves, as shown in Figures A2-1 and A2-2. The white deposit on foam surface is silicone fuel tank sealant.

Samples were cut, as shown in Figure A2-3, and sent to SCOTFOAM Corporation and Union Carbide Corporation for analysis, to determine the source of the discoloration. From visual observations, this foam appeared to have experienced degradation. Therefore, physical properties of this foam were also determined. The results were compared with data for the blue foam used in the qualification tests (Ref. A2-2), that was also from Run W 9572. The difference in tensile strength between Slice 1 and Slice 2 (see Table A2-1) was at least partly due to pore size. From visual observation, Slice 1 had about 10 pores per inch (ppi) and Slice 2 had about 14 ppi. The overall average tensile strength of the brown-stained foam was about 20% lower than the average for the original foam (see Table A2-1). This decrease probably resulted from foam aging.

A2-1. J. M. Tirpack, "Validation of Extended Life Fuel Tank Foam," USAF PRAM Program Final Report, July 1977.

A2-2. T. O. Reed and W. D. Vahle, "Qualification Test Results for Scott Paper Company Hybrid Polyether Foam," Aeronautical Systems Division Technical Memorandum ENFEF-TM-79-08, December 1979.



Figure A2-1. F-4 brown-stained foam compared with new blue foam.




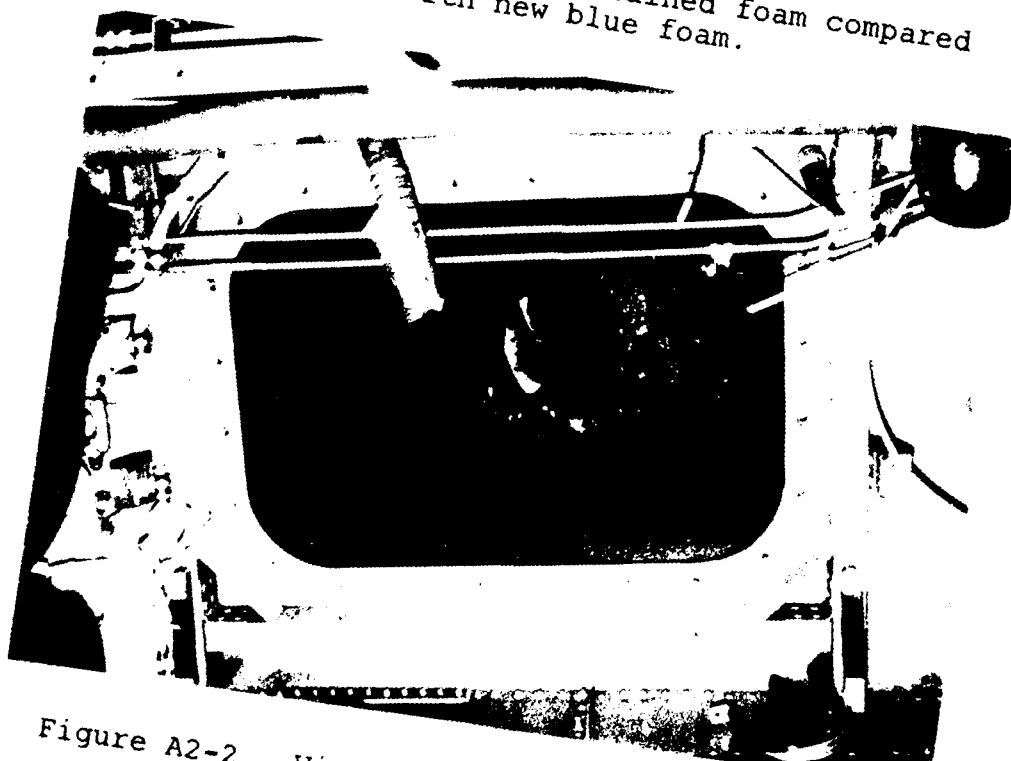


Figure A2-2. View of F-4 brown-stained foam in the fuel cell.

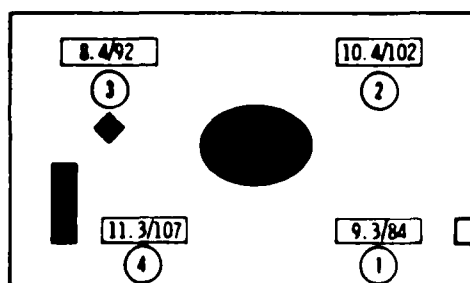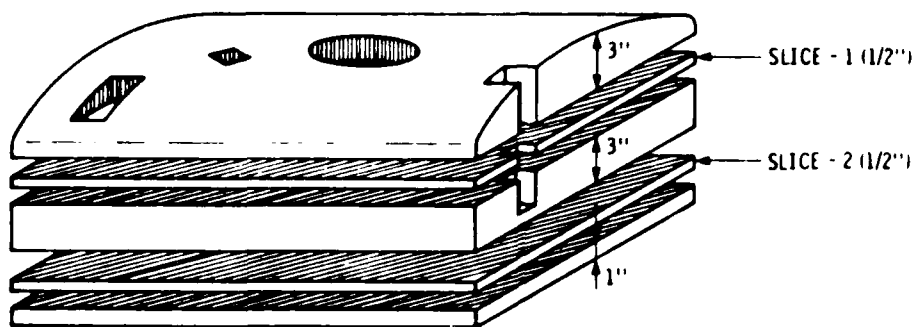

SLICE - 1
TENSILE LOCATIONS

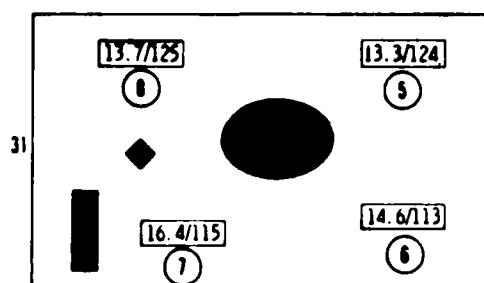

SLICE - 2
TENSILE LOCATIONS

Figure A2-3. Sample locations, F-4 (brown-stained) foam.

Extraction tests were conducted on the F-4 foam and on new foam. Soxhlet extraction with perchloroethylene removed the blue color from both samples (see Table A2-2). With acetone, some of the brown stain was removed from the F-4 foam. Its color became bluish-green, whereas the fresh foam did not change color upon extraction with acetone. Elemental analysis of this extract (after removal of acetone) showed differences in carbon, hydrogen and oxygen content, compared to an acetone extract from the fresh blue foam (see Table A2-3). Infrared spectra of the acetone extracts also showed some differences in relative peak intensities (see Figures A2-4 and A2-5, and Table A2-4. Ultraviolet spectra were also determined on the acetone extracts, no differences were observed (see Figure A2-6).

The white-colored globules that were present throughout the brown-stained foam were also analyzed. Infrared spectra confirmed that they were composed of a silicone composition (e.g., a silicone sealant). There was also a finely divided powder suspended within the silicone globules, which was probably an inorganic filler.

Although the concentrations of most of the metals found in the F-4 foam were higher than in fresh foam (see Table A2-5), the most probable source of the discoloration was a leak-checking dye. Other potential sources for the discoloration were additives in the fuels and the fuel tank sealants. In Table A2-6 are given the chemical compositions of fuel additives required for JP-4 and JP-8.

The leak checking dyes consist of oil-soluble organic liquids that do not contain reactive amino groups. The polyurethane foams have a high propensity to absorb organic compounds.

The use of acetone and perchloroethylene, solvents that have low dielectric constants, for the Soxhlet extractions leads to elution of organic compounds that also have low dielectric constants.

TABLE A2-1. PHYSICAL PROPERTIES OF FOAM SAMPLES

	F-4 (brown-stained) foam		Original W957L
	Sample location	Value	
Tensile strength, psi	Slice #1: 1	9.3	
	2	10.4	
	3	11.3	
	4	8.4	
	Range	8.4-11.3	
	Average	9.9	
	Slice #2: 5	13.3	
	6	14.6	
	7	16.4	
	8	13.7	
	Range	13.3-16.4	
	Average	14.5	
	Overall range	8.4-16.4	11.2-19.0
	Overall average	12.2	15.1
Elongation, %	Slice #1: 1	84	
	2	102	
	3	107	
	4	92	
	Range	84-107	
	Average	96	
	Slice #2: 5	124	
	6	113	
	7	115	
	8	125	
	Range	113-125	
	Average	119	
	Overall range	84-125	109-194
	Overall average	108	135
Tear strength, psi		4.9	
		4.6	
		4.4	
	Average	4.6	3.90
Compression load deflection, psi	25%	0.32	0.42
	65%	0.97	0.73

TABLE A2-2. SOXHLET EXTRACTION RESULTS

<u>Foam sample</u>	<u>Solvent</u>	<u>% Extractable</u>	<u>Foam color change</u>
F-4 (brown-stained)	H ₂ O	3.0	None
F-4 (brown-stained)	Hexane	10.9	None
F-4 (brown-stained)	Perchloroethylene	12.8	To beige
Fresh blue foam	Perchloroethylene	2.7	To white
F-4 (brown-stained)	Acetone	7.4	To bluish green
Fresh blue foam	Acetone	4.2	None

TABLE A2-3. ELEMENTAL ANALYSIS RESULTS FOR EXTRACTS

<u>Sample</u>	<u>%C</u>	<u>%H</u>	<u>%O</u>	<u>%N</u>	<u>Total</u>
F-4 (brown-stained) foam extract	70.06	8.86	9.39	6.77	95.08
Fresh blue foam extract	67.77	8.51	13.52	6.76	96.56

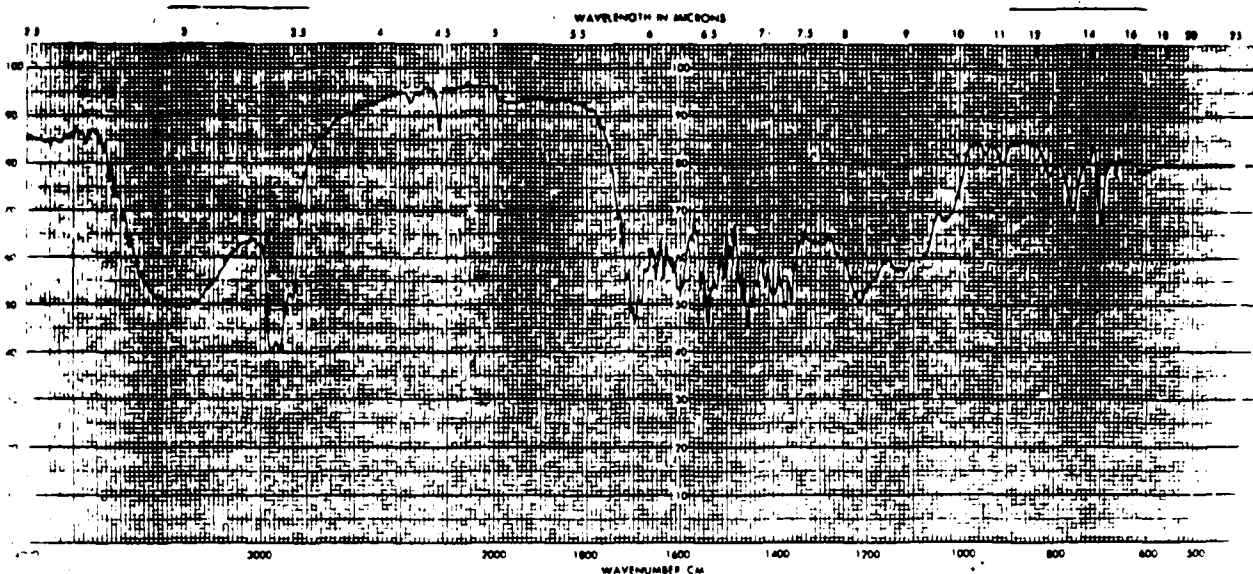


Figure A2-4. Infrared spectrum of acetone extract from F-4 (brown-stained) foam.

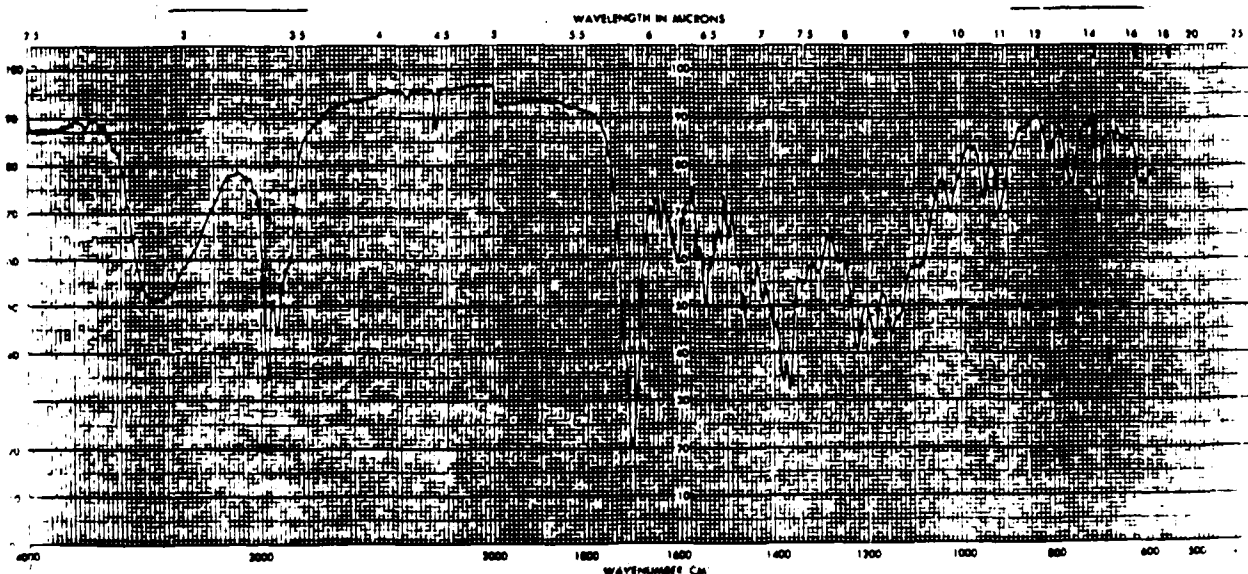


Figure A2-5. Infrared spectrum of acetone extract from fresh blue foam.

4-30-81 CFM

UV SPECTRA OF ACETONE EXTRACT FROM F-4 (BROWN STAINED) FOAM VS FRESH BLUE FOAM

CONCENTRATION - F-4 (BROWN STAINED) 1.06 mg/ml +
FRESH BLUE 0.92 mg/ml - - -

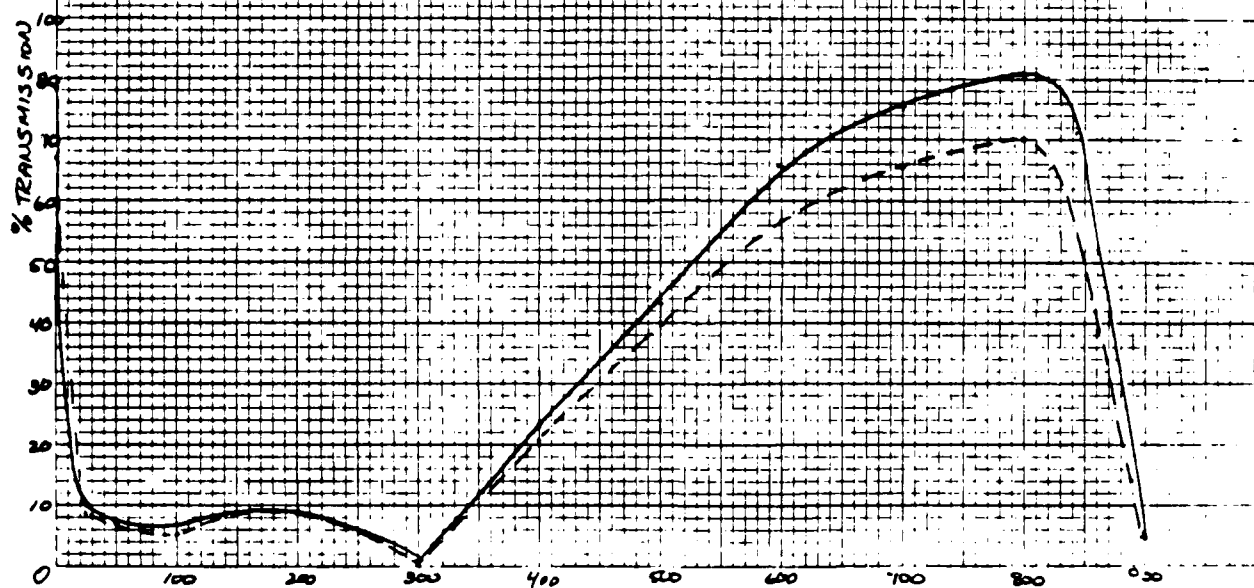


Figure A2-6. Ultraviolet spectra of acetone extracts from F-4 (brown-stained) foam and fresh blue foam.

TABLE A2-4. SUMMARY OF EXTRACTION TEST RESULTS

Extraction solvent	Fresh blue foam	Brown-stained foam
Perchloroethylene ^a	Color change to white 2.7 % weight loss	Color change to beige 12.8% weight loss
Acetone ^a	No color change 4.2 % weight loss IR - Urethane Acrylonitrile Styrene	Color change to bluish-green 7.5% weight loss IR - Urethane Acrylonitrile Styrene
Methanol ^b	No color change IR - Urethane Acrylonitrile Styrene	No color change IR - Urethane Acrylonitrile Styrene Alkylsulfonate

^aSoxhlet extraction, performed by SCOTTFOAM Corporation.

^bRoom temperature extraction, performed by Union Carbide Corporation.

TABLE A2-5. RESULTS FOR METAL ANALYSES^a

<u>Metal</u>	<u>Fresh blue foam</u>	<u>Brown-stained foam</u>
Aluminum	9	25
Barium	0.3	2
Calcium	11	31
Cadmium	1	115
Chromium	5.5	8
Copper	81	55
Iron	38	73
Magnesium	7	13
Manganese	0.25	1.3
Molybdenum	0.7	2
Sodium	14	121
Nickel	1	3
Lead	2.5	72
Antimony	3	4
Total ash	0.14	0.31

^aAnalyses performed by Union Carbide Corporation, using an inductively coupled plasma technique.

TABLE A2-6. FUEL ADDITIVES FOR JP-4 AND JP-8,
AND FUEL LEAK TESTING DYES

Additive	Compositions	Amount added
Antioxidants	Hindered alkylphenols (e.g., 2,6-di-tert-butyl-4-methylphenol)	0 to 24 mg/L
Metal deactivators	N,N'-disalicylidene-1,2-propylenediamine and N,N'-disalicylidene-2,2-cyclohexylenediamine	0 to 5.8 mg/L
Corrosion inhibitors	Primarily fatty acids, (e.g., dilinoleic acid)	10 to 50 mg/L
Fuel system icing inhibitor	Ethylene glycol monomethyl ether	0.10 to 0.20%
Static dissipators	Shell ASA-3 -Chromium salt of alkyl-salicylic acid -Calcium salt of dodecyl-sulfosuccinic acid -Methacrylate-vinylpyridine copolymer Dupont Stadis 450 -Polysulfone copolymer -Polymeric polyamide	1 to 2 ppm

TABLE 1 (A5-1)
EXPOSURE SCHEDULE FOR BLUE FOAMS

Group No.	Total Exposure (Hours) Time	<u>Date</u> In the Sunlighter	<u>Date</u> Out of Sunlighter
1	40	6-7-83 9:00 a.m.	6-9-83 5:00 p.m.
2	80	6-7-83 9:00 a.m.	6-14-83 5:00 p.m.
3	120	6-9-83 5:00 p.m.	6-20-83 5:00 p.m.
4	160	6-14-83 5:00 p.m.	6-24-83 5:00 p.m.
5	200	6-20-83 5:00 p.m.	6-29-83 5:00 p.m.

Group 1 → 7-1-1, 7-1-2, 7-1-3, 7-1-4

Group 2 → 7-2-1, 7-2-2, 7-2-3, 7-2-4

Group 3 → 7-3-1, 7-3-2, 7-3-3, 7-3-4

Group 4 → 7-4-1, 7-4-2, 7-4-3, 7-4-4

Group 5 → 7-5-1, 7-5-2, 7-5-3, 7-5-4

A like number of samples of each type foam were subjected to accelerated agings in JP-5 aircraft fuel. Wide-mouth, one quart glass containers were used to hold two foam specimens submersed in JP-5. The jar openings were covered with aluminum foil, and lids were installed. The containers were maintained at 200°F in a Thelco Model 18 air oven. At the completion of each cycle, the lids were removed and the fuel was poured off. The specimens were returned to Monsanto in the glass containers. The fuel aging schedule is shown in Table 6.

INTRODUCTION

The facilities of the University of Dayton Research Institute were utilized for conditioning a number of samples of reticulated foam materials. Specimens cut from blue, red, and yellow foams were subjected to ultraviolet exposure, accelerated aging in humidity, and accelerated aging in aircraft fuel. Schedules for the aging procedures were provided by Monsanto Research Corporation. Specimens were returned to Monsanto at the completion of each weekly cycle.

PROCEDURE

The Sunlighter IV ultraviolet test chamber was utilized for ultraviolet exposures of foam specimens for up to 200 hours, according to the testing code provided by Monsanto. The blue foams were exposed according to the schedule shown in Table 1. Chamber temperature and observed specimen discolorations were recorded daily. These are summarized in Table 2.

After completing the exposures for 20 blue foam specimens, the same procedure was repeated for the red and yellow foam specimens. The aging schedule for the red and yellow foams is shown in Table 3. Chamber temperature and observed specimen discolorations are listed in Table 4. The only anomaly noted during either aging cycle was an inadvertent heater operation during the Group V red and yellow foam exposure, allowing the chamber temperature to increase approximately 15 degrees above the nominal chamber temperature of 125°F for approximately 48 hours.

The same quantities of foams were exposed to accelerated aging in a Blue M Humid Flow humidity cabinet. Test conditions were maintained at 200°F and 95 percent relative humidity. The testing code for this accelerated aging was also provided by Monsanto. Aging of the red and yellow foam specimens was discontinued at the end of the third week. Both the red and yellow foams had undergone complete reversion at that time. Humidity agings are listed in Table 5.

FIRE SAFETY OF FOAMS

Prepared For:
Monsanto Research Corporation

Prepared By:

J. N. Dues
L. D. Pike
D. McCullum

UNIVERSITY OF DAYTON
RESEARCH INSTITUTE
DAYTON, OHIO 45469

August 1983



The University of Dayton

August 9, 1983

Monsanto Research Corporation
Attn: Mr. Leo Parts
Dayton Laboratory
1515 Nicholas Road
Dayton, Ohio 45407

SUBJECT: Monsanto Purchase Order D25759

Dear Mr. Parts:

Enclosed are two copies of a report entitled "Fire Safety of Foams" documenting the aging cycles of blue, red, and yellow reticulated foam samples.

Sincerely,

Benjamin H. Wilt
Research Engineer

BHW/skl

Enclosures

APPENDIX 5

REPORT ON ACCELERATED AGING OF FOAM SPECIMENS
IN SIMULATED SUNLIGHT TEST CHAMBER,
HUMIDITY CABINET, AND AIR OVEN

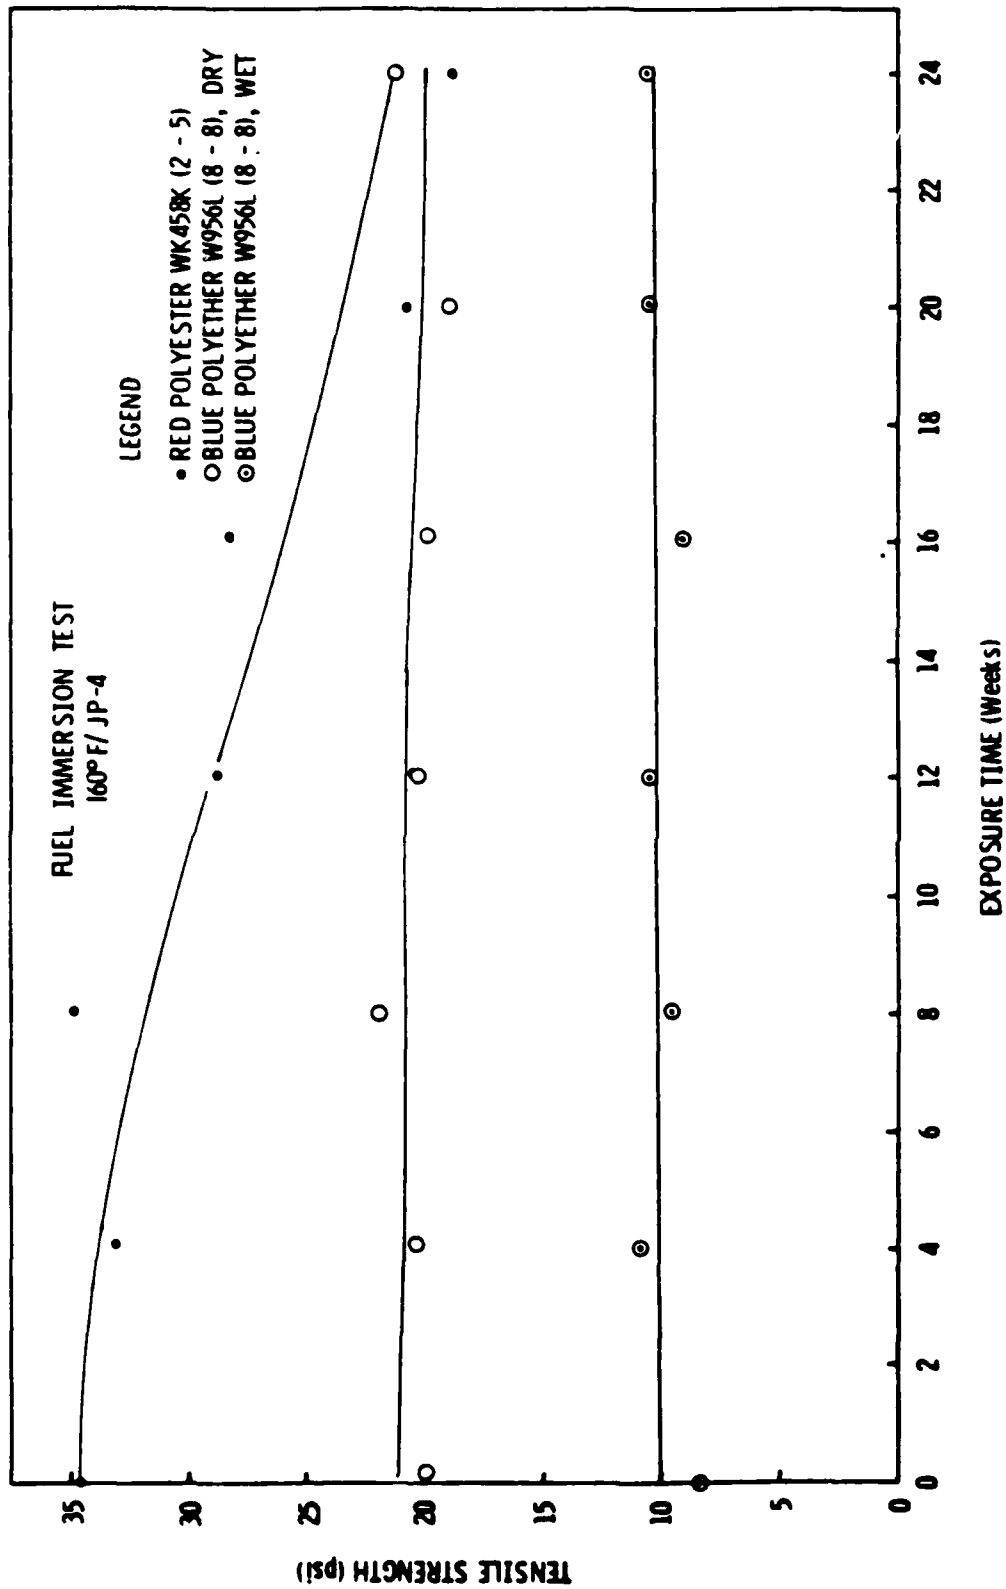


Figure A4-2. Tensile strengths of polyurethane foam in accelerated fuel immersion aging tests.

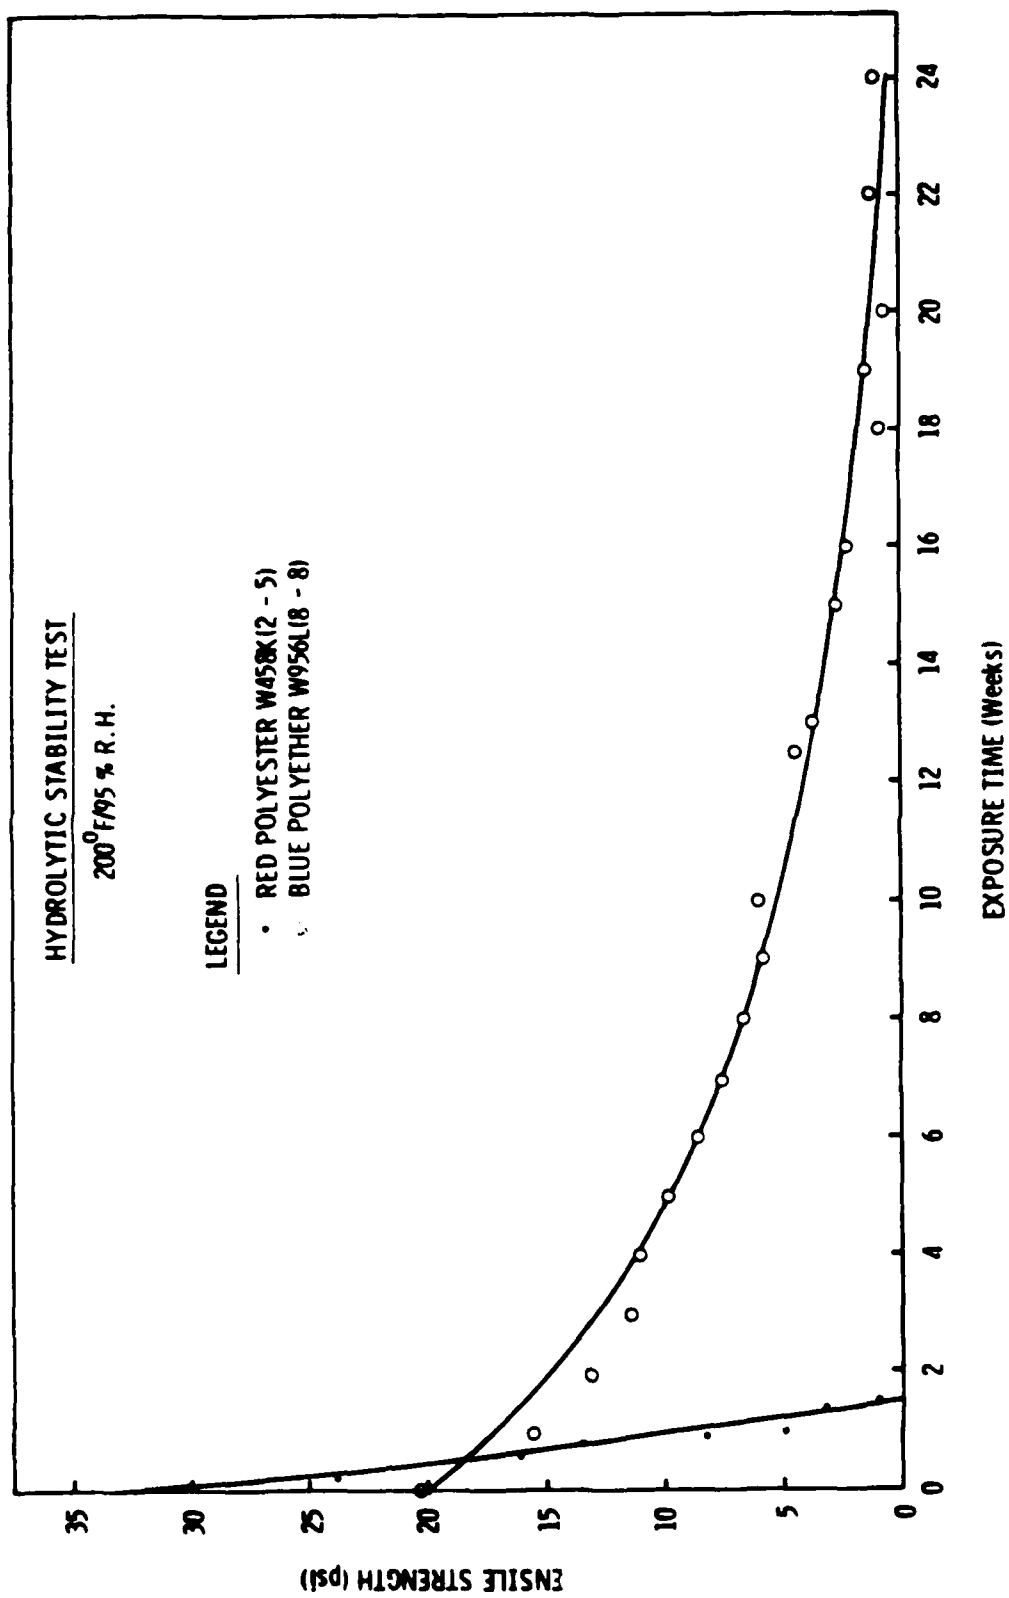


Figure A4-1. Tensile strengths of polyurethane foam in accelerated aging tests in air.

APPENDIX 4
TENSILE STRENGTHS OF POLYURETHANE
FOAMS AS FUNCTIONS OF AGING

(Data from Reference 1, cited in the text of this report.)

These gases and the suspended inorganic particles (K_2SO_4 and PbO) are ingested into the fuel system through the overboard vent mast located on the bottom and near the tail section of the aircraft. The vent mast is designed to provide a 0.5 psig pressure on the fuel system. During gun firing, the aircraft is typically descending and air containing the gun gases flows into the fuel sytem to maintain the 0.5 psig pressure.

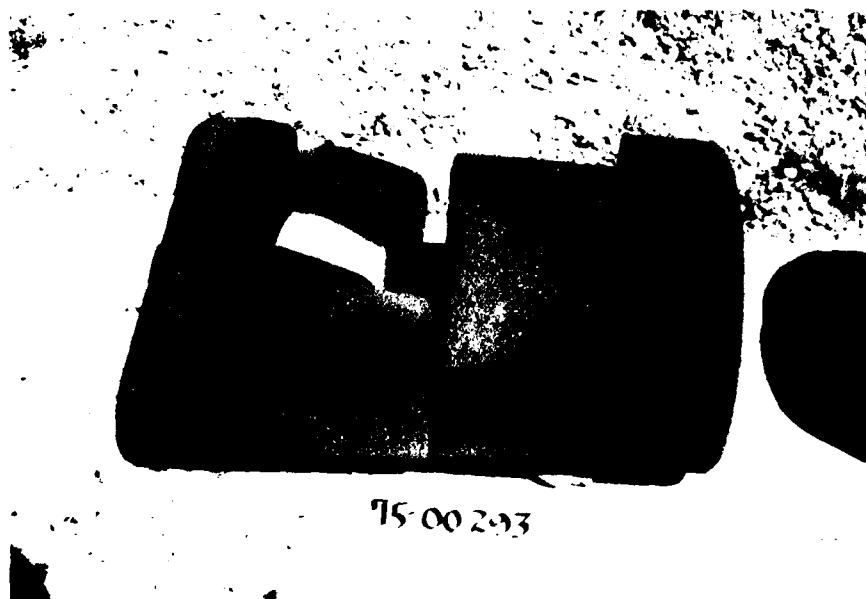


Figure A3-1. Red foam from A-10 aircraft (SN 75-00293) vent collector tank.



Figure A3-2. End view of red foam vent collector tank kit.

In 1981, an A-10 aircraft, SN-75-00293, that contained Type III red, polyester foam, was inspected for potential fire damage to the foam. Visual inspection of the foam in the vent collector tank revealed a very dark stain or burn pattern in the void area around the overboard vent tube (see Figures A3-1 and A3-2). A close visual examination revealed that the foam had not been burned or damaged, but that the discoloration was caused by a deposit on the surface. It was also noted that the overall color of the foam was a dark red or orange which is a characteristic of aged red foam. The age of the foam in this aircraft was approximately 4 years.

Infrared (IR) and emission spectroscopic analyses were performed by the AF Materials Laboratory on this vent collector tank red foam, to determine the position and source of the deposit. The IR analysis revealed no difference between the blackened portion, and the unaffected part of the foam sample. Also, a GPC analysis did not indicate the presence of any thermal degradation products in the blackened foam. An aqueous extract of the blackened foam gave a strong positive test for potassium and nitrate ions. This result provides a strong indication that the black stain was a result of gun gas deposition on the foam.

The A-10 aircraft is equipped with a CAS 30 mm cannon; each round contains approximately 2300 grains of propellant. A black powder primer, which is about 1% of the total propellant, is composed of about 75% KNO_3 , 15% carbon and 10% sulfur. When the round is fired, the propellant is converted almost totally to gases in the following percentages (by volume): 45.9% CO , 8.8% CO_2 , 17.4% H_2O , 17.0% H_2 , 10.5% N_2 , 0.08% K_2SO_4 , and 0.075% PbO .

APPENDIX 3
ANALYSIS OF SOOT-STAINED
RED FOAM IN A-10 AIRCRAFT

According to data in Table A2-2, 12.8% of mass was extracted with perchloroethylene from the F-4 foam; its color was changed to beige. Fresh foam lost 2.7% mass upon extraction and its color was changed to white. Acetone extracted 7.4% mass from the F-4 foam, changing its color to bluish-green; 4.2% mass was extracted from the new foam with acetone, without color change.

The perchloroethylene extraction test results indicate that the substances which caused discoloration were extracted along with the blue pigments used in the foam. In acetone tests, the discoloring substances were removed without affecting the blue dyes. The beige and bluish green colors, resulting from these tests, could be due to the aging of the foam while in the aircraft.

TABLE 2 (A5-2)

BLUE FOAM SPECIMEN DISCOLORATION AND CHAMBER
TEMPERATURE DURING OPERATION OF SUNLIGHTER

<u>Discoloration</u>	<u>Temp.</u>	<u>Date</u>
All specimens in Groups I and II are about 1/8" discolored on top surface	124°F	6-8-83
All specimens in Groups I and II are about 1/4" discolored on top surface	126°F	6-9-83
All Group II specimens have 1/4" discoloration. All Group III specimens have 1/8" discoloration	126°F	6-10-83
Both Groups II and III - all specimens discolored to about 1/4"	123°F	6-13-83
Both Groups II and III - all specimens discolored to about 1/4"	124°F	6-14-83
Specimens in Group III are about 1/2" discolored	125°F	6-15-83
Specimens in Group IV are about 1/8" discolored		
Group III about 1/2" discolored	125°F	6-16-83
Group IV about 1/4" discolored		
Group III about 1/2" discolored	125°F	6-17-83
Group IV about 1/4" discolored		
Group III about 1/2" discolored	122°F	6-20-83
Group IV about 1/4" discolored		
Group IV about 1/4" discolored	123°F	6-22-83
Group V about 1/8" discolored		

TABLE 2 (CONCLUDED) (A5-2)

BLUE FOAM SPECIMEN DISCOLORATION AND CHAMBER
TEMPERATURE DURING OPERATION OF SUNLIGHTER

<u>Discoloration</u>	<u>Temp.</u>	<u>Date</u>
Group IV about 1/2" discolored	123°F	6-22-83
Group V about 1/8" discolored		
Group IV about 1/2" discolored	123°F	6-23-83
Group V about 1/4" discolored		
Group IV (out) specimens were about 1/2" discolored	125°F	6-24-83
Group V about 1/8" discolored		
Group V specimens are about 3/8" discolored	124°F	6-27-83
Group V specimens are about 3/8" discolored	125°F	6-28-83
Group V specimens about 1/2" discolored	126°F	6-29-83

TABLE 3 (A5-3)

EXPOSURE SCHEDULE FOR RED AND YELLOW FOAMS

Group No.	Total Exposure (Hours) Time	<u>Date</u> In the Sunlighter	<u>Date</u> Out of Sunlighter
1	40	7-5-83 9:00 a.m.	7-7-83 5:00 p.m.
2	80	7-5-83 9:00 a.m.	7-12-83 5:00 p.m.
3	120	7-7-83 5:00 p.m.	7-18-83 5:00 p.m.
4	160	7-12-83 5:00 p.m.	7-22-83 5:00 p.m.
5	200	7-18-83 5:00 p.m.	7-27-83 5:00 p.m.

Group I → Red 7-6-1 Yellow 7-11-1
 7-6-2 7-11-2

Group II → Red 7-7-1 Yellow 7-12-1
 7-7-2 7-12-2

Group III → Red 7-8-1 Yellow 7-13-1
 7-8-2 7-13-2

Group IV → Red 7-9-1 Yellow 7-14-1
 7-9-2 7-14-2

Group V → Red 7-10-1 Yellow 7-15-1
 7-10-2 7-15-2

TABLE 4 (A5-4)

RED AND YELLOW FOAM SPECIMEN DISCOLORATION AND CHAMBER
TEMPERATURE DURING OPERATION OF SUNLIGHTER

<u>Discoloration</u>	<u>Temp.</u>	<u>Date</u>
About 1/16" discoloration on all specimens in Groups I and II	124°F	7-6-83
About 1/8" discoloration on all specimens in Groups I and II	124°F	7-7-83
About 1/8" discoloration on all specimens in Groups II	125°F	7-8-83
About 1/6" discoloration on specimens in Group III		
All specimens in Group III about 1/16" discoloration	125°F	7-11-83
All specimens in Group II about 1/8" discoloration		
All specimens in Group III about 1/8" discoloration	124°F	7-12-83
All specimens in Group II about 1/4" discoloration		
All specimens in Group III about 1/8" discoloration	123°F	7-13-83
All specimens in Group IV about 1/16" discoloration		
All specimens in Group III about 3/16" discoloration	124°F	7-14-83
All specimens in Group IV about 1/8" discoloration		
All specimens in Group III about 1/4" discoloration	123°F	7-15-83
All specimens in Group IV about 1/8" discoloration		

TABLE 4 (CONCLUDED) (A5-4)

RED AND YELLOW FOAM SPECIMEN DISCOLORATION AND CHAMBER
TEMPERATURE DURING OPERATION OF SUNLIGHTER

<u>Discoloration</u>	<u>Temp.</u>	<u>Date</u>
All specimens in Group III about 5/16" discoloration	125°F	7-18-83
All specimens in Group IV about 3/16" discoloration		
All specimens in Group IV about 3/16" discoloration	123°F	7-19-83
All specimens in Group V about 1/16" discoloration		
All specimens in Group IV about 3/16" discoloration	125°F	7-20-83
All specimens in Group V about 1/8" discoloration		
All specimens in Group IV about 1/4" discoloration	124°F	7-21-83
All specimens in Group V about 1/8" discoloration		
All specimens in Group IV about 1/4" discoloration (out of QU)	124°F	7-22-83
All specimens in Group V about 3/16" discoloration		
All specimens in Group V about 1/4" discoloration*	126°F**	7-25-83
All specimens in Group V about 3/8" discoloration	126°F	7-26-83
All specimens in Group V about 3/8" discoloration	126°F	7-27-83

* Heated inadvertently, turned on from 7-22-83 to 7-25-83;
chamber temperature was about 140°F.

** Temperature was taken at 5:00 p.m.

TABLE 5 (A5-5)

EXPOSURE SCHEDULE FOR BLUE, RED, AND YELLOW FOAMS.
ACCELERATED AGING AT 200°F, 95% RH

Foam	Exposure time, weeks				
	1	2	3	4	5
Blue	8-1-1	8-2-1	8-3-1	8-4-1	8-5-1
	-2	-2	-2	-2	-2
	-3	-3	-3	-3	-3
	-4	-4	-4	-4	-4
Red	8-6-1	8-7-1	8-8-1	8-9-1	8-10-1
	-2	-2	-2	-2	-2
Yellow	8-11-1	8-12-1	8-13-1	8-14-1	8-15-1
	-2	-2	-2	-2	-2

TABLE 6 (A5-6)

EXPOSURE SCHEDULE FOR BLUE, RED, AND YELLOW FOAMS.
ACCELERATED AGING AT 200°F IN JP-5

Foam	Exposure time, weeks				
	1	2	3	4	5
Blue	9-1-1	9-2-1	9-3-1	9-4-1	9-5-1
	-2	-2	-2	-2	-2
	-3	-3	-3	-3	-3
	-4	-4	-4	-4	-4
Red	9-6-1	9-7-1	9-8-1	9-9-1	9-10-1
	-2	-2	-2	-2	-2
Yellow	9-11-1	9-12-1	9-13-1	9-14-1	9-15-1
	-2	-2	-2	-2	-2

APPENDIX 6

EMISSION SPECTROGRAPHIC ANALYSIS REPORT ON
POLYURETHANE FOAM FROM AN A-10 AIRCRAFT

BOWSER-MORNER Testing Laboratories, Inc.

CORPORATE ADDRESS • 420 Davis Ave • P.O. Box 51 • Dayton, Ohio 45401-0051 • 513/253-8805
TOLEDO DISTRICT • 122 S. St. Clair St • P.O. Box 838 • Toledo, Ohio 43696-0838 • 419/255-8200
KENTUCKY DISTRICT • Route 8 West • P.O. Box 636 • Maysville, Kentucky 41056-0636 • 606/564-6711

LABORATORY REPORT

Report to Monsanto Research Corporation
P. O. Box 8 Station B
Dayton, Ohio 45407
Attn: Mr. Leo Parts

Date February 14, 1983
Laboratory No N 020320
Authorization D-24325

Report on Spectrographic Comparative Analysis of Foam Samples for Metallic Contamination:

TEST PROCEDURE:

The submitted foam sample was suspected to be contaminated with unknown oxides or residues. The contaminated foam was separated from the non-contaminated portion. The contaminated foam and the non-contaminated foam were ashed and the residues from the ash were analyzed by spectrographic procedures. We utilized the DC arc for a total energy transformation and photographed the spectra that was produced.

Note:

X indicates that the element is present in the non-contaminated portion of the foam. The numerical comparative data is graduated from IX (the least intense) to 100X (the greatest intensity).

- continued -



Monsanto Research Corporation

Page 2

Lab. No.: N 020320

TEST RESULTS:

<u>Element</u>	<u>Non-Contaminated</u>	<u>Contaminated</u>	<u>Portion</u>
Potassium			Major*
Aluminum	X	25 to 100X	Major
Iron	X	15 to 30X	Major
Silicon	X	15 to 30X	Major
Lead	X	20 to 50X	Major
Manganese	X	15 to 30X	Minor
Magnesium	X	15 to 30X	Minor
Tin	X	2X	Trace
Copper	X	5X	Trace
Titanium	X	10X	Minor
Nickel	<X	5X	Trace
Calcium	<X	15 to 30X	Minor
Boron	<X	4X	Trace
Sodium	X	20 to 50X	Major

Major: estimate >10%

Minor: estimate 1 to 10%

Trace: estimate <1.0%

*Methodology used was not appropriate for proper numerical comparison.

Respectfully Submitted,

BOWSER-MORNER, Inc.

Samuel Lucas Jr.
Samuel Lucas, Jr.
Chief Chemist
Special Metals Chemistry

1-Client
2-File
SL/pc

APPENDIX 7

SURFACE ANALYSIS REPORT ON POLYURETHANE
FOAM FROM AN A-10 AIRCRAFT



The University of Dayton

February 15, 1983

Mr. Leo Parts
Monsanto Research Corp.
Dayton Laboratory
Dayton, Ohio 45407

Dear Mr. Parts:

The filter material was initially analyzed using scanning electron microscopy (SEM) in conjunction with energy dispersive x-ray analysis (EDXA). The back of the filter, which was not discolored, was used as a control.

SEM photographs (see Figures 1 and 2) show the typical morphology of the deposit. At higher magnification in Figure 3 it can be seen that the deposit is an agglomerate of particles approximately 2 μm in diameter. EDXA of this area (see Figure 4) showed it to be high in K with a small amount of Pb and Fe. EDXA is only sensitive to those elements whose atomic weight is greater than Na. This means that the lighter elements such as C, O, and N which certainly are present, will not show any characteristic peaks.

Figure 5 shows the control sample which has no deposit on it. The EDXA spectra (see Figure 6) showed primarily background which is indicative of primarily light elements. A trace of K is present in the control which is probably the result of some of the contaminant which penetrated the filter.

Figure 7 shows a low magnification view using a light microscope. This photograph shows that the white deposit is not a continuous film, but does cover most of the filter surface. In order to obtain chemical information about the K in the deposit, including the light elements, x-ray photoelectron spectroscopy was used. Figure 8 shows the low resolution scan of the bulk. The high resolution scan as seen in Figure 8, shows the presence of a carbonate peak.


Since the deposit is primarily K, it is very likely to be a

February 15, 1983

compound like potassium carbonate. The remaining elements Al, Si, Pb and Fe constitute less than 3% of the deposit and are probably not significant in your search for a contaminate source.

I still have the sample. Let me know if you need additional data.

Sincerely,

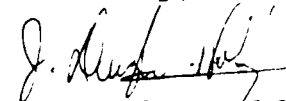

J. Douglas Wolf

JDW/lsh

Enclosures

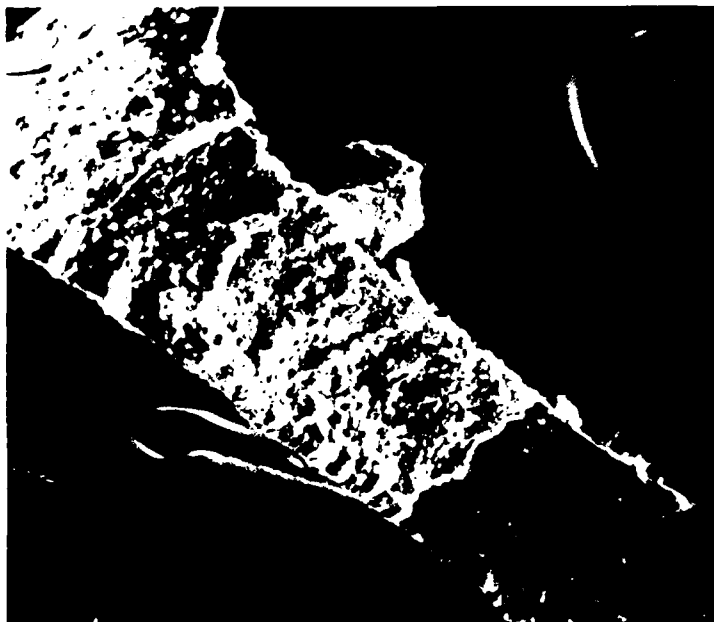


Figure A7-1. Deposit on filter (10X).

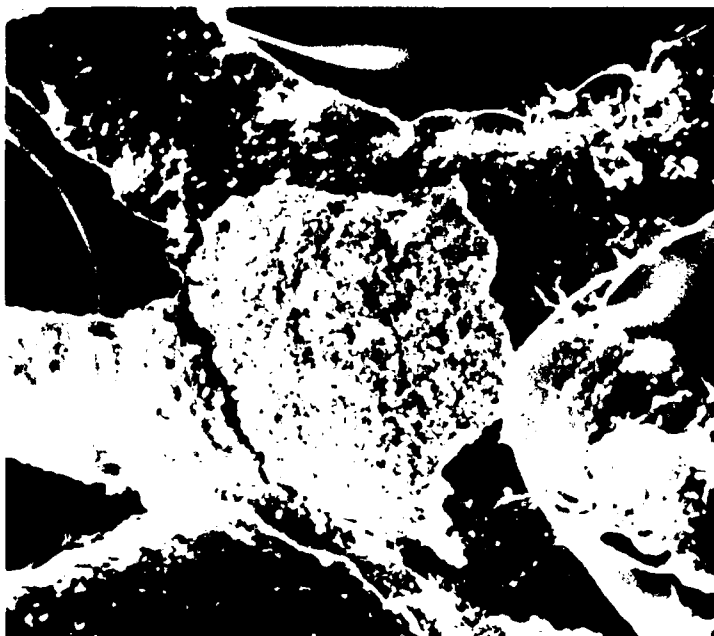


Figure A7-2. Deposit on filter (100X).

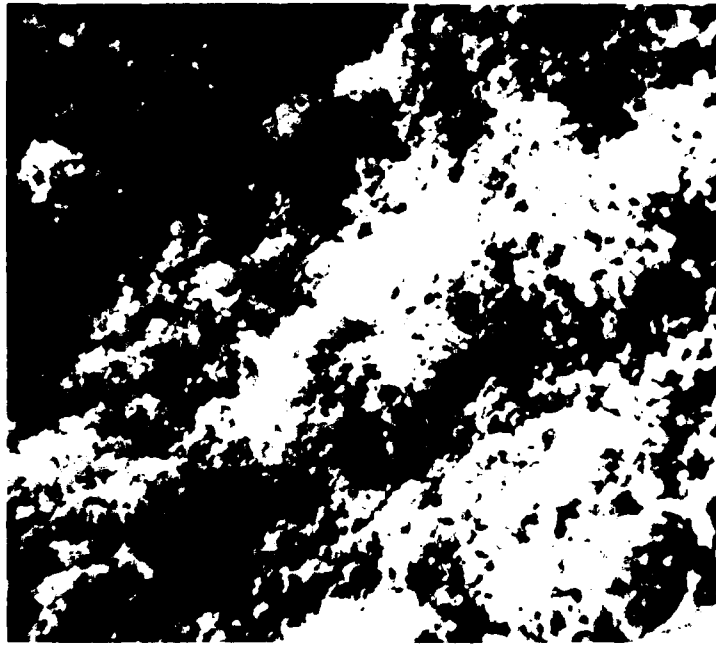


Figure A7-3. Deposit on filter (1000X).

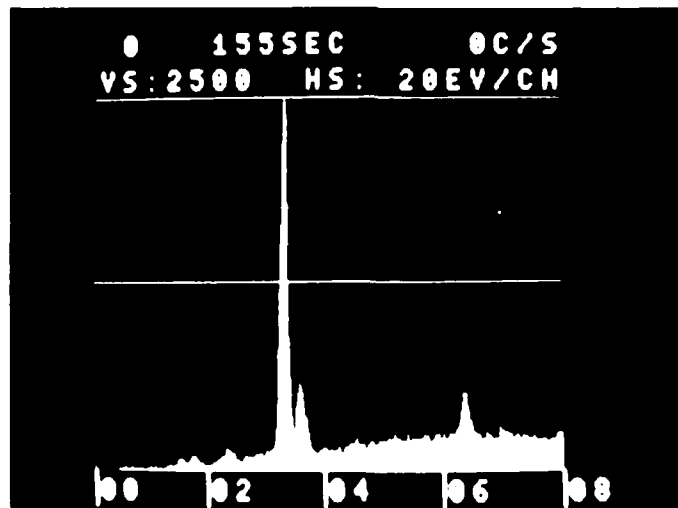


Figure A7-4. EDXA spectra of deposit on filter.

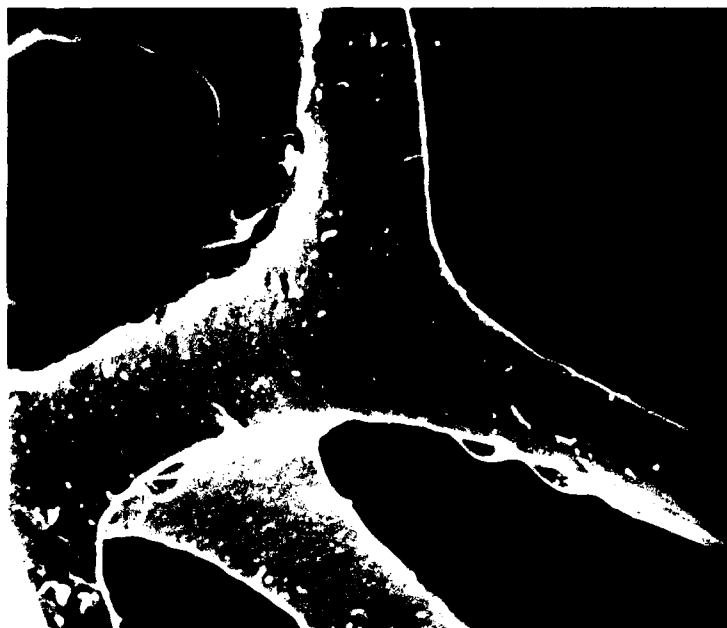


Figure A7-5. Control sample (100X).

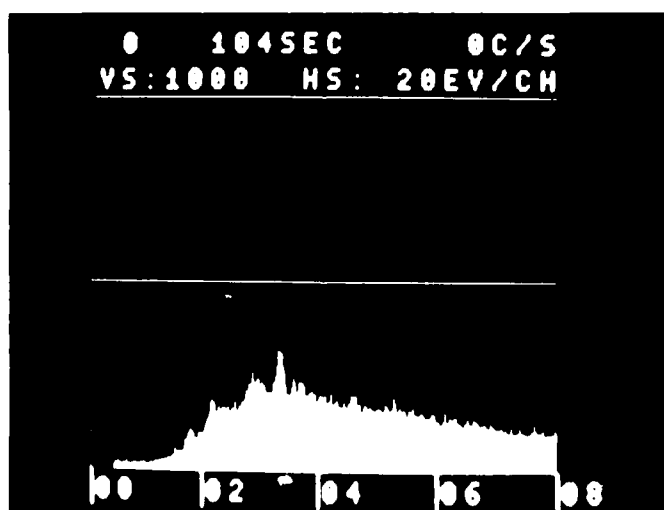


Figure A7-6. EDXA of control.

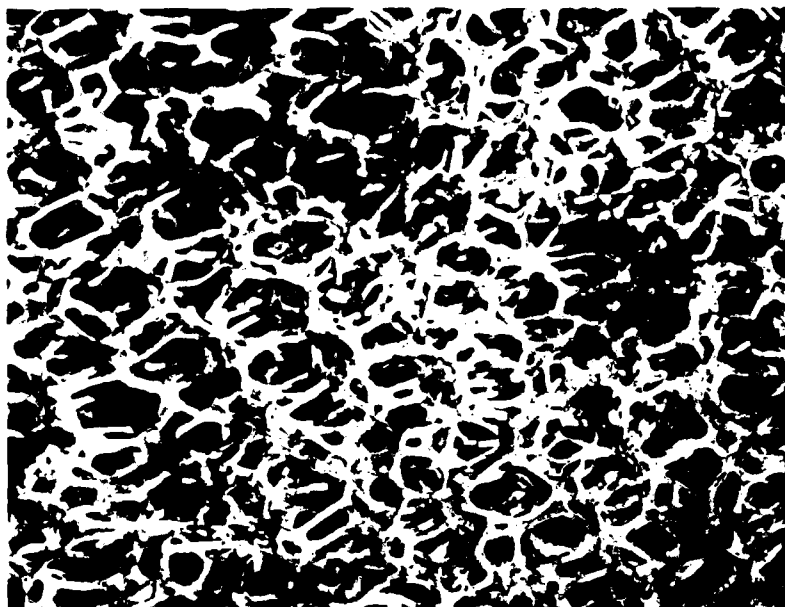


Figure A7-7. Light microscope photograph of deposit (white areas) 50X.

MO. CANTO CONTAMINATED FILTER

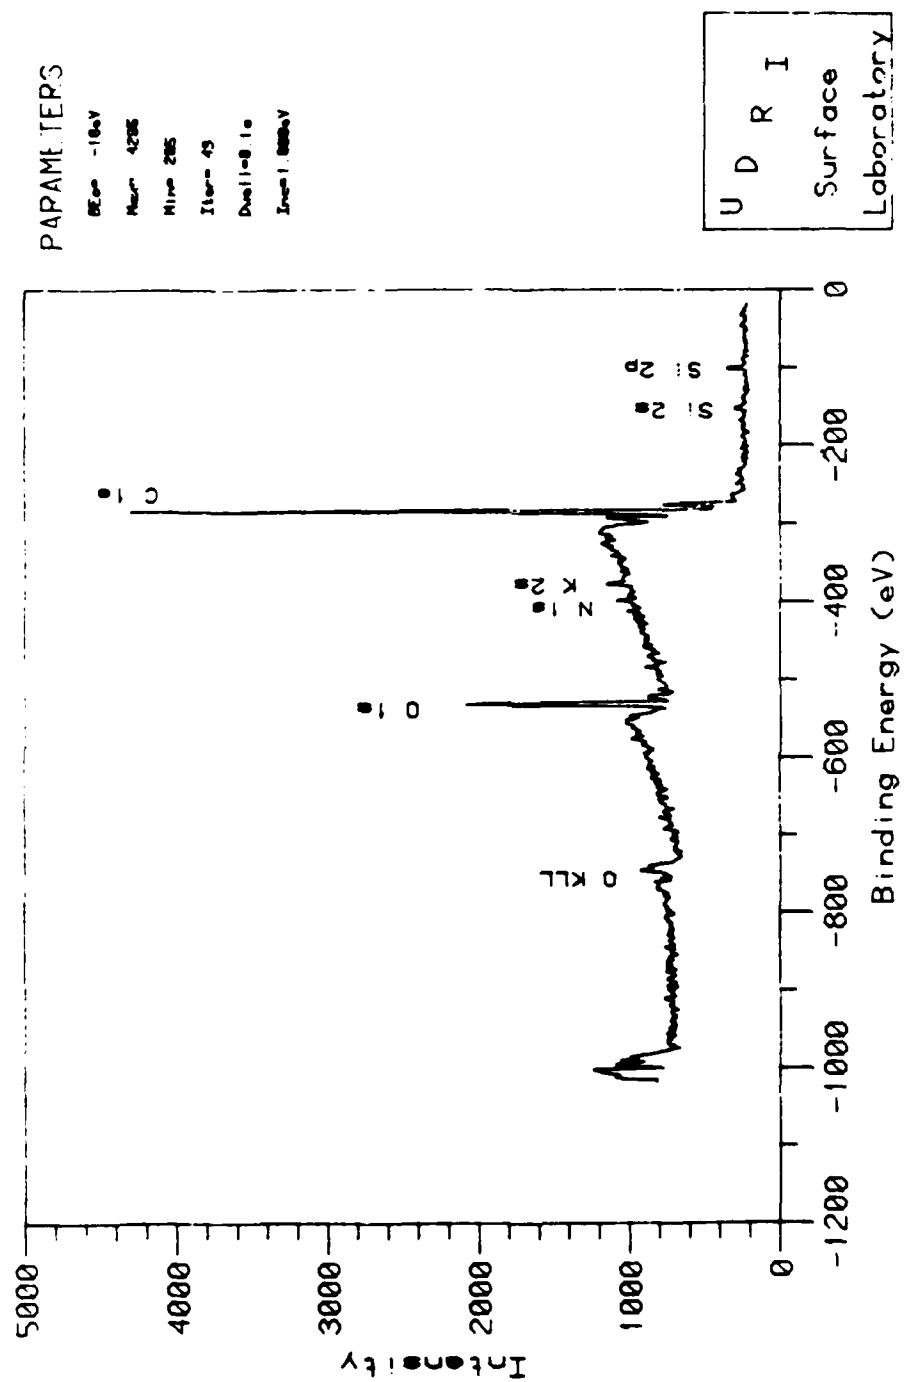


Figure A7-8. Low resolution XPS scan.

MONSANTO CONTAMINATED FILTER

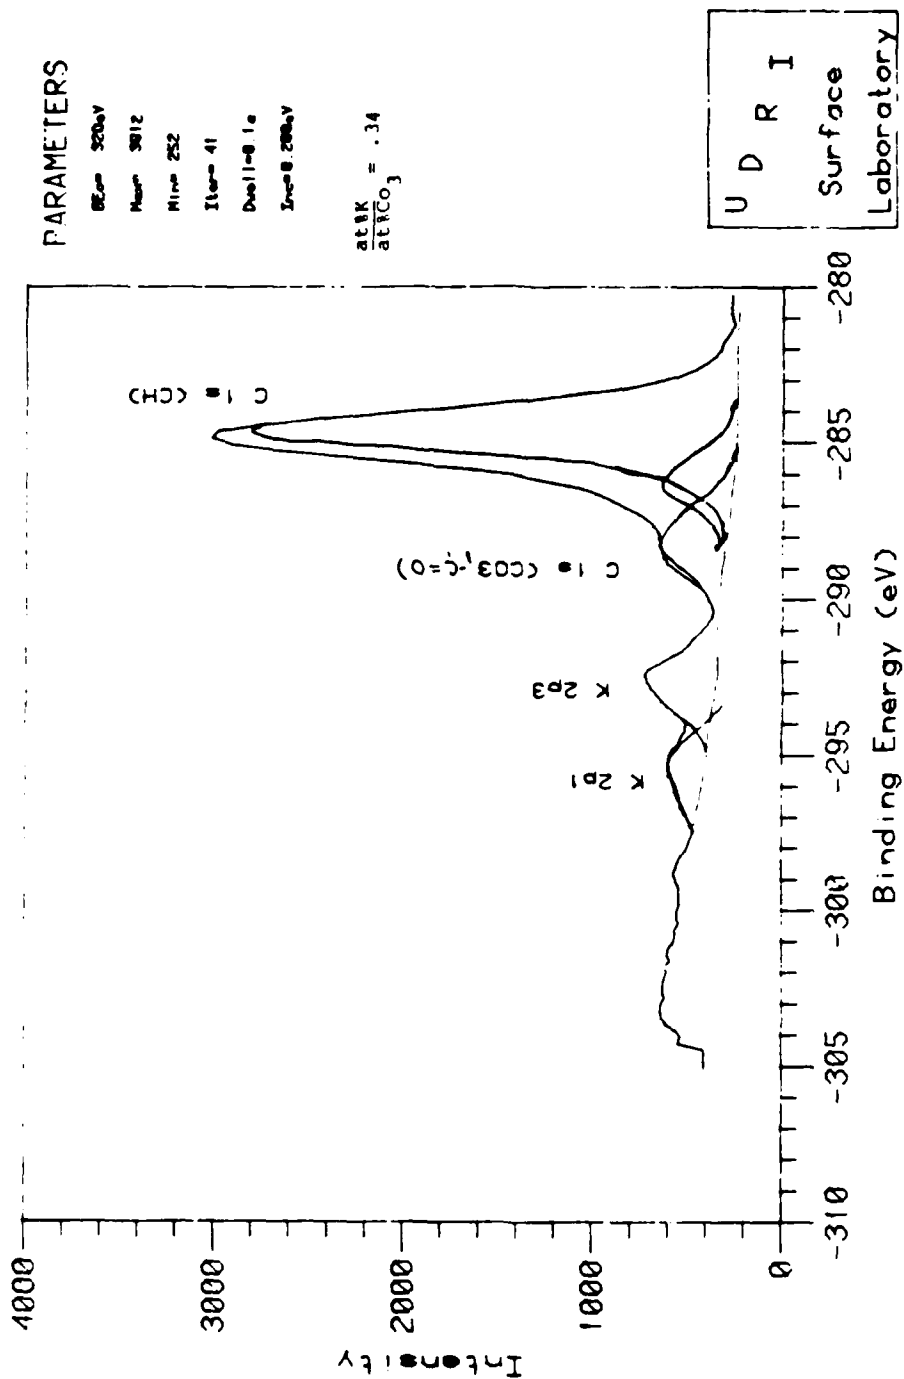


Figure A7-3. High resolution XPS scan.